

Exhibit No.: 016  
Issue(s): Energy Efficiency and  
Conservation  
Witness: Lauren M. Welikson  
Type of Exhibit: Direct Testimony  
Sponsoring Party: Union Electric Company  
File No.: GR-2019-0077  
Date Testimony Prepared: December 3, 2018

**MISSOURI PUBLIC SERVICE COMMISSION**

**FILE NO. GR-2019-0077**

**DIRECT TESTIMONY**

**OF**

**LAUREEN M. WELIKSON**

**ON**

**BEHALF OF**

**UNION ELECTRIC COMPANY**

**d/b/a AMEREN MISSOURI**

**St. Louis, Missouri  
December, 2018**

Ameren Exhibit No 16  
Date 8-15-19 Reporter CDT  
File No GR-2019-0077

**TABLE OF CONTENTS**

I. INTRODUCTION ..... 1

II. PURPOSE OF TESTIMONY ..... 2

III. PROPOSED ENERGY EFFICIENCY PLAN ..... 3

IV. NEW LOW-INCOME ENERGY EFFICIENCY PROGRAM ..... 6

V. CHANGES TO EXISTING ENERGY EFFICIENCY PROGRAMS..... 9

VI. APPROVAL OF TECHNICAL RESOURCE MANUAL ..... 10

VII. NEW RED TAG REPAIR PROGRAM ..... 11

VIII. CALCULATION OF CONSERVATION FOR RATES ..... 13

**DIRECT TESTIMONY**  
**OF**  
**LAUREEN M. WELIKSON**  
**FILE NO. GR-2019-0077**

**I. INTRODUCTION**

1  
2  
3  
4  
5  
6  
7  
8  
9  
10  
11  
12  
13  
14  
15  
16  
17  
18  
19

**Q. Please state your name and business address.**

A. My name is Lauren M. Welikson and my business address is Union Electric Company d/b/a Ameren Missouri ("Ameren Missouri" or "Company"), One Ameren Plaza, 1901 Chouteau Avenue, St. Louis, Missouri 63103.

**Q. What is your position with Ameren Missouri?**

A. I am a Senior Consultant in Energy Efficiency Evaluation & Strategy.

**Q. Please describe your educational background and employment experience.**

A. I received a Bachelor of Science degree in Electrical Engineering from the University of Illinois in 1986. I subsequently received a Master of Business Administration Degree from Colorado State University in 2001. During my college career, I completed an internship at Sargent & Lundy, LLC., a large firm that provides consulting, engineering, design, analysis, and project management services for power and generation projects worldwide. Upon completion of my bachelor's degree, I began working full time for Illinois Power Company as an engineer in the System Planning Department. I later worked in the Marketing Department at Illinois Power Company as a Competitive Development Engineer developing contracts to retain customers from competition such as cogeneration opportunities and other electric suppliers as Illinois deregulated.

1 I joined Ameren Services as a Business Development Executive in 2000,  
2 developing competitive contracts as the Company pursued opportunities to obtain  
3 customers in other utilities' service territories following deregulation. In 2004, I moved to  
4 a role in the regulatory group, primarily working on line extension policy and standards of  
5 conduct. In 2009, I was promoted to my current role as Senior Consultant in Energy  
6 Efficiency Evaluation & Strategy. In that role, I coordinate the evaluation of Ameren  
7 Missouri's energy efficiency programs, assist in the planning of those programs, and run  
8 cost effectiveness analyses of programs and measures. In 2015 I obtained certification as a  
9 Project Management Professional.

10 **II. PURPOSE OF TESTIMONY**

11 **Q. What is the purpose of your direct testimony in this proceeding?**

12 A. My direct testimony in this proceeding concerns proposed changes to  
13 Ameren Missouri's natural gas energy efficiency programs, including the addition of a low-  
14 income natural gas energy efficiency program, the use of a natural gas Technical Resource  
15 Manual, and a new red tag repair program. I also provide details for calculating  
16 conservation under Ameren Missouri's proposed Weather & Conservation Adjustment  
17 Rider ("WCAR").

18 **Q. What will the impact of these recommendations be on the revenue**  
19 **requirement?**

20 A. All these energy efficiency programs create a net zero impact on the  
21 Company's revenue requirement compared to the revenue requirement used to set rates in  
22 Ameren Missouri's last rate case. Funding for all of the proposed energy efficiency  
23 programs will not increase above the amount included in rates for similar programs in the

1 last rate case, plus the remaining regulatory liability amount associated with unspent energy  
2 efficiency dollars since that case.

3 **III. PROPOSED ENERGY EFFICIENCY PLAN**

4 **Q. Does Ameren Missouri currently run natural gas energy efficiency**  
5 **programs?**

6 A. Yes, Ameren Missouri currently has energy efficiency programs for  
7 customers that take service in either the Company's Residential or General Service natural  
8 gas rate classes. Under current energy efficiency programs, rebates are provided to  
9 Residential customers who replace equipment such as boilers, furnaces, water heaters,  
10 insulation, thermostats, and hot water measures such as faucet aerators and showerheads.  
11 Rebates are provided to General Service customers for many of the same measures as  
12 Residential customers; however, rebates to General Service customers also include steam  
13 traps and cooking measures.

14 **Q. Have conservation programs for gas customers been operated similar**  
15 **to the energy efficiency programs Ameren Missouri makes available to its retail**  
16 **electric customers?**

17 A. No, there is currently no plan for natural gas customers similar to the plan  
18 available to Ameren Missouri's electric customers because the Missouri Energy Efficiency  
19 Investment Act ("MEEIA") does not apply to natural gas utilities. Instead, funding for  
20 natural gas energy efficiency has been approved as part of a natural gas rate case. As  
21 authorized by the Commission in the Company's last natural gas rate case (File No.  
22 GR-2010-0363), each year Ameren Missouri collects \$700,000 from its customers. Of this  
23 total, \$437,000 has been set aside for natural gas energy efficiency programs and \$263,000

1 has been provided to the Missouri Division of Energy ("DE") for low-income  
2 weatherization programs.

3 **Q. What is included in the Natural Gas Energy Efficiency Plan Ameren**  
4 **Missouri is proposing in this case?**

5 A. The Natural Gas Energy Efficiency Plan Ameren Missouri is proposing in  
6 this case includes: (1) new energy efficiency programs for low-income customers, (2) the  
7 addition of a "custom" measure for Business<sup>1</sup> customers to allow gas transportation  
8 customers to participate, (3) use of a Natural Gas Technical Resource Manual for natural  
9 gas measures,<sup>2</sup> which is based upon the Missouri Statewide Technical Reference Manual,  
10 (4) a set-aside that would be used to fund a red tag program, (5) a portion of a new rider  
11 that would allow Ameren Missouri to recover the throughput disincentive associated with  
12 natural gas energy efficiency programs, and (6) the continued funding of the low-income  
13 weatherization programs. Each of these proposals is discussed in greater detail later in my  
14 direct testimony. Funding for the proposed low-income weatherization program would  
15 come from unspent funds set aside in prior years for energy efficiency.

16 **Q. What is the total budget of the Natural Gas Energy Efficiency Plan**  
17 **Ameren Missouri is proposing in this case?**

18 A. First, the Company proposes to keep the \$700,000 included in base rates in  
19 its last gas rate case at the same level going forward. Second, the Company proposes to  
20 earmark the same portion of that total approved in the last rate case for low-income  
21 weatherization programs -- \$263,000 -- except \$25,000 of that amount would be further

---

<sup>1</sup> The term "Business" refers to customers taking service under the Company's General Service or Transportation Service.

<sup>2</sup> This also includes measures that save both electricity and natural gas.

1 earmarked for a red tag repair program.<sup>3</sup> Lastly, the Company proposes to fund new low-  
2 income programs with its unspent regulatory liability from previously approved energy  
3 efficiency programs. Typically, regulatory liabilities are refunded to customers over a  
4 reasonable period (e.g., three years); therefore, the Company expects to use the unspent  
5 regulatory liability to fund low-income programs over a three-year period. Based on the  
6 Company's proposal, and the three-year amortization of the regulatory liability, program  
7 funding would be as follows:

Table 1 Estimated Three Year Budget

|                | 2020             | 2021             | 2022             | Total            |
|----------------|------------------|------------------|------------------|------------------|
| Residential    | \$ 349,600       | \$ 349,600       | \$ 349,600       | \$ 1,048,800     |
| Business       | \$ 87,400        | \$ 87,400        | \$ 87,400        | \$ 262,200       |
| New Low-Income | \$ 266,531       | \$ 266,531       | \$ 266,531       | \$ 799,594       |
| Weatherization | \$ 238,000       | \$ 238,000       | \$ 238,000       | \$ 714,000       |
| Red Tag        | <u>\$ 25,000</u> | <u>\$ 25,000</u> | <u>\$ 25,000</u> | <u>\$ 75,000</u> |
| Total          | \$ 966,531       | \$ 966,531       | \$ 966,531       | \$ 2,899,594     |

8 **Q. What is the anticipated energy savings from these programs?**

9 A. The anticipated savings, in therms, for these programs is as follows:

Table 2 Estimated Energy Savings

|                | 2020          | 2021          | 2022          | Total         |
|----------------|---------------|---------------|---------------|---------------|
| Residential    | 229,559       | 229,559       | 229,559       | 688,678       |
| Business       | 23,497        | 23,497        | 23,497        | 70,492        |
| New Low-Income | <u>27,922</u> | <u>27,922</u> | <u>27,922</u> | <u>83,767</u> |
| Total          | 280,979       | 280,979       | 280,979       | 842,937       |

---

<sup>3</sup> The proposed weatherization budget is \$238,000 and the tariff for weatherization has been updated accordingly and attached as Schedule LMW-D1.

1           **Q.     What is the anticipated cost-effectiveness of the programs?**

2           A.     Based on the Total Resource Cost Test ("TRC") and the Utility Cost Test  
3 ("UCT"), as defined in the Commission's MEEIA rules, anticipated cost-effectiveness for  
4 the programs is as follows:

Table 3 Estimated Cost Effectiveness Results

| TRC            | 2020 | 2021 | 2022 | Total 3 Year |
|----------------|------|------|------|--------------|
| Residential    | 3.45 | 3.36 | 3.28 | 3.36         |
| Business       | 1.20 | 1.17 | 1.15 | 1.17         |
| New Low-Income | 1.12 | 1.09 | 1.06 | 1.09         |
| Combined       | 2.55 | 2.48 | 2.42 | 2.48         |

| UCT            | 2020 | 2021 | 2022 | Total 3 Year |
|----------------|------|------|------|--------------|
| Residential    | 6.84 | 6.67 | 6.50 | 6.67         |
| Business       | 2.49 | 2.43 | 2.37 | 2.43         |
| New Low Income | 1.12 | 1.09 | 1.06 | 1.09         |
| Combined       | 4.13 | 4.03 | 3.93 | 3.76         |

5           **Q.     What will happen in the event the Company spends more or less than**  
6 **the Commission approved program budget?**

7           A.     Following the current procedures, the Company will track the difference of  
8 actual program costs compared to the approved budget using a regulatory asset or liability.

9           **IV.    NEW LOW-INCOME ENERGY EFFICIENCY PROGRAM**

10          **Q.     Why is Ameren Missouri proposing a low-income natural gas energy**  
11 **efficiency program?**

12          A.     We believe this market is underserved by current natural gas energy  
13 efficiency programs. The low-income weatherization program run by the DE has a cap on  
14 the amount they are allowed to spend per home. Consequently, DE is prevented from  
15 providing all of the energy efficiency measures that these homes may need, such as  
16 insulation, windows, a new water heater, and a new furnace. In addition, a home can only



1 be weatherized once no matter the level of project completed for that property unless the  
2 prior weatherization occurred prior to September 30, 1994. The Company's existing natural  
3 gas energy efficiency programs only provide a moderate incentive based on the incremental  
4 cost difference between an efficient measure and a standard baseline unit for that measure.  
5 That incentive level is not enough for low-income customers to overcome the high total  
6 cost of the measure they need to install. The proposed low-income program would provide  
7 higher incentives to help overcome the upfront cost. In order to limit the amount that must  
8 be provided, the program would work with other funding sources, including government  
9 grants and electric energy efficiency programs, to share the funding of energy efficient  
10 measures.

11 **Q. How did Ameren Missouri arrive at the proposed budget for this**  
12 **program?**

13 A. Over the past few years, Ameren Missouri has not spent the entire budget  
14 allocated to its natural gas energy efficiency programs (\$437,000). During each of those  
15 years, unexpended funds were set aside in a regulatory liability account. The proposed  
16 budget for new low-income energy efficiency program allocates the regulatory liability  
17 entirely as a one-time budget increase to fund the low-income program. As of the end of  
18 the proposed test year in this rate case (June 30, 2018), this amount was \$799,594, which  
19 is anticipated to be sufficient to fund the program for three years.

1           **Q. Will this program provide incentives for multi-family properties or**  
2 **only single-family properties?**

3           A. Both. It is anticipated that Ameren Missouri's natural gas operations will  
4 partner with existing and proposed electric low-income programs that provide incentives  
5 to both multifamily and single-family low income customers.

6           **Q. Are customers required to participate in a partnering electric energy**  
7 **efficiency program in order to participate in the proposed gas energy efficiency**  
8 **programs?**

9           A. No. While Ameren Missouri's natural gas operation intends to partner with  
10 its electric energy efficiency programs as much as possible in order to better serve  
11 customers who receive both natural gas and electric services and to share the costs of  
12 measures that save both electricity and natural gas, customers would not be required to  
13 participate in an electric program in order to participate in the natural gas energy efficiency  
14 program.

15           **Q. How will customers qualify for the low-income program?**

16           A. Customers can qualify in one of two ways. If they are participating in an  
17 Ameren Missouri electric low-income energy efficiency program, they will automatically  
18 be eligible for the natural gas low-income program. If they are not participating in an  
19 electric energy efficiency low-income program, they must meet at least one of the  
20 following requirements<sup>4</sup> to participate in the proposed natural gas program:

21           1. Reside in federal, state, or local subsidized housing and fall within that  
22           program's income guidelines.

---

<sup>4</sup> These are the same requirements as Ameren Missouri's electric low income programs.

- 1                   2. Reside in non-subsidized housing with proof of income levels at or below  
2                   80% of the area median income ("AMI").
- 3                   3. Fall within a census tract that indicates at least 85% of customers are at or  
4                   below 80% of AMI.

5                   **V. CHANGES TO EXISTING ENERGY EFFICIENCY PROGRAMS**

6                   **Q. What changes are being proposed to the Company's existing natural**  
7 **gas energy efficiency programs?**

8                   A. The two primary changes to the existing natural gas program are related to  
9 the business customers. First, I am proposing to open the business program to customers  
10 who take natural gas transportation service. Second, I am proposing to add a "custom"  
11 measure to the program to open the program to more savings opportunities that are cost  
12 effective but are not specifically stated on the prescriptive list. Revised tariffs for the  
13 natural gas energy efficiency programs including the addition of a low income program are  
14 included in my Schedules LMW-D2 and LMW-D3.

15                  **Q. Are these changes expected to result in additional savings?**

16                  A. Yes, I believe opening the programs to a larger pool of customers and  
17 allowing unique projects to qualify for incentives will result in additional savings.

18                  **Q. Is there a relationship between making these program changes and the**  
19 **Company's rate design and WCAR proposal?**

20                  A. Yes. Effective mitigation of the throughput disincentive has a direct  
21 relationship to these proposed changes; otherwise taking steps to produce additional natural  
22 gas savings will systematically weaken the Company's ability to recover its costs.

1           **VI. APPROVAL OF TECHNICAL RESOURCE MANUAL ("TRM")**

2           **Q. Is the Company requesting the Commission to approve a Natural Gas**  
3 **TRM?**

4           A. Yes. The Company recognizes that parties have put effort into the  
5 development of a draft statewide TRM and believes this case is a good opportunity for the  
6 Commission to approve a TRM for natural gas measures.

7           **Q. Has the Company provided a Natural Gas TRM for approval?**

8           A. Yes. The Company started with the draft statewide TRM version, isolated  
9 measures that provide natural gas savings, and made limited additions and modifications.  
10 The proposed Natural Gas TRM is included in three schedules:

- 11           • Schedule LMW-D4 Gas TRM Volume 1 – Overview and User's Guide
- 12           • Schedule LMW-D5 Gas TRM Volume 2 – C and I Measures
- 13           • Schedule LMW-D6 Gas TRM Volume 3 – Residential Measures

14           In addition, the calculated results of the algorithms in the Natural Gas TRM with  
15 Ameren Missouri inputs are included as Schedule LMW-D7 Ameren Missouri Natural Gas  
16 Deemed Savings Table.

17           **Q. Does the Company support the approval of its provided Natural Gas**  
18 **TRM as a Statewide Natural Gas TRM?**

19           A. Yes. Since other natural gas utilities have energy efficiency programs, the  
20 Commission may find it useful to have consistency across utilities. The Company is  
21 supportive of participating in the appropriate proceeding leading to adoption of a Statewide  
22 Natural Gas TRM.

1           **Q.    How would a Statewide Natural Gas TRM be updated and**  
2 **administered?**

3           A.    I propose the Commission Staff be the ultimate owner of the Statewide  
4 Natural Gas TRM, but I expect it to be a shared responsibility from all regulatory  
5 stakeholders. I realize Staff is busy and additional responsibilities should not be taken  
6 lightly; however, given there are already ongoing collaborative efforts in the natural gas  
7 business I believe that we can carve out some time here and there to manage the Statewide  
8 Natural Gas TRM as a collaborative effort with Staff helping to coordinate and officiate  
9 the efforts. There is no need for an intense and/or rigid update process.

10                               **VII.    NEW RED TAG REPAIR PROGRAM**

11           **Q.    Please describe the purpose of the proposed red tag repair program.**

12           A.    The proposed red tag repair program is designed to help low-income  
13 customers retain natural gas service in the event unexpected repairs are needed. For  
14 instance, during the normal course of business (e.g. a gas smell, a meter inspection, etc.) it  
15 may be determined there is an unsafe appliance or piping that requires service be  
16 disconnected (a.k.a., "red tagged"). The proposed program makes funds available to make  
17 repairs to prevent service disconnection. Natural gas service interruption, especially during  
18 the heating season, can be very disruptive, so a program like this offers an important  
19 opportunity to resolve equipment and piping issues quickly to prevent or minimize service  
20 interruptions.

21           **Q.    Who qualifies for the proposed red tag repair program?**

22           A.    This will be a program for low-income customers; that is, those customers  
23 with an income at or below 80% of the AMI.

1           **Q.     What specific services and resources are available for qualifying**  
2 **customers?**

3           A.     There are two primary components of the red tag repair program:  
4 (1) funding to allow a third party to make repairs to equipment and/or piping and  
5 (2) permission for an Ameren Missouri utility worker or contractor to use a limited amount  
6 of effort and resources to make repairs. For equipment and/or piping repairs, no customer  
7 shall receive assistance greater than \$1,000, with no more than \$700 going toward  
8 permanent space heating equipment repairs and no more than \$450 going toward each other  
9 gas appliance or piping. For minor repairs that would otherwise result in a red tag, an  
10 Ameren Missouri utility worker or contractor is allowed no more than 15 minutes using  
11 parts that cost \$20 or less to perform the repair and prevent service. Details are provided in  
12 the proposed tariff, attached to my testimony as Schedule LMW-D8.

13           **Q.     What is the proposed budget and source of funding for the proposed**  
14 **red tag repair program?**

15           A.     As I explained earlier in my direct testimony, the Company is proposing to  
16 repurpose \$25,000 from the low-income weatherization funds for the new red tag repair  
17 program. Using this source of funding will enable this new service without adding an  
18 additional cost to the revenue requirement in this case.

19           **Q.     Do other natural gas utilities in Missouri have a similar red tag repair**  
20 **program?**

21           A.     While I have not surveyed all of the natural gas providers in Missouri, the  
22 proposed program is essentially the same program offered by Spire.

1           **VIII.    CALCULATION OF CONSERVATION FOR RATES**

2           **Q.    Mr. Harding has provided testimony about the Company's proposed**  
3 **WCAR calculation. Please provide a summary of how the Conservation component**  
4 **will be determined.**

5           A.    The first input required for the monthly calculation is the Ccf savings<sup>5</sup> by  
6 end-use category by rate class. Monthly load shapes by end-use category are used to  
7 distribute types of energy savings (which are reported as annualized Ccf savings) across  
8 the months in the year to better reflect the seasonality of the savings that were achieved.  
9 For example, the heating category has most of its savings during the winter months while  
10 the water heating category has savings spread out more evenly. The end-use categories and  
11 load shapes are included in the WACR rider. The conversion to monthly savings data  
12 allows the Company to determine current month energy savings<sup>6</sup> as well as cumulative  
13 monthly energy savings from prior month energy savings activities. As energy savings are  
14 incorporated into base rates, the cumulative monthly savings are reduced to avoid double  
15 counting. The process of including savings in base rates and rebasing the throughput  
16 disincentive is discussed further below. The proposed Natural Gas TRM expresses savings  
17 as therms; therefore a conversion to Ccf is necessary to match billing practices. To convert  
18 the TRM therm savings to Ccf, the Company will use its existing processes and conversion  
19 factors inherent in its ongoing accounting practices.<sup>7</sup> This monthly savings (current month

---

<sup>5</sup> A net-to-gross ("NTG") of 1.0 will be used for these calculations as the rider mechanism covers all directly quantifiable conservation from energy efficiency not just those savings attributable to Ameren Missouri's programs.

<sup>6</sup> Current month savings are divided by 2 to reflect a "half-month" convention, which reflects the fact that not all measures were installed on day 1 of a month just as all measures were not installed on the last day of the month.

<sup>7</sup> Customers are billed in Ccf, but the Company's accounting system reports therms which inherently relies on the creation of monthly conversion factors that are based on the characteristics of natural gas that were delivered in that month.

1 plus cumulative savings less savings included in base rates) by rate class is then multiplied  
2 by the appropriate margin rate to arrive at the monthly dollar value of throughput  
3 disincentive by rate class.

4 When base rates are adjusted, upon the conclusion of a general rate proceeding or  
5 otherwise, the cumulative, annualized, and normalized (at a net-to-gross factor of 1.0) Ccf  
6 savings from all active programs will be reflected in the unit sales and retail revenues used  
7 in setting the rates through the rate case true-up period. Upon the adjustment for the Ccf  
8 savings in the rate case, the throughput disincentive will be rebased to subtract the Ccf  
9 savings that are reflected in the billing units used to establish new rates from the cumulative  
10 Ccf savings when the rates take effect.

11 **Q. Is this process being used in other approved recovery mechanisms?**

12 A. Yes. The Company is proposing a process identical to the process that has  
13 been in operation under MEEIA since 2016 and recently included as part of the Company's  
14 MEEIA 2019-21 plan. In fact, the process is so similar that we are using the same  
15 spreadsheets to perform the calculations but with inputs relevant to natural gas.

16 **Q. Does this conclude your direct testimony?**

17 A. Yes, it does.



**BEFORE THE PUBLIC SERVICE COMMISSION  
OF THE STATE OF MISSOURI**

In the Matter of Union Electric Company                    )  
d/b/a Ameren Missouri's Tariffs to Increase Its        )  
Revenues for Natural Gas Service.                        )       File No. GR-2019-0077

**AFFIDAVIT OF LAUREEN M. WELIKSON**

STATE OF MISSOURI    )  
                                  ) ss  
CITY OF ST. LOUIS     )

Laureen M. Welikson, being first duly sworn on his oath, states:

1.       My name is Laureen M. Welikson. I work in the City of St. Louis, Missouri, and I am employed by Union Electric Company d/b/a Ameren Missouri as Senior Consultant in Energy Efficiency Evaluation & Strategy.

2.       Attached hereto and made a part hereof for all purposes is my Direct Testimony on behalf of Union Electric Company d/b/a Ameren Missouri consisting of 14 pages and Schedule(s) LMW-D1 to LMW-D8, all of which have been prepared in written form for introduction into evidence in the above-referenced docket.


3.       I hereby swear and affirm that my answers contained in the attached testimony to the questions therein propounded are true and correct.

Laureen M Welikson  
Laureen M. Welikson

Subscribed and sworn to before me this 29<sup>th</sup> day of November, 2018.

Cathleen A Dehne  
Notary Public

My commission expires:  
March 7, 2021

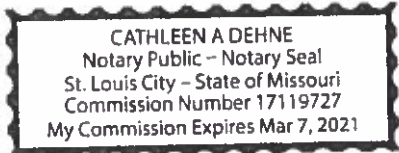

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to \_\_\_\_\_ MISSOURI SERVICE AREA

## WEATHERIZATION PROGRAM

### PURPOSE

This voluntary Weatherization Program (Program) is intended to assist qualified residential gas customers in reducing their use of energy through weatherization and conservation.

### AVAILABILITY

This voluntary Program is available to customers receiving service under the Company's Residential Service Rate and who meet the customer eligibility requirements.

### TERMS AND CONDITIONS

- a. Pursuant to the Order issued by the Missouri Public Service Commission (MPSC) in Case No. GR-2019-0077, the Company will provide \$238,000 annually (the Program funds) for a residential weatherization grant program, including energy education, for primarily lower income customers. The Program is administered by the Missouri Division of Economic Development (MDED).
- b. The Program funds will be forwarded to the State Environmental Improvement and Energy Resources Authority (EIERA) for administration by MDED.
- c. The Program offers grants for weatherization services to eligible customers and will be primarily directed to lower income customers.
- d. The total amount of grants offered to an individual customer for improvements that can be made to their residence will be determined by using the National Energy Audit Tool (NEAT) software or other MDED approved audit tool. The grants and improvements offered will be consistent with the federal weatherization assistance program administered by MDED.
- e. The Company will retain at least two years of post-weatherization usage and payment history for each customer's residence that is weatherized.

DATE OF ISSUE December 3, 2018                      DATE EFFECTIVE January 2, 2018

ISSUED BY Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

## MISSOURI ENERGY EFFICIENT NATURAL GAS EQUIPMENT AND BUILDING SHELL MEASURE REBATE PROGRAMS

### **APPLICATION**

The Missouri Energy Efficient Natural Gas Equipment and Building Shell Measure Rebate Programs (Program) is designed to encourage more effective utilization of natural gas by encouraging cost effective energy efficiency improvements through the replacement of less efficient natural gas equipment with high efficient ENERGY STAR® Qualified natural gas equipment and other high efficiency equipment and building shell measures.

Rebates are being offered on a limited basis for a portion of the cost of Measures purchased by Participants.

### **DEFINITIONS**

ACH - Air Changes per Hour: ACH represents how many times per hour the air volume inside the living space is naturally replaced by outside air due to air leaks. ACH measurements vary according to the "air-tightness" of the building shell.

Administrator - Company will administer the Program through a contractor experienced in energy efficiency rebate programs.

AFUE - Annual Fuel Utilization Efficiency: Energy efficiency rating measure determined, under specific testing conditions, by dividing the energy output by the energy input. It is a measure of the heat actually delivered by a furnace to the structure compared to the heat potential in amount of fuel supplied to the furnace. For example, a furnace that has a 92% AFUE rating converts 92% of the fuel supplied as heat to the structure - the other 8% is lost as exhaust. This information is available on every furnace sold in the United States.

CUSTOM REBATE - The rebate program will make available custom rebates to business customers for the installation of any natural gas related energy efficiency improvement that does not qualify for a prescriptive rebate. All custom rebates will be individually determined and analyzed prior to installation to ensure that the Total Resource Cost Test is 1.0 or higher. The maximum allowable rebate per customer is \$25,000.

EEAG - Energy Efficiency Advisory Group: Includes representatives from the Company, the Commission Staff, Office of the Public Counsel (OPC), and the Division of Energy. The EEAG will function as an advisory group for this Program.

DATE OF ISSUE December 3, 2018                      DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

**MISSOURI ENERGY EFFICIENT NATURAL GAS  
EQUIPMENT AND BUILDING SHELL MEASURE REBATE PROGRAMS (cont'd)**

**DEFINITIONS (cont'd)**

ENERGY STAR® - A voluntary labeling program designed to identify and promote energy efficient products to reduce energy expenses and greenhouse gas emissions. ENERGY STAR® is a joint program of the U.S. Environmental Protection Agency and the U.S. Department of Energy.

Measure - The replacement of less efficient natural gas equipment with high efficient ENERGY STAR® Qualified natural gas equipment and other high efficiency equipment and building shell measures.

Participant - A customer who is being served under either the Company's Residential, General, or Transportation Service natural gas rate class, is located in Missouri, and elects to either purchase or agrees to receive energy efficient gas saving equipment as described in the Measures. For purposes of receiving rebates under this Program, a Participant is defined as a person, firm, organization, association, corporation, landlord, contractor or other entity that implements Measure(s) and submits a rebate form(s) and documentation.

Qualified Auditor - A nationally recognized contractor trained in natural gas equipment utilization systems and commercial and/or residential structures as an integrated whole building system. Residential training, certification, and accreditation are provided by the Building Performance Institute (BPI) and Residential Energy Services Network's (RESNET®). Commercial training and certification are provided by nationally-respected energy auditor certification organizations. Approved Energy Auditors are found by calling the Company at 1-800-552-7583 or on the internet at <http://www.ded.mo.gov/asp/energy/auditors.htm> or <http://www.bpi.org/locator-tool/find-a-contractor>.

Rebate Range Sheet - The list of Measures to be offered to Participants along with the minimum and maximum rebate level permitted for each Measure.

Retailer - Any retailer which has agreed to sell ENERGY STAR® Qualifying or other high efficient natural gas equipment, or provider of energy efficiency services, associated with the Measures.

**AVAILABILITY**

The Program is voluntary. A Participant may receive rebates, for the quantities listed for each Measure, each calendar year. Rebates must be redeemed through the Administrator. High Efficiency and ENERGY STAR® Equipment availability may vary by each Participating Retailer throughout the Company's territory.

Residential rebates apply only to Residential customers, or their landlords purchasing Measures listed as Residential in the Rebate Range Sheet.

**DATE OF ISSUE** December 3, 2018                      **DATE EFFECTIVE** January 2, 2019

**ISSUED BY** Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

**MISSOURI ENERGY EFFICIENT NATURAL GAS  
EQUIPMENT AND BUILDING SHELL MEASURE REBATE PROGRAMS (cont'd)**

**AVAILABILITY (cont'd)**

General Service and Transportation Service rebates apply only to General Service and Transportation Service customers purchasing Measures listed as Business in the Rebate Range Sheet.

Program details regarding the interaction between the Company or Program Administrators and Participants in the Program, such as available Measures, Measure ranges, availability of the Program, eligibility, and application and completion requirements may be adjusted through the change process as presented below. Those details, additional details on each Measure, and other details such as process flows, application instructions, and application forms will be provided on the Company's website [AmerenMissouri.com/naturalgas](http://AmerenMissouri.com/naturalgas), or by calling toll free 1-800-552-7583

**CHANGE PROCESS**

The change process is applicable to changes in a Measure detail regarding the interaction between the Company or Program Administrators and Participants in the Measures.

1. Identify need for Measure detail change regarding the interaction between the Company or Program Administrators and Participants in the Measures;
2. Discuss proposed change with implementer;
3. Analyze impact on Program and portfolio (Cost effectiveness, goal achievement, etc.);
4. Inform the Staff, Office of the Public Counsel, and the Missouri Department of Economic Development - Division of Energy (DE) of the proposed change, the time within which it needs to be implemented, provide them the analysis that was done and consider recommendations from them that are received within the implementation timeline (the implementation timeline shall be no less than five business days from the time that the Staff, Office of the Public counsel, and the DE are informed and provided the above-referenced analysis);
5. Take timely received recommendations into account and incorporate them where the Company believes it is appropriate to do so;
6. Notify and train customer contact personnel (Contact Center, Energy Advisors, Business Center, Key Account Executives, Customer Service Advisors) of the changes;
7. Make changes to forms and promotional materials;
8. Update Program website;
9. Provide updated web pages and, if appropriate, updated list of Measures and rebate amounts to Staff; and
10. Inform Participants, Trade Allies, etc. Company will also continue to discuss and provide information on ongoing Program and portfolio progress at quarterly regulatory stakeholder update meetings.

DATE OF ISSUE December 3, 2018                      DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

**MISSOURI ENERGY EFFICIENT NATURAL GAS  
EQUIPMENT AND BUILDING SHELL MEASURE REBATE PROGRAMS (cont'd)**

**CHANGES IN MEASURES OR REBATES**

Company may offer the Measures contained in Company's Rebate Range Sheet. The offering of Measures not contained within Company's Rebate Range Sheet must be approved by the Commission. Not all Measures listed in the Rebate Range Sheet will be offered at all times. The actual Measures being offered, and rebates available to Participants, will be listed on Company's website, [AmerenMissouri.com/naturalgas](http://AmerenMissouri.com/naturalgas). The Measures and rebates being offered are subject to change - Participants must consult [AmerenMissouri.com/naturalgas](http://AmerenMissouri.com/naturalgas) for the list of currently available Measures. The website will expressly state in conspicuous language that the Measures and rebates are subject to change.

**REBATES**

Each Participant will receive a rebate check from the Administrator within six (6) to eight (8) weeks after the completed Rebate Form is submitted with proper documentation. Rebate Forms, applications and protocols are available on the Company's Website [AmerenMissouri.com/naturalgas](http://AmerenMissouri.com/naturalgas) or by calling Ameren Missouri at 314-342-1111 or 800-552-7583.

**PROGRAM TERM**

The Program will conclude on December 31, 2022 or at the time new rates go into effect as a result of a general rate proceeding, whichever occurs first. All installations of Measures must occur before the conclusion date of the Program to qualify for a rebate. All rebate forms for this Program must be submitted and post-marked not later than one month after the conclusion date of the Program.

DATE OF ISSUE December 3, 2018

DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn  
Name of Officer

President  
Title

St. Louis, Missouri  
Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

**MISSOURI ENERGY EFFICIENT NATURAL GAS  
EQUIPMENT AND BUILDING SHELL MEASURE REBATE PROGRAMS (cont'd)**

**REBATE RANGE SHEET - RESIDENTIAL & LANDLORD MEASURES**

| <u>Measure</u>  | <u>Max Number<br/>of Rebates</u> | <u>Minimum Rebate<br/>Level<br/>(\$/Measure)</u> | <u>Maximum Rebate<br/>Level<br/>(\$/Measure)</u> |
|---|----------------------------------|--|--|
| Programmable Thermostat   | 2                                | \$0  | \$50   |
| Learning Thermostat   | 2                                | \$25   | \$125  |
| Natural Gas Furnace (Tier 1) AFUE rated 92% to 95.9%                      | 2 (Note 1)                       | \$100  | \$300  |
| Natural Gas Furnace (Tier 2) AFUE rated 96% or higher                     | 2 (Note 1)                       | \$200  | \$450  |
| Natural Gas Boiler (Tier 1) AFUE rated 85% to 89.9%                       | 2 (Note 1)                       | \$50   | \$300  |
| Natural Gas Boiler (Tier 2) AFUE rated 90% or higher                      | 2 (Note 1)                       | \$200  | \$450  |
| Natural Gas Tank Storage Water Heater, 20-55 gal, EF rating .67 or higher | 2                                | \$100  | \$300  |
| Natural Gas Tankless water heater EF rating .9 or higher                  | 2                                | \$200  | \$400  |
| Ceiling Insulation R30 to R49   | \$200                            | \$.004 per sf<br>x ΔR                            | \$.02 per sf<br>x ΔR                             |
| Wall Insulation, minimum rating or R11                                    | \$400                            | \$.04 per sf<br>x ΔR                             | \$.07 per sf<br>x ΔR                             |
| Hot Water Measure Kit (1-shower head, 2-aerators, 10 ft pipe wrap)        | 2                                | \$0  | \$25   |
| Ceiling Insulation R30 to R49 w/Audit                                     | \$400                            | \$.004 per sf<br>x ΔR                            | \$.02 per sf<br>x ΔR                             |
| Wall Insulation, minimum rating or R11 w/Audit                            | \$800                            | \$.04 per sf<br>x ΔR                             | \$.07 per sf<br>x ΔR                             |
| Air Sealing Measure w/Audit   | \$200                            | \$150  | \$350  |
| Duct Sealing Measure w/Audit  | \$200                            | \$150  | \$350  |
| Low Flow Faucet Aerator   | 1/faucet                         | \$0  | \$15   |
| Low Flow Showerhead   | 1/shower                         | \$0  | \$15   |
| Pipe Wrap   | No Limit                         | \$0  | \$10   |
| Hot Water Measure Kit w/Audit   | 2                                | \$0  | \$40   |
| H.E. Boiler (side-arm tank)   | 2                                | \$300  | \$600  |
| Furnace Tune-up   | 2                                | 25% of<br>Incremental<br>Cost                    | 75% of<br>Incremental<br>Cost                    |
| Boiler Tune-up  | 2                                | 25% of<br>Incremental<br>Cost                    | 75% of<br>Incremental<br>Cost                    |

Note (1): For Landlords a maximum of ten (10) units or 10% of the total units whichever is greater

DATE OF ISSUE December 3, 2018                      DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

**MISSOURI ENERGY EFFICIENT NATURAL GAS  
EQUIPMENT AND BUILDING SHELL MEASURE REBATE PROGRAMS (cont'd)**

**REBATE RANGE SHEET - BUSINESS MEASURES**

| <u>Measure</u>  | <u>Max Number<br/>of Rebates</u> | <u>Minimum Rebate<br/>Level<br/>(\$/Measure)</u> | <u>Maximum Rebate<br/>Level<br/>(\$/Measure)</u> |
|---|----------------------------------|--|--|
| Programmable Thermostat   | 2                                | \$1  | \$50   |
| Learning Thermostat   | 2                                | \$25   | \$125  |
| Natural Gas Furnace (Tier 1) AFUE rated 92% to 95.9%                      | 10                               | \$100  | \$300  |
| Natural Gas Furnace (Tier 2) AFUE rated 96% or higher                     | 10                               | \$200  | \$450  |
| Steam Trap Replacement  | 25                               | \$25   | \$100  |
| Natural Gas Food Service Steam Cookers - 5 pan                            | 2                                | \$1,500  | \$1,950  |
| Natural Gas Food Service Steam Cookers - 6 pan                            | 2                                | \$1,500  | \$1,950  |
| Natural Gas Food Service Double Oven                                      | 2                                | \$2,000  | \$2,750  |
| Natural Gas Tank Storage Water Heater, 20-55 gal, EF rating .67 or higher | 10                               | \$100  | \$300  |
| Natural Gas Tankless Water Heater   | 10                               | \$200  | \$400  |
| Hot Water Measure Kit (1-shower head, 2-aerators, 10 ft pipe wrap)        | 3                                | \$0  | \$25   |
| Ceiling Insulation R18  | \$250                            | \$.02 per sf<br>x ΔR                             | \$.04 per sf<br>x ΔR                             |
| Wall Insulation, minimum rating or R20                                    | \$400                            | \$.035 per sf<br>x ΔR                            | \$.06 per sf<br>x ΔR                             |
| Ceiling Insulation R18 to R49 w/Audit                                     | \$500                            | \$.02 per sf<br>x ΔR                             | \$.04 per sf<br>x ΔR                             |
| Wall Insulation, R20-R49 w/Audit  | \$800                            | \$.035 per sf<br>x ΔR                            | \$.06 per sf<br>x ΔR                             |
| Air Sealing Measure w/Audit   | \$800                            | \$300 per 0.5<br>ACH reduction                   | \$500 per 0.5<br>ACH reduction                   |
| Hot Water Measure Kit w/Audit   | 2                                | \$0  | \$25   |
| Pre-Rinse Spray Valve (less than 1.5 GPM)                                 | 2                                | \$25   | \$175  |
| Natural Gas Large Vat Fryer   | 2                                | \$700  | \$1,200  |
| Natural Gas Boiler AFUE rated 90% or higher                               | 2                                | \$200  | \$450  |
| Furnace Tune-up   | 10                               | 25% of<br>Incremental<br>Cost                    | 75% of<br>Incremental<br>Cost                    |
| Boiler Tune-up  | 2                                | 25% of<br>Incremental<br>Cost                    | 75% of<br>Incremental<br>Cost                    |
| Custom Rebate   | 1                                | \$5/MCF  | \$8/MCF  |

DATE OF ISSUE December 3, 2018                      DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address



# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

## MISSOURI ENERGY EFFICIENT NATURAL GAS CO-DELIVERY PROGRAM

### **APPLICATION**

The Missouri Energy Efficient Natural Gas Co-Delivery Program is designed to deliver energy savings to customers receiving service under the Residential Service Rate, the General Service Rate, or a Transportation Service Rate that also receive electric service from Ameren Missouri. The program will be co-delivered through electric one or more energy efficiency programs offered by Ameren Missouri.

Incentives are being offered on a limited basis for all or a portion of the cost of Measures provided to Participants.

### **DEFINITIONS**

Administrator - Company will administer the Program through a contractor experienced in energy efficiency programs.

Measure - The replacement of less efficient natural gas equipment with high efficiency natural gas equipment and other high efficiency equipment and building shell measures.

Participant - A customer who is being served under either the Company's Residential Service, General Service, or Transportation Service natural gas rate class, is located in Missouri, and elects to either purchase or agrees to receive energy efficient gas saving equipment as described in Measures And Incentives. For purposes of receiving incentives under this Program, a Participant is defined as a person, firm, organization, association, corporation, landlord, contractor or other entity that implements Measure(s).

### **AVAILABILITY**

The Program is available to Ameren Missouri gas customers that also receive electric service from Ameren Missouri and may be offered through various channels such as direct install, direct mail, secondary education schools, community based organization, and market-rate and low-income multifamily properties.

### **PROGRAM DESCRIPTION**

The Company will partner with the Ameren Missouri electric utility and a program Administrator to implement this Program. The Administrator will provide the necessary services to effectively implement the Program. The Program incorporates various Program partners, products, incentive mechanisms and Program delivery strategies.

DATE OF ISSUE December 3, 2018 DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn President St. Louis, Missouri  
Name of Officer Title Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

**MISSOURI ENERGY EFFICIENT NATURAL GAS  
CO-DELIVERY PROGRAM (cont'd)**

**MEASURES AND INCENTIVES**

Energy Efficiency Measures are delivered through the Program at no cost to Participants and may include but are not limited to thermostats, low flow faucet aerators, low flow showerheads, pipe wrap, and furnace tune-ups. Eligible measures and incentive ranges can be found on the REBATE RANGE SHEET - RESIDENTIAL & LANDLORD MEASURES list in the Missouri Energy Efficient Natural Gas Equipment and Building Shell Measure Rebate Programs tariff.

**PROGRAM TERM**

The Program will conclude on December 31, 2022 or at the time new rates go into effect as a result of a general rate proceeding, whichever occurs first. All installations of Measures or delivery of Measures for self-install must occur before the conclusion date of the Program.

DATE OF ISSUE December 3, 2018                      DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

## MISSOURI ENERGY EFFICIENT NATURAL GAS RESIDENTIAL LOW INCOME PROGRAM

### **APPLICATION**

The Missouri Energy Efficient Natural Gas Residential Single Family Low Income Program is designed to deliver energy savings to customers receiving service under the Residential Service Rate who meet income qualifications specified in the Availability section of this tariff.

Incentives are being offered on a limited basis for all or a portion of the cost of Measures provided to Participants.

### **DEFINITIONS**

Administrator - Company will administer the Program through a contractor experienced in energy efficiency programs.

Measure - The replacement of less efficient natural gas equipment with high efficiency natural gas equipment and other high efficiency equipment and building shell measures.

Participant - A customer who is being served under the Company's Residential Service natural gas rate class, is located in Missouri, and elects to either purchase or agrees to receive energy efficient gas saving equipment as described in Measures And Incentives.

### **AVAILABILITY**

The Program is available to qualifying low-income customers receiving service under the Residential Service Rate residing in single family detached housing, duplexes, mobile homes (wood-frame bolted to steel chassis, designed to be transported) and owners and operators of any multi-family properties of three(3) or more dwelling units with eligible customers receiving service under the Residential Service Rate.

In order to qualify for participation, low-income Participants must meet one of the following income eligibility requirements:

1. Reside in federal, state, or local subsidized housing and fall within that program's income guidelines.
2. Reside in non-subsidized housing with proof of income levels at or below 80% of area median income (AMI).
3. Fall within a census tract that indicates at least 85% of customers are at or below 80% of AMI.

DATE OF ISSUE December 3, 2018                      DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

**MISSOURI ENERGY EFFICIENT NATURAL GAS  
RESIDENTIAL LOW INCOME PROGRAM (cont'd)**

**MEASURES AND INCENTIVES**

Measures to be installed in this Program are the same as the list of residential measures in the Missouri Energy Efficient Natural Gas Equipment and Building Shell Measure Rebate Program, however the incentives could be as high as 100% of the installed cost of the measure. No single premise can receive incentives more than \$3,500 in a thirty-six month period.

**PROGRAM TERM**

The Program will conclude on December 31, 2022 or at the time new rates go into effect as a result of a general rate proceeding, whichever occurs first. All installations of Measures or delivery of Measures for self-install must occur before the conclusion date of the Program.

DATE OF ISSUE December 3, 2018 DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn President St. Louis, Missouri  
Name of Officer Title Address

# **Natural Gas Technical Resource Manual**

## **Volume 1: Overview and User Guide**

### Natural Gas TRM – Volume 1: Overview and User Guide Revision Log

| <b>Revision</b> | <b>Date</b> | <b>Description</b>                             |
|-----------------|-------------|--|
| 1.0             | 12/01/2018  | Initial version filed for Commission approval. |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |
|                 |             |  |

## Table of Contents

|   |           |
|---|-----------|
| <b>1. Natural Gas TRM Development.....</b>                            | <b>4</b>  |
| 1.1.1 Building upon the foundation of the Missouri Statewide TRM..... | 4         |
| <b>2 Organizational Structure .....</b>                               | <b>4</b>  |
| 2.1 Overall Organization.....   | 4         |
| 2.2 Components of Natural Gas TRM Measure Characterizations.....      | 5         |
| 2.3 Program Delivery.....   | 6         |
| 2.3.1 Program Delivery Types .....                                    | 7         |
| <b>3 General Assumptions.....</b>                                     | <b>8</b>  |
| 3.1 Algorithms and Variables .....                                    | 8         |
| 3.1.1 Custom Value Use in Measure Implementation .....                | 8         |
| 3.1 Baseline Assumptions .....  | 9         |
| 3.2 Summer Peak Period Definition (kW) .....                          | 9         |
| 3.3 Weather Data for Weather-sensitive Measures.....                  | 9         |
| 3.4 Use of O&M Costs.....   | 10        |
| <b>4 Glossary .....</b>   | <b>12</b> |
| <b>Appendix A –Loadshapes in Natural Gas TRM .....</b>                | <b>15</b> |

# 1. Natural Gas TRM Development

## 1.1.1 Building upon the foundation of the Missouri Statewide TRM

In 2017, the Missouri Department of Economic Development - Division of Energy ("DE") led the development of a statewide Technical Reference Manual, funded by a US Department of Energy ("DOE") grant, facilitated through contract with Vermont Energy Investment Corporation ("VEIC"), and supported by 14 formal, cost-share partners, including Ameren Missouri, Kansas City Power & Light Company, Spire, Inc., Empire District Electric Company, Summit Natural Gas of Missouri, Inc., Missouri American Water Company, Missouri Public Utilities Alliance, Missouri Energy Initiative, Renew Missouri, Sierra Club, Natural Resources Defense Council, Department of Natural Resources, Office of Public Counsel, and Public Service Commission Staff. Although consensus could not be reached on all issues, the active support of these 14 partners led to significant agreement on many aspects of a statewide Technical Reference Manual. The statewide Technical Reference Manual was developed for use by investor-owned utilities and as an available resource for other independent utilities, program administrators, and evaluators. Due to the regulatory and legal roles of the Public Service Commission and the Office of Public Counsel, those two partners actively monitored the development of - but did not take a position on - the actual content of the statewide Technical Reference Manual, which was the foundation for this Natural Gas Technical Resource Manual ("TRM").

# 2 Organizational Structure

## 2.1 Overall Organization

For ease of use and update, the Natural Gas TRM is published in three volumes:

**Volume 1: Overview and User Guide (this Volume)**

**Volume 2: Commercial and Industrial Measures**

**Volume 3: Residential Measures**

Information within Volumes 2 and 3 of the Natural Gas TRM is organized in a way to help facilitate its access and use. The structure within these technical documents follows a two-level format, each of which becomes a major heading in the Table of Contents. These levels are designed to define and clarify what the measure is and where it is applied.

### Level 1: End-use Category

- This level of organization represents most of the major end-use categories for which an efficient alternative exists. The following table gives examples of the end-use categories likely to be found in the Natural Gas TRM.

**End-Use Categories in the Natural Gas TRM**

| Commercial and Industrial Market Sector | Residential Market Sector |
|---|---------------------------|
| Appliances                              | Appliances                |
| Food Service                            | Hot Water                 |
| Hot Water                               | HVAC                      |
| HVAC                                    | Shell                     |
| Shell                                   |                           |



## **Level 2: Measure and Technology**

Within a particular market, end use, and measure, the Natural Gas TRM is not further divided by implementation or delivery methodology. For example, the characterization of a showerhead installed through any residential pathway – upstream, direct install, efficiency kits, hard-to-reach populations, etc. – is provided in one residential measure document, with lookup tables for the appropriate distinctions in program delivery.

Intended to help answer the question “What technology defines the measure?” this organizational approach seeks to capture the common information about a measure regardless of implementation or delivery mechanism, and then provides within the measure those additional assumptions relevant to such program options. In addition, characterizations are also designed to be agnostic on which fuel the measure is designed to save – electricity or natural gas. By organizing the Natural Gas TRM this way, measures that save on both fuels are captured in one place and defined with formulas and variables that allow visibility into the various fuel savings values. As a result the intent is to create a categorization process for the Natural Gas TRM that is easier to use and to maintain.

Further, information presented for each measure is standardized and may reflect either default/deemed or customer-specific values. Many of the measures may require the user to select the appropriate input value from a list of inputs for a given parameter in the savings algorithm. Where the Natural Gas TRM asks the user to select the input, look-up tables of allowable values are provided. For example, a set of input parameters may depend on building type; while a range of values may be given for each parameter, only one value is appropriate for any specific building type. If no table of alternative inputs is provided for a particular parameter, then the single deemed value will be used, unless the measure has a custom allowable input. Section 2.3 below provides further information on measure characterization content.

## **2.2 Components of Natural Gas TRM Measure Characterizations**

Each measure characterization uses a standardized format that includes at least the following components.

### **DESCRIPTION**

Brief description of measure stating how it saves energy, the markets it serves and any limitations to its applicability.

### **DEFINITION OF EFFICIENT EQUIPMENT**

Clear definition of the criteria for the efficient equipment used to determine delta savings. Including any standards or ratings (if appropriate).

### **DEFINITION OF BASELINE EQUIPMENT**

Clear definition of the efficiency level of the baseline equipment used to determine delta savings including any standards or ratings if appropriate. If there is more than one definition of baseline equipment required for an individual measure – such as a measure that can be offered through “time of sale” or “early replacement” the measure will clearly identify this and state the criteria to be used to determine the delta savings in each case.

### **DEEMED LIFETIME OF EFFICIENT EQUIPMENT**

The expected duration in years (or hours) of the savings. If an early replacement measure, the assumed life of the existing unit is also provided.

### **DEEMED MEASURE COST**

For time of sale measures, incremental cost from baseline to efficient is provided. Installation costs should

only be included if there is a difference between each efficiency level. For Early Replacement the full equipment and install cost of the efficient installation is provided in addition to the full deferred hypothetical baseline replacement cost.

#### **LOADSHAPE**

The appropriate loadshape to apply to electric and/or gas savings is provided.

#### **COINCIDENCE FACTOR**

Coincidence factors represent the fraction of connected load expected to be coincident with a particular system peak period, on a diversified basis, and is based on the ratio of the system coincident peak to annual energy by end use. Coincidence factors are provided for summer peak periods. These are also referred to as "kW factors" in the deemed savings tables.

#### **CALCULATION OF ENERGY SAVINGS**

Algorithms are provided followed by list of assumptions with their definition.

If there are no input variables, there will be a finite number of output values. These will be identified and listed in a table. Algorithms may be included in any or all of the following:

- **Electric Energy Savings**

Electric energy savings characterizations are different depending on the measure.

- **Summer Coincident Peak Demand Savings**

Summer Coincident Peak Demand characterizations are different depending on the end-use category.

- **Natural Gas Savings**

Natural gas energy savings characterizations are different depending on the measure.

- **Water Impact Descriptions and Calculation**

Water Impact characterizations are different depending on the measure.

#### **DEEMED O&M COST ADJUSTMENT CALCULATION**

Only required if the operation and maintenance ("O&M") cost for the efficient case is different to the baseline.

## **2.3 Program Delivery**

The measure characterizations in the Natural Gas TRM are not grouped by program delivery type. As a result, the measure characterizations provided include information and assumptions to support savings calculations for the range of program delivery options commonly used for the measure. The organizational significance of this approach is that multiple baselines, incremental costs, O&M costs, measure lives, and in-service rates are included in the characterizations for measures that are delivered under two or more different program designs. Values appropriate for each given program delivery type are clearly specified in the algorithms or in look-up tables within the characterization.

Care has been taken to clearly define in the measure's description the types of program delivery that the measure characterization is designed to support. However, there are no universally accepted definitions for a particular program type, and the description of the program type(s) may differ by measure. Nevertheless, program delivery types can be generally defined according to the following table. These are the

abbreviations and definitions used in the measure descriptions in the Natural Gas TRM Volumes 2 and 3. When necessary, individual measure descriptions may further refine and clarify these definitions of program delivery type.

### 2.3.1 Program Delivery Types

| Program                                      | Attributes   |
|--|--|
| <p><b>TOS</b><br/>Time of Sale</p>           | <p><b>Definition:</b> A program in which the customer is incented to purchase or install higher efficiency equipment than if the program had not existed. This may include retail rebate (coupon) programs, upstream buy-down programs, online store programs, or contractor based programs as examples<br/> <b>Baseline</b> = Federal Standard, code or other (explained) baseline equipment<br/> <b>Efficient Case</b> = New, premium efficiency equipment above federal and state codes and standard industry practice<br/> <b>Example:</b> LED lamp rebate</p> |
| <p><b>NC</b><br/>New<br/>Construction</p>    | <p><b>Definition:</b> A program that intervenes during building design to support the use of more-efficient equipment and construction practices<br/> <b>Baseline</b> = Building code, Federal Standard or Baseline Study<br/> <b>Efficient Case</b> = The program’s level of building specification<br/> <b>Example:</b> Building shell and mechanical measures</p>   |
| <p><b>RF</b><br/>Retrofit</p>                | <p><b>Definition:</b> A program that upgrades existing equipment before the end of its useful life<br/> <b>Baseline</b> = Existing equipment or the existing condition of the building or equipment. A single baseline applies over the measure’s life<br/> <b>Efficient Case</b> = New, premium efficiency equipment above federal and state codes and standard industry practice<br/> <b>Example:</b> Air sealing and insulation</p>   |
| <p><b>EREP</b><br/>Early<br/>Replacement</p> | <p><b>Definition:</b> A program that replaces existing equipment before the end of its expected life<br/> <b>Baseline</b> = Dual; it begins as the existing equipment and shifts to new baseline equipment after the expected life of the existing equipment is over<br/> <b>Efficient Case</b> = New, premium efficiency equipment above federal and state codes and standard industry practice<br/> <b>Example:</b> Refrigerators, freezers</p>  |
| <p><b>ERET</b><br/>Early<br/>Retirement</p>  | <p><b>Definition:</b> A program that retires duplicative equipment before its expected life is over<br/> <b>Baseline</b> = The existing equipment, which is retired and not replaced<br/> <b>Efficient Case</b> = Zero because the unit is retired<br/> <b>Example:</b> Appliance recycling</p>  |
| <p><b>DI</b><br/>Direct Install</p>          | <p><b>Definition:</b> A program where measures are installed during a site visit<br/> <b>Baseline</b> = Existing equipment<br/> <b>Efficient Case</b> = New, premium efficiency equipment above federal and state codes and standard industry practice<br/> <b>Example:</b> Lighting and low-flow hot water measures</p>   |
| <p><b>KITS</b><br/>Efficiency<br/>Kits</p>   | <p><b>Definition:</b> A program where measures are provided free of charge to a customer in an Efficiency Kit<br/> <b>Baseline</b> = Existing equipment<br/> <b>Efficient Case</b> = New, premium efficiency equipment above federal and state codes and standard industry practice<br/> <b>Example:</b> Lighting and low-flow hot water measures</p>  |

## 3 General Assumptions

Sources that are cited within the Natural Gas TRM have been chosen based on two priorities, geography and age. Whenever possible, it has incorporated Missouri-specific information into each measure characterization.

When Missouri or region-specific evaluations or data were not available, best practice research and data from other jurisdictions was used. In every case, the most recent, well-designed, and best-supported studies have been used to support the Natural Gas TRM, and only if appropriate have conclusions been generalized for practical application to the Missouri programs.

The purpose of this TRM is generally to provide savings assumptions and algorithms for measures which save natural gas, although electricity savings assumptions and algorithms are also included for measures which also save electricity. A benefit of including electric savings is that it provides an opportunity to perform holistic cost effectiveness analysis for those measures that save both natural gas and electricity. In the event that the assumptions and algorithms for electric energy and demand savings are different in the current utility Missouri Energy Efficiency Investment Act ("MEEIA") TRMs, the assumptions and algorithms in the current MEEIA TRM should be used to calculate electric savings, and not the assumptions and algorithms in this TRM. To the extent possible, efforts will be made to synchronize electric savings with Commission-approved MEEIA TRMs.

### General Savings Assumptions

The Natural Gas TRM savings estimates are expected to serve as average, representative values, or ways to calculate savings based on program-specific information. All information is presented on a per-measure basis. In using the measure-specific information in the Natural Gas TRM, it is helpful to keep the following notes in mind.

- All estimates of energy (kWh or therms) and peak (kW) savings are for first-year savings, not lifetime savings.
- Unless otherwise noted, measure life is defined to be the life of an energy consuming measure, including its equipment life and measure persistence.
- Where deemed values for savings are provided, they represent the average energy (kWh or therms) or peak (kW) savings that could be expected from the average of all measures that might be installed in Missouri in the program year.
- In general, the baselines included in the Natural Gas TRM are intended to represent average conditions in Missouri. Some are based on data from the state, such as household consumption characteristics provided by the Energy Information Administration. Some are extrapolated from other areas, when Missouri data are not available.

### 3.1 Algorithms and Variables

Many of the measures in the Natural Gas TRM require the user to select the appropriate input value from a list of inputs for a given parameter in the savings algorithm. Where the Natural Gas TRM asks the user to select the input, look-up tables of allowable values are provided. For example, a set of input parameters may depend on building type; while a range of values may be given for each parameter, only one value is appropriate for any specific building type. If no table of alternative inputs is provided for a particular parameter, then the single deemed value will be used, unless the measure has a custom allowable input.

#### 3.1.1 Custom Value Use in Measure Implementation

This section defines the requirements for capturing Custom variables that can be used in place of defaults

for select assumptions within the prescriptive measures defined in this statewide TRM. This approach is to be used when a variable in a measure formula can be replaced by a verifiable and documented value that is not presented in this TRM. This approach assumes that the algorithms presented in the measure are used as stated and only allows changes to certain variable values and is not a replacement algorithm for the measure. A custom variable is when customer input is provided to define the number or the value is measured at the site. Custom values can also be supplied from product data of the measure installed and historical verifiable program data. In certain cases the custom data can be provided from a documented study or report that is applicable to the measure. Custom variables and potential sources are clearly defined in the specific measures where “Actual” or “Custom” is noted.

### 3.1 Baseline Assumptions

The concept and definition of the baseline is a key element of every measure characterization and is directly related to the program delivery type. Without a clear definition of the baseline, the savings algorithms cannot be adequately specified and subsequent evaluation efforts would be hampered. As a result, each measure has a detailed description (and in many cases, specification) of the specific baseline that should be used to calculate savings. Baselines in the Natural Gas TRM fall into one of the following categories, and are organized within each measure characterization by the program delivery type to which it applies.

1. **Building Code:** As defined by the minimum specifications required under applicable local codes or applicable federal standards.
2. **Existing Equipment:** As determined by the most representative (or average) example of equipment that is in the existing stock. Existing equipment baselines apply over the equipment’s remaining useful life.
3. **New Equipment:** As determined by the equipment that represents standard practice in the current market environment or what has been specified for individual measure use. New equipment baselines apply over the effective useful life of the measure.

### 3.2 Summer Peak Period Definition (kW)

Summer peak coincidence factors ("CF") can be found within each measure characterization.

### 3.3 Weather Data for Weather-sensitive Measures

Many measures are weather sensitive. The table below assigns each proxy cities to one of four climate zones and provides a fifth statewide average for when a location is “unknown” as well as two individual categories for the “heat-island affect” of both St. Louis and Kansas City.


**Default Weather Sites and Climate Zones:**

| State | City           | Station/Description    | Climate Zone    |
|-------|----------------|------------------------|-----------------|
| IA    | Fort Madison   | Fort-Madison           | NE              |
| NE    | Lincoln        | Lincoln-Muni-AP        | NW              |
| MO    | Cape Girardeau | Cape-Girardeau-Muni-AP | SE              |
| MO    | Kaiser         | Kaiser-Mem(AWOS)       | SW              |
| MO    | Knob Noster    | Whiteman-AFB           | Average/Unknown |
| MO    | St Louis       | St-Louis-Lambert-IAP   | City            |
| MO    | Kansas City    | Kansas-City-IAP        | City            |

The following graphic of Missouri State color-codes the counties by the four “climate zones” identified in the table above (NE/NW, SE/SW). Although, the State’s average “unknown” value and individual city

zones are not highlighted on this map given each zone has an associated heating and cooling degree-day, the result is that there are a total of 14 climate zones identified for use in the Natural Gas TRM.

**Default County Weather Zone Assignment:**

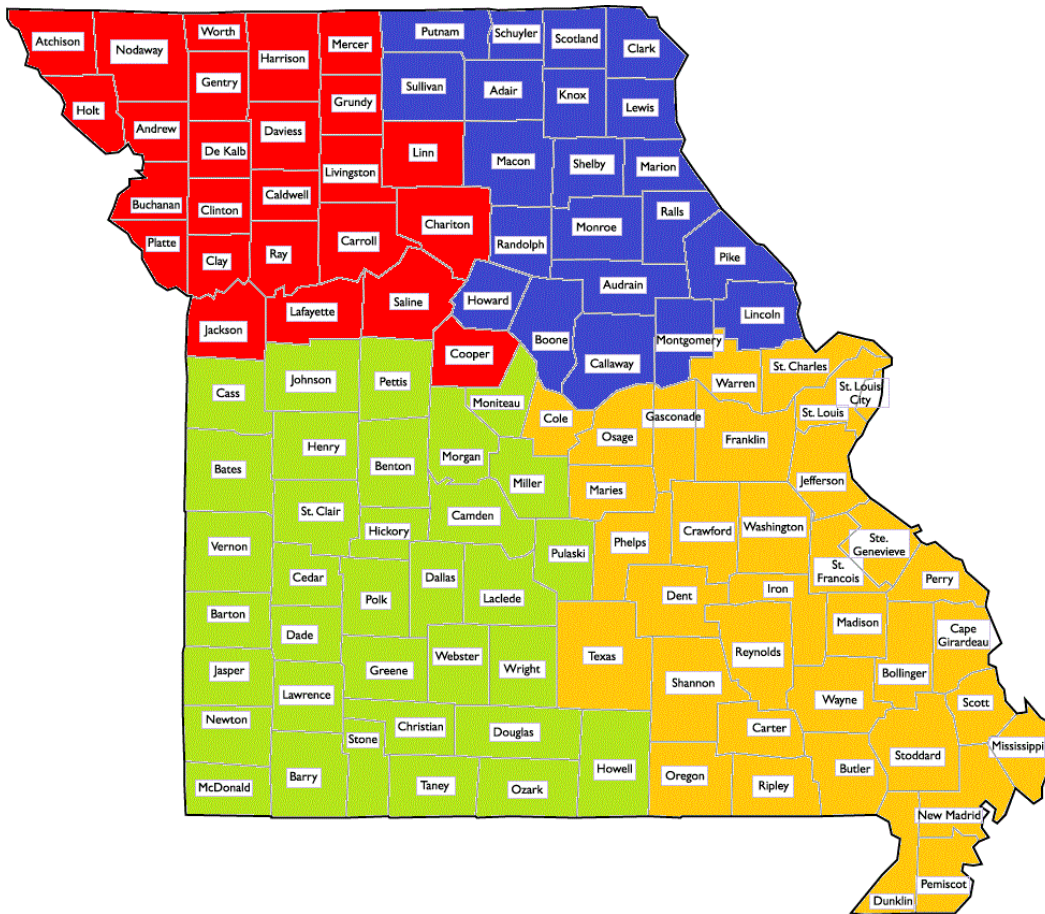

**3.4 Use of O&M Costs**

Some measures specify an operations and maintenance (O&M) parameter that describes the incremental O&M cost savings that can be expected over the measure’s lifetime. When estimating the cost effectiveness of these measures, it is necessary to calculate the net present value (NPV) of O&M costs over the life of the measure, which requires an appropriate discount rate. The utility’s weighted average cost of capital (WACC) is the most commonly used discount rate that is used in this context.

Each utility has a unique WACC that will vary over time. As a result, the Natural Gas TRM does not specify the NPV of the O&M costs. Instead, the necessary cost and time line information required to calculate the NPV is included. An example is provided below to demonstrate how to calculate the NPV of O&M costs.

**EXAMPLE**

Baseline Case: O&M costs equal \$150 every two years.

Efficient Case: O&M costs equal \$50 every five years.

Given this information, the incremental O&M costs can be determined by discounting these cash flows in the Baseline Case and the Efficient Case separately using the applicable WACC. Then the NPV of the incremental O&M costs is calculated by subtracting one NPV from the other. This value is used in each utility's cost-effectiveness screening process.

Effect of O&M costs for those measures that include baseline shifts that result in multiple component costs and lifetimes cannot be calculated by this standard method. In only these cases, the O&M costs are presented as Annual Levelized equivalent cost (i.e., the annual payment that results in an equivalent NPV to the actual stream of O&M costs) and utilities should apply their own real discount rate to determine NPVs.

## 4 Glossary

**Baseline Efficiency:** The assumed standard efficiency of equipment, absent an efficiency program.

**Building Types:** Sixteen C&I building prototypes were modeled using DOE/EnergyPlus for the Natural Gas TRM. The building types are based on the DOE Commercial Reference Buildings developed by DOE, NREL, PNNL, and LBNL. Detailed descriptions and variable calculations for each building prototype can be found on the Missouri Division of Energy TRM’s website. Note for C&I modeling efforts, TYM3 weather data is used as it is a designed input of energy modeling.

The following list provides a high level definition for each C&I building type offered in the Natural Gas TRM and follows DOE reference building documentation. For additional information about the prototype models and the associated inputs please refer to <https://energy.gov/eere/buildings/commercial-reference-buildings>.

| Building Type Name       | Floor Area (ft2) | Number of Floors | CBECS # | Weighting |
|--------------------------|------------------|------------------|---------|-----------|
| Large Office             | 498,588          | 12               | 1,251   | 0.5%      |
| Medium Office            | 53,628           | 3                | 12,394  | 5.3%      |
| Small Office             | 5,500            | 1                | 62,691  | 26.9%     |
| Warehouse                | 52,045           | 1                | 70,785  | 30.4%     |
| Stand-alone Retail       | 24,962           | 1                | 27,814  | 11.9%     |
| Strip Mall               | 22,500           | 1                | 2,538   | 1.1%      |
| Primary School           | 73,960           | 1                | 8,820   | 3.8%      |
| Secondary School         | 210,887          | 2                | 7,070   | 3.0%      |
| Supermarket              | 45,000           | 1                | 3,110   | 1.3%      |
| Quick Service Restaurant | 2,500            | 1                | 5,385   | 2.3%      |
| Full Service Restaurant  | 5,500            | 1                | 12,080  | 5.2%      |
| Hospital                 | 241,351          | 5                | 747     | 0.3%      |
| Outpatient Health Care   | 40,946           | 3                | 9,892   | 4.2%      |
| Small Hotel              | 43,200           | 4                | 8,051   | 3.5%      |
| Large Hotel              | 122,120          | 6                | 404     | 0.2%      |
| Midrise Apartment*       | 33,740           | 4                |         | 0.0%      |

*Note: To help determine the appropriate building type to use as a reference to a specific project, the user should take into consideration the predominant use type, size of the building/project, and the HVAC systems that serve the project. Where a project is defined by multiple uses or systems it may be appropriate to utilize floor area weighted averages of model outputs (e.g., EFLH) based on the distribution of those use types in the project under consideration. For example, if the user is defining EFLHs for a system or measure that impacts both retail and office spaces within a 75,000 ft<sup>2</sup>, 5-story building then they may consider an area-weighted average EFLH from Medium Office and Stand Alone Retail.*

**Coincidence Factor (CF):** Coincidence factors represent the fraction of connected load expected to be coincident with a particular system peak period, on a diversified basis, and is based on the ratio of the system coincident peak to annual energy by end use. CFs are provided for summer peak periods. These are also referred to as "kW factors" in the deemed savings tables.

**Commercial & Industrial:** The market sector that includes measures that apply to any of the building



types defined in the Natural Gas TRM, which includes multifamily common areas and public housing<sup>1</sup>.

**Connected Load:** The maximum wattage of the equipment, under normal operating conditions.

**Deemed Value:** A value that has been assumed to be representative of the average condition of an input parameter.

**Default Value:** When a measure indicates that an input to a prescriptive saving algorithm may take on a range of values, an average value is also provided in many cases. This value is considered the default input to the algorithm, and should be used when the other alternatives listed in the measure are not applicable.

**End-use Category:** A general term used to describe the categories of equipment that provide a service to an individual or building. See Section 2, Level 1: End-use Category Table for a list of the end use categories that are incorporated in the Natural Gas TRM.

**Energy Efficiency:** "Energy efficiency" means measures that reduce the amount of electricity or natural gas required to achieve a given end use. "Energy efficiency" also includes measures that reduce the total Btus of electricity and natural gas needed to meet the end use or uses.

**Equivalent Full Load Hours (EFLH):** The equivalent hours that equipment would need to operate at its peak capacity in order to consume its estimated annual kWh consumption (annual kWh/connected kW) or therms.

**Evaluation:** (synonym EM&V) in the energy efficiency arena, impact evaluation is an investigation process to determine energy or demand impacts achieved through the program activities, including but not limited to savings verification, measure research and program research.

**High Efficiency:** General term for technologies and processes that require less energy, water, or other inputs to operate.

**Incremental Costs:** This is a calculated difference in equipment or technology cost between a base equipment model and the more efficient model. Incremental costs can be as little as \$0, indicating that there is no expected cost difference between baseline and efficient technologies. Cost of labor or other installation related costs is not considered in incremental costs.

**Lifetime:** The number of years (or hours) that the new high efficiency equipment is expected to function. These are generally based on engineering lives, but sometimes adjusted based on expectations about frequency of removal, remodeling or demolition. Two important distinctions fall under this definition; Effective Useful Life (EUL) and Remaining Useful Life (RUL).

**EUL** – EUL is based on the manufacturers rating of the effective useful life; how long the equipment will last. It is an estimate of the median number of years that the measures installed under a program are still in place and operable.

**RUL** – Applies to retrofit or replacement measures. For example, if an existing working refrigerator is replaced with a high efficiency unit, the RUL is an assumption of how many more years the existing unit would have lasted. As a general rule the RUL is usually assumed to be 1/3 of the EUL.

**Load Factor (LF):** The fraction of full load (wattage) for which the equipment is typically run.

**Measure Cost:** The incremental (for time of sale measures) or full cost (both capital and labor for retrofit measures) of implementing the High Efficiency equipment.

**Measure Description:** A detailed description of the technology and the criteria it must meet to be eligible as an energy efficient measure.

---

<sup>1</sup> Measures that apply to the multifamily and public housing building types describe how to handle tenant versus master metered buildings.

**Measure:** An efficient technology or procedure that results in energy savings as compared to the baseline efficiency. There are three main measure types:

- 1) **Prescriptive Measures** - measures or technologies are offered through a standard (in contrast to custom) program, for which partially or fully deemed input values are applicable:
  - i. **Fully deemed measures** - measures whose energy savings are expressed on a per unit basis in the Natural Gas TRM and are not subject to change or choice by the program administrator.
  - ii. **Partially deemed measures** - measures whose energy savings algorithms are deemed in the Natural Gas TRM, with input values that may be selected to some degree by the program administrator, typically based on a customer-specific input.
- 2) **Custom Measures** – these are measures or technologies that due to the complexity in the design and configuration of the particular measure in the energy efficiency project, a more comprehensive custom engineering algorithm and financial analysis may be used that more accurately characterize the energy efficiency savings within a project.
- 3) **Comparison group EM&V measures** – these are measures that determine program savings based on the differences in electricity consumption patterns between a comparison group the program participants, not a deemed savings value. Comparison group approaches include randomized control trials (RCTs) and quasi-experimental methods using nonparticipants, and may involve simple differences or regression methods. Because the effects of implemented measures is reflected in the observed participant-comparison differences, separate verification is not required. These methods are generally used for planning purposes to estimate program-level savings, not facility- or project-level savings, and are therefore considered an evaluation method. *Note: The reference to and inclusion of Residential Peer Comparison Behavior Programs in the Natural Gas TRM is an example of where comparison group EM&V values should be used to support program considerations, rather than deemed, alongside robust reference documentation for the sources of those values and the appropriate use of SEEACTION<sup>2</sup> and UMP guidelines<sup>3</sup> as required for program evaluation/savings calculation.*

**Measure research:** an evaluation process focused on providing better/more granular data to facilitate updating measure-specific Natural Gas TRM input values or algorithms.

**Residential:** The market sector that includes measures that apply only to detached, residential buildings, duplexes and applicable multifamily units.

**Operation and Maintenance (O&M) Cost Adjustments:** The dollar impact resulting from differences between baseline and efficient case Operation and Maintenance costs.

**Operating Hours (HOURS):** The annual hours that equipment is expected to operate.

**Program:** The mode of delivering a particular measure or set of measures to customers. See Section 2.4.1 for a list of program descriptions that are presently operating in Missouri.

**Program research:** an evaluation process that takes an alternative look into achieved program level savings across multiple measures. May or may not be specific enough to inform future Natural Gas TRM updates. Ex. Program billing analysis.

**Savings verification:** an evaluation process that independently verifies program savings achieved through prescriptive measures.

---

2 Evaluation, Measurement, and Verification (EM&V) of Residential Behavior-Based Energy Efficiency Programs: Issues and Recommendations; SEEACTION (State and Local Energy Efficiency Action Network- EPA/DOE), 2012

3 The Uniform Methods Project: Methods for Determining Energy Efficiency Savings for Specific Measures; Residential Behavior Protocol, NREL/DOE, 2015.

## Appendix A –Loadshapes in Natural Gas TRM

Table 1 – Residential End-Use Category Electric Monthly Shapes and Coincident Peak Factors

**End-Use Energy Load Shapes**

**% Energy by Month**

| Month     | Residential End-Use Load Shape |             |             |             |          |              |                   |              |                   |                   |
|-----------|--------------------------------|-------------|-------------|-------------|----------|--------------|-------------------|--------------|-------------------|-------------------|
|           | Building Shell RES             | Cooling RES | Freezer RES | Heating RES | HVAC RES | Lighting RES | Miscellaneous RES | Pool Spa RES | Refrigeration RES | Water Heating RES |
| January   | 11.1297%                       | 0.1200%     | 7.9579%     | 21.7905%    | 11.1297% | 10.1182%     | 8.4893%           | 8.6451%      | 7.7053%           | 10.3527%          |
| February  | 9.3077%                        | 0.1100%     | 7.2518%     | 18.2135%    | 9.3077%  | 8.8441%      | 7.7366%           | 7.1145%      | 7.2169%           | 9.0720%           |
| March     | 7.0042%                        | 0.3130%     | 8.1080%     | 13.4833%    | 7.0042%  | 9.2879%      | 8.4863%           | 8.6052%      | 8.0272%           | 9.5543%           |
| April     | 3.7116%                        | 1.5047%     | 7.9918%     | 5.8486%     | 3.7116%  | 8.4645%      | 8.2144%           | 8.0702%      | 7.8752%           | 8.4799%           |
| May       | 4.0888%                        | 6.5410%     | 8.4083%     | 1.7144%     | 4.0888%  | 7.9393%      | 8.4847%           | 8.6052%      | 8.5646%           | 8.3600%           |
| June      | 10.3973%                       | 21.0823%    | 8.5730%     | 0.0510%     | 10.3973% | 6.8508%      | 8.2122%           | 8.0702%      | 8.9112%           | 7.7065%           |
| July      | 14.0100%                       | 28.4780%    | 9.6095%     | 0.0006%     | 14.0100% | 6.7864%      | 8.4883%           | 8.6451%      | 9.4239%           | 6.7712%           |
| August    | 13.3207%                       | 27.0766%    | 9.6095%     | 0.0009%     | 13.3207% | 7.0565%      | 8.4840%           | 8.5653%      | 9.4212%           | 6.3688%           |
| September | 6.6759%                        | 12.6605%    | 8.4277%     | 0.8809%     | 6.6759%  | 7.3792%      | 8.2136%           | 8.3032%      | 8.4971%           | 6.9373%           |
| October   | 3.7011%                        | 1.8472%     | 8.2582%     | 5.4962%     | 3.7011%  | 8.4539%      | 8.4869%           | 8.6052%      | 8.5653%           | 7.9644%           |
| November  | 5.9593%                        | 0.1444%     | 7.8465%     | 11.5899%    | 5.9593%  | 8.9880%      | 8.2122%           | 8.1088%      | 7.8717%           | 8.4752%           |
| December  | 10.6937%                       | 0.1222%     | 7.9579%     | 20.9301%    | 10.6937% | 9.8312%      | 8.4915%           | 8.6619%      | 7.9204%           | 9.9577%           |

**End-Use Energy to Coincident Peak Demand Factors**

|  | Building Shell RES | Cooling RES  | Freezer RES  | Heating RES  | HVAC RES     | Lighting RES | Miscellaneous RES | Pool Spa RES | Refrigeration RES | Water Heating RES |
|--|--------------------|--------------|--------------|--------------|--------------|--------------|-------------------|--------------|-------------------|-------------------|
|  | 0.0004660805       | 0.0009474181 | 0.0001685722 | 0.0000000000 | 0.0004660805 | 0.0001492529 | 0.0001148238      | 0.0002354459 | 0.0001285253      | 0.0000887318      |

Table 2 – Commercial and Industrial End-Use Category Electric Monthly Shapes and Coincident Peak Factors

| End-Use Energy Load Shapes                       |                    |              |              |                  |              |              |              |                   |              |              |                   |                   |
|--|--------------------|--------------|--------------|------------------|--------------|--------------|--------------|-------------------|--------------|--------------|-------------------|-------------------|
| % Energy by Month                                |                    |              |              |                  |              |              |              |                   |              |              |                   |                   |
| Business End-Use Load Shape                      |                    |              |              |                  |              |              |              |                   |              |              |                   |                   |
| Air Comp BUS                                     | Building Shell BUS | Cooking BUS  | Cooling BUS  | Ext Lighting BUS | Heating BUS  | HVAC BUS     | Lighting BUS | Miscellaneous BUS | Motors BUS   | Process BUS  | Refrigeration BUS | Water Heating BUS |
| 8.5109%  | 10.7824%           | 8.6096%      | 0.0006%      | 10.6265%         | 21.0397%     | 10.7824%     | 9.3564%      | 8.5109%           | 8.5109%      | 8.5109%      | 8.3486%           | 10.8255%          |
| 7.7715%  | 9.1052%            | 7.8609%      | 0.0247%      | 8.2162%          | 17.7436%     | 9.1052%      | 7.2162%      | 7.7715%           | 7.7715%      | 7.7715%      | 7.6158%           | 9.1078%           |
| 8.6136%  | 7.1135%            | 8.1548%      | 0.7236%      | 7.0887%          | 13.1924%     | 7.1135%      | 7.8373%      | 8.6136%           | 8.6136%      | 8.6136%      | 8.3346%           | 8.5240%           |
| 7.9796%  | 4.1179%            | 7.2948%      | 2.1691%      | 6.8146%          | 5.9718%      | 4.1179%      | 7.6534%      | 7.9796%           | 7.9796%      | 7.9796%      | 8.0783%           | 7.2980%           |
| 8.5335%  | 4.4424%            | 8.6277%      | 6.2980%      | 8.1853%          | 2.6769%      | 4.4424%      | 9.4247%      | 8.5335%           | 8.5335%      | 8.5335%      | 8.5133%           | 7.9849%           |
| 8.1995%  | 10.6128%           | 8.3294%      | 21.3170%     | 6.7163%          | 0.4295%      | 10.6128%     | 7.5599%      | 8.1995%           | 8.1995%      | 8.1995%      | 8.4295%           | 7.2721%           |
| 8.4099%  | 14.2881%           | 8.5859%      | 29.0029%     | 8.6752%          | 0.2895%      | 14.2881%     | 9.6200%      | 8.4099%           | 8.4099%      | 8.4099%      | 8.7457%           | 7.4930%           |
| 8.4199%  | 13.3494%           | 8.5885%      | 27.0206%     | 6.9401%          | 0.3432%      | 13.3494%     | 7.7078%      | 8.4199%           | 8.4199%      | 8.4199%      | 8.7230%           | 7.5862%           |
| 8.2512%  | 5.7810%            | 8.3475%      | 10.8695%     | 8.2908%          | 0.9402%      | 5.7810%      | 8.1374%      | 8.2512%           | 8.2512%      | 8.2512%      | 8.3319%           | 7.5734%           |
| 8.5277%  | 3.8018%            | 8.6262%      | 1.9643%      | 10.0507%         | 5.5497%      | 3.8018%      | 9.4072%      | 8.5277%           | 8.5277%      | 8.5277%      | 8.4563%           | 8.2808%           |
| 8.2589%  | 6.2104%            | 8.3496%      | 0.6030%      | 8.7252%          | 11.5452%     | 6.2104%      | 7.6707%      | 8.2589%           | 8.2589%      | 8.2589%      | 8.1112%           | 8.6345%           |
| 8.5238%  | 10.3950%           | 8.6251%      | 0.0064%      | 9.6704%          | 20.2781%     | 10.3950%     | 8.4090%      | 8.5238%           | 8.5238%      | 8.5238%      | 8.3119%           | 9.4200%           |
| End-Use Energy to Coincident Peak Demand Factors |                    |              |              |                  |              |              |              |                   |              |              |                   |                   |
| Air Comp BUS                                     | Building Shell BUS | Cooking BUS  | Cooling BUS  | Ext Lighting BUS | Heating BUS  | HVAC BUS     | Lighting BUS | Miscellaneous BUS | Motors BUS   | Process BUS  | Refrigeration BUS | Water Heating BUS |
| 0.0001379439                                     | 0.0004439830       | 0.0001998949 | 0.0009106840 | 0.0000056160     | 0.0000000000 | 0.0004439830 | 0.0001899635 | 0.0001379439      | 0.0001379439 | 0.0001379439 | 0.0001357383      | 0.0001811545      |

Table 3 – End-Use Category Natural Gas Monthly Shapes

| <b>End-Use Category Energy Load Shapes</b> |                    |               |               |                 |               |               |
|--|--------------------|---------------|---------------|-----------------|---------------|---------------|
|  | <b>Residential</b> |               |               | <b>Business</b> |               |               |
| <b>Month</b>                               | Heating            | Water Heating | Miscellaneous | Heating         | Water Heating | Miscellaneous |
| January                                    | 21.7905%           | 10.3527%      | 8.4893%       | 21.0397%        | 10.8255%      | 8.5109%       |
| February                                   | 18.2135%           | 9.0720%       | 7.7366%       | 17.7436%        | 9.1078%       | 7.7715%       |
| March                                      | 13.4833%           | 9.5543%       | 8.4863%       | 13.1924%        | 8.5240%       | 8.6136%       |
| April                                      | 5.8486%            | 8.4799%       | 8.2144%       | 5.9718%         | 7.2980%       | 7.9796%       |
| May  | 1.7144%            | 8.3600%       | 8.4847%       | 2.6769%         | 7.9849%       | 8.5335%       |
| June                                       | 0.0510%            | 7.7065%       | 8.2122%       | 0.4295%         | 7.2721%       | 8.1995%       |
| July                                       | 0.0006%            | 6.7712%       | 8.4883%       | 0.2895%         | 7.4930%       | 8.4099%       |
| August                                     | 0.0009%            | 6.3688%       | 8.4840%       | 0.3432%         | 7.5862%       | 8.4199%       |
| September                                  | 0.8809%            | 6.9373%       | 8.2136%       | 0.9402%         | 7.5734%       | 8.2512%       |
| October                                    | 5.4962%            | 7.9644%       | 8.4869%       | 5.5497%         | 8.2808%       | 8.5277%       |
| November                                   | 11.5899%           | 8.4752%       | 8.2122%       | 11.5452%        | 8.6345%       | 8.2589%       |
| December                                   | 20.9301%           | 9.9577%       | 8.4915%       | 20.2781%        | 9.4200%       | 8.5238%       |

# **Natural Gas Technical Resource Manual**

## **Volume 2: Commercial and Industrial Gas Measures**

### Natural Gas TRM – Volume 2: C&I Measures Revision Log

| Revision | Date       | Description                                    |
|----------|------------|--|
| 1.0      | 12/01/2018 | Initial version filed for Commission approval. |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |
|          |            |  |

|  |            |
|--|------------|
| <b>Volume 2: Commercial and Industrial Measures .....</b>                    | <b>5</b>   |
| <b>2.1 Appliances End Use .....</b>  | <b>5</b>   |
| 2.1.1 Clothes Washer .....   | 5          |
| 2.1.2 Clothes Dryer .....  | 10         |
| <b>2.2 Food Service End Use .....</b>  | <b>15</b>  |
| 2.2.1 Combination Oven .....   | 15         |
| 2.2.2 Commercial Steam Cooker .....  | 21         |
| 2.2.3 Conveyor Oven .....  | 26         |
| 2.2.4 Fryer .....  | 29         |
| 2.2.5 Convection Oven .....  | 33         |
| 2.2.6 Griddle .....  | 37         |
| 2.2.7 Infrared Charbroiler .....   | 41         |
| 2.2.8 Infrared Rotisserie Oven .....   | 43         |
| 2.2.9 Kitchen Demand Ventilation Controls.....                               | 45         |
| 2.2.10 Rack Oven.....  | 48         |
| 2.2.11 Infrared Salamander Broiler.....                                      | 51         |
| 2.2.12 Pre-Rinse Spray Valve.....  | 53         |
| <b>2.3 Hot Water End Use.....</b>  | <b>56</b>  |
| 2.3.1 Water Heater .....   | 56         |
| 2.3.2 Low Flow Faucet Aerator .....  | 61         |
| 2.3.3 Circulator Pump .....  | 66         |
| <b>2.4 HVAC End Use .....</b>  | <b>68</b>  |
| 2.4.1 Boiler.....  | 69         |
| 2.4.2 Boiler Averaging Controls .....  | 72         |
| 2.4.3 Boiler Lockout/Reset Controls.....                                     | 74         |
| 2.4.4 High Temperature Heating & Ventilating (HTHV) Direct Fired Heater..... | 76         |
| 2.4.5 High Turndown Burner for Spacing Heating Boilers .....                 | 78         |
| 2.4.6 Infrared Heaters .....   | 80         |
| 2.4.7 Small Commercial Learning Thermostats .....                            | 82         |
| 2.4.8 Small Commercial Programmable Thermostats .....                        | 85         |
| 2.4.9 Steam Trap Replacement or Repair .....                                 | 88         |
| 2.4.10 Demand Controlled Ventilation .....                                   | 91         |
| 2.4.11 Furnace.....  | 95         |
| 2.4.12 Boiler/Furnace Tune-up .....  | 97         |
| <b>2.5 Shell End Use.....</b>  | <b>100</b> |
| 2.5.1 Air Sealing .....  | 100        |
| 2.5.2 Windows .....  | 104        |



2.5.3 Ceiling and Wall Insulation ..... 109

## Volume 2: Commercial and Industrial Measures

### 2.1 Appliances End Use

#### 2.1.1 Clothes Washer

##### DESCRIPTION

This measure relates to the installation of a commercial grade clothes washer meeting the ENERGY STAR® minimum qualifications. Note it is assumed the DHW and dryer fuels of the installations are known.

This measure was developed to be applicable to the following program types: TOS, NC.

If applied to other program types, the measure savings should be verified.

##### DEFINITION OF EFFICIENT EQUIPMENT

The Commercial grade Clothes washer must meet the ENERGY STAR® minimum qualifications (provided in the table below), as required by the program.

##### DEFINITION OF BASELINE EQUIPMENT

The baseline condition is a commercial grade clothes washer meeting the minimum federal baseline as of January 2013.<sup>1</sup>

| Efficiency Level |                  | Top loading                   | Front Loading                  |
|------------------|------------------|-------------------------------|--------------------------------|
| Baseline         | Federal Standard | $\geq 1.6$ MEF, $\leq 8.5$ WF | $\geq 2.00$ MEF, $\leq 5.5$ WF |
| Efficient        | ENERGY STAR®     | $\geq 2.2$ MEF, $\leq 4.5$ WF |                                |

The Modified Energy Factor (MEF) includes unit operation, water heating, and drying energy use, with the higher the value the more efficient the unit; *"The quotient of the capacity of the clothes container, divided by the total clothes washer energy consumption per cycle, with such energy consumption expressed as the sum of the machine electrical energy consumption, the hot water energy consumption, and the energy required for removal of the remaining moisture in the wash load."*

The Water Factor (WF) indicates the total water consumption of the unit, with the lower the value the less water required; *"The quotient of the total weighted per-cycle water consumption for cold wash, divided by the capacity of the clothes washer."*<sup>2</sup>

##### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 11 years.<sup>3</sup>

##### DEEMED MEASURE COST

The incremental cost is assumed to be \$200<sup>4</sup>:

<sup>1</sup> See Federal Standard 10 CFR 431.152.

<sup>2</sup> Definitions provided on the ENERGY STAR® website.

<sup>3</sup> Appliance Magazine, September 2007 as referenced in ENERGY STAR® Commercial Clothes Washer Calculator.

<sup>4</sup> Based on Industry Data 2007 as referenced in ENERGY STAR® Commercial Clothes Washer Calculator.

**LOADSHAPE**

Loadshape – Miscellaneous BUS

---



---

**Algorithm**

---



---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh = \left[ \left( Capacity * \frac{1}{MEF_{base}} * Ncycles \right) * \left( \%CW_{base} + (\%DHW_{base} * \%Electric_{DHW}) + (\%Dryer_{base} * \%Electric_{Dryer}) \right) \right] - \left[ \left( Capacity * \frac{1}{IMEF_{eff}} * Ncycles \right) * \left( \%CW_{eff} + (\%DHW_{eff} * \%Electric_{DHW}) + (\%Dryer_{eff} * \%Electric_{Dryer}) \right) \right]$$

Where:

- Capacity = Clothes Washer capacity (cubic feet)  
= Actual - If capacity is unknown, assume 3.1 cubic feet<sup>5</sup>
- MEFbase = Modified Energy Factor of baseline unit

| Efficiency Level | MEFbase     |               |                               |
|------------------|-------------|---------------|-------------------------------|
|                  | Top loading | Front Loading | Weighted Average <sup>6</sup> |
| Federal Standard | 1.6         | 2.0           | 1.7                           |

- MEFeff = Modified Energy Factor of efficient unit  
= Actual. If unknown, assume average values provided below.

| Efficiency Level | MEFeff      |               |                  |
|------------------|-------------|---------------|------------------|
|                  | Top loading | Front Loading | Weighted Average |
| ENERGY STAR®     | 2.2         |               |                  |

- Ncycles = Number of Cycles per year  
= 2190<sup>7</sup>

<sup>5</sup> Based on the average clothes washer volume of all units that pass the Federal Standard on the CEC database of commercial Clothes Washer products (accessed on 11/26/2015).

<sup>6</sup> Weighted average MEF of Federal Standard rating for Front Loading and Top Loading units. Baseline weighting is based upon the relative top front loading percentage of available non-ENERGY STAR® commercial products in the CEC database (accessed 11/26/2015) and ENERGY STAR® weighting is based on eligible products as of 11/26/2015. The relative weightings are as follows, see more information in “Commercial Clothes Washer Analysis.xlsx”:

| Efficiency Level | Front | Top |
|------------------|-------|-----|
| Baseline         | 37%   | 63% |
| ENERGY STAR®     | 99%   | 1%  |

<sup>7</sup> Based on DOE Technical Support Document, 2009; Chapter 8 Life-Cycle Cost and Payback Period Analysis, p 8-15.

%CW = Percentage of total energy consumption for Clothes Washer operation (different for baseline and efficient unit – see table below)

%DHW = Percentage of total energy consumption used for water heating (different for baseline and efficient unit – see table below)

%Dryer = Percentage of total energy consumption for dryer operation (different for baseline and efficient unit – see table below)

|                  | Percentage of Total Energy Consumption <sup>8</sup> |       |        |
|------------------|---|-------|--------|
|                  | %CW   | %DHW  | %Dryer |
| Federal Standard | 6.5%  | 25.9% | 67.6%  |
| ENERGY STAR®     | 3.5%  | 14.1% | 82.4%  |

%Electric<sub>DHW</sub> = Percentage of DHW savings assumed to be electric

| DHW fuel    | %Electric <sub>DHW</sub> |
|-------------|--------------------------|
| Electric    | 100%                     |
| Natural Gas | 0%                       |

%Electric<sub>Dryer</sub> = Percentage of dryer savings assumed to be electric

| Dryer fuel  | %Electric <sub>Dryer</sub> |
|-------------|----------------------------|
| Electric    | 100%                       |
| Natural Gas | 0%                         |

Using the default assumptions provided above, the prescriptive savings for each configuration are presented below<sup>9</sup>:

| Efficiency Level | ΔkWh                           |                           |                           |                      |
|------------------|--------------------------------|---------------------------|---------------------------|----------------------|
|                  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®     | 808.2                          | 229.3                     | 725.3                     | 146.5                |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

ΔkWh = Energy Savings as calculated above

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor

<sup>8</sup> The percentage of total energy consumption that is used for the machine, heating the hot water, or by the dryer is different depending on the efficiency of the unit. Values are based on a data provided in the ENERGY STAR® Calculator for Commercial Clothes Washers.

<sup>9</sup> Note that the baseline savings is based on the weighted average baseline MEF (as opposed to assuming Front baseline for Front efficient unit and Top baseline for Top efficient unit). The reasoning is that the support of the program of more efficient units (which are predominately front loading) will result in some participants switching from planned purchase of a top loader to a front loader.

$$= 0.0001379439^{10}$$

Using the default assumptions provided above, the prescriptive savings for each configuration are presented below:

| Efficiency Level | ΔkW                            |                           |                           |                      |
|------------------|--------------------------------|---------------------------|---------------------------|----------------------|
|                  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®     | 0.1115                         | 0.0316                    | 0.1001                    | 0.0202               |

**NATURAL GAS SAVINGS**

$$\Delta Therms = \left[ \left[ \left( Capacity * \frac{1}{IMEF_{base}} * Ncycles \right) * \left( (\%DHW_{base} * \%Natural\ Gas_{DHW} * R_{eff}) + (\%Dryer_{base} * \%Gas_{Dryer} \%Gas_{Dryer}) \right) \right] - \left[ \left( Capacity * \frac{1}{IMEF_{eff}} * Ncycles \right) * \left( (\%DHW_{eff} * \%Gas_{DHW} \%Natural\ Gas_{DHW} * R_{eff}) + (\%Dryer_{eff} * \%Gas_{Dryer} \%Gas_{Dryer}) \right) \right] \right] * Therm_{convert}$$

Where:

%Gas<sub>DHW</sub> = Percentage of DHW savings assumed to be Natural Gas

| DHW fuel    | %Gas <sub>DHW</sub> |
|-------------|---------------------|
| Electric    | 0%                  |
| Natural Gas | 100%                |

R<sub>eff</sub> = Recovery efficiency factor  
= 1.26<sup>11</sup>

%Gas<sub>Dryer</sub> = Percentage of dryer savings assumed to be Natural Gas

| Dryer fuel  | %Gas <sub>Dryer</sub> |
|-------------|-----------------------|
| Electric    | 0%                    |
| Natural Gas | 100%                  |

Therm<sub>convert</sub> = Conversion factor from kWh to Therm  
= 0.03412

Other factors as defined above.

Using the default assumptions provided above, the prescriptive savings for each configuration are presented below:

<sup>10</sup> Based on Ameren Missouri 2016 Loadshape for Business Miscellaneous End-Use. Upon inspection and comparison to the Residential clothes washer coincidence factor, this is a reasonable assumption until data becomes available to inform a technology specific coincidence factor. Given that business laundry schedules are likely more variable compared to residential, it follows that less overlap with the system peak hour is possible.

<sup>11</sup> To account for the different efficiency of electric and Natural Gas hot water heaters (gas water heater: recovery efficiencies ranging from 0.74 to 0.85 (0.78 used), and electric water heater with 0.98 recovery efficiency ([http://www.energystar.gov/ia/partners/bldrs\\_lenders\\_raters/downloads/Waste\\_Water\\_Heat\\_Recovery\\_Guidelines.pdf](http://www.energystar.gov/ia/partners/bldrs_lenders_raters/downloads/Waste_Water_Heat_Recovery_Guidelines.pdf))). Therefore a factor of 0.98/0.78 (1.26) is applied.

| Efficiency Level | ΔTherms                        |                           |                           |                      |
|------------------|--------------------------------|---------------------------|---------------------------|----------------------|
|                  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®     | 0.0                            | 24.9                      | 2.8                       | 27.7                 |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

$$\Delta Water \text{ (gallons)} = Capacity * (IWFbase - IWFeff) * Ncycles$$

Where:

WFbase = Water Factor of baseline clothes washer

| Efficiency Level | WFbase      |               |                                |
|------------------|-------------|---------------|--------------------------------|
|                  | Top loading | Front Loading | Weighted Average <sup>12</sup> |
| Federal Standard | 8.5         | 5.5           | 7.4                            |

WFeff = Water Factor of efficient clothes washer  
 = Actual - If unknown assume average values provided below

Using the default assumptions provided above, the prescriptive water savings for each efficiency level are presented below:

| Efficiency Level | WF          |               |                  | ΔWater<br>(gallons per year) |
|------------------|-------------|---------------|------------------|------------------------------|
|                  | Top Loaders | Front Loaders | Weighted Average | Weighted Average             |
| Federal Standard | 8.5         | 5.5           | 7.4              | n/a                          |
| ENERGY STAR®     | 4.5         |               |                  | 19,874                       |

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

<sup>12</sup> Weighted average MEF of Federal Standard rating for Front Loading and Top Loading units. Baseline weighting is based upon the relative top v front loading percentage of available non-ENERGY STAR® commercial product in the CEC database (accessed 11/26/2015) and ENERGY STAR® weighting is based on eligible products as of 11/26/2015. The relative weightings are as follows, see more information in “Commercial Clothes Washer Analysis.xlsx”:

| Efficiency Level | Front | Top |
|------------------|-------|-----|
| Baseline         | 37%   | 63% |
| ENERGY STAR®     | 99%   | 1%  |

## 2.1.2 Clothes Dryer

### DESCRIPTION

This measure is for the installation of a residential clothes dryer, utilized in a commercial setting, meeting the ENERGY STAR® criteria. ENERGY STAR® qualified clothes dryers save energy through a combination of more efficient drying and reduced runtime of the drying cycle. More efficient drying is achieved through increased insulation, modifying operating conditions such as air flow and/or heat input rate, improving air circulation through better drum design or booster fans, and improving efficiency of motors. Reducing the runtime of dryers through automatic termination by temperature and moisture sensors is believed to have the greatest potential for reducing energy use in clothes dryers<sup>13</sup>. ENERGY STAR® provides criteria for both gas and electric clothes dryers.

This measure was developed to be applicable to the following program types: TOS, NC. If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

Clothes dryer must meet the ENERGY STAR® criteria, as required by the program.

### DEFINITION OF BASELINE EQUIPMENT

The baseline condition is a clothes dryer meeting the minimum federal requirements for units manufactured on or after January 1, 2015.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 14 years.<sup>14</sup>

### DEEMED MEASURE COST

| Dryer Size | Incremental Cost <sup>15</sup> |
|------------|--------------------------------|
| Standard   | \$75                           |
| Compact    | \$105                          |

### LOADSHAPE

Loadshape - Miscellaneous BUS

---

<sup>13</sup> ENERGY STAR® Market & Industry Scoping Report. Residential Clothes Dryers. Table 8. November 2011.

[http://www.energystar.gov/ia/products/downloads/ENERGY\\_STAR\\_Scoping\\_Report\\_Residential\\_Clothes\\_Dryers.pdf](http://www.energystar.gov/ia/products/downloads/ENERGY_STAR_Scoping_Report_Residential_Clothes_Dryers.pdf)

<sup>14</sup> Based on an average estimated range of 12-16 years. ENERGY STAR® Market & Industry Scoping Report. Residential Clothes Dryers. November 2011.

[http://www.energystar.gov/ia/products/downloads/ENERGY\\_STAR\\_Scoping\\_Report\\_Residential\\_Clothes\\_Dryers.pdf](http://www.energystar.gov/ia/products/downloads/ENERGY_STAR_Scoping_Report_Residential_Clothes_Dryers.pdf)

<sup>15</sup> Cost based on ENERGY STAR® Savings Calculator for ENERGY STAR® Qualified Appliances.

[https://www.energystar.gov/sites/default/files/asset/document/appliance\\_calculator.xlsx](https://www.energystar.gov/sites/default/files/asset/document/appliance_calculator.xlsx)

**Algorithm**

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh = \left( \frac{Load}{CEF_{base}} - \frac{Load}{CEF_{eff}} \right) * N_{cycles} * \%Electric$$

Where:

**Load** = The average total weight (lbs) of clothes per drying cycle. If dryer size is unknown, assume standard.

| Drver Size | Load (lbs) <sup>16</sup> |
|------------|--------------------------|
| Standard   | 8.45                     |
| Compact    | 3                        |

**CEFbase** = Combined energy factor (CEF) (lbs/kWh) of the baseline unit is based on existing federal standards energy factor and adjusted to CEF as performed in the ENERGY STAR® analysis<sup>17</sup>. If product class unknown, assume electric, standard.

| Product Class   | CEFbase (lbs/kWh)  |
|---|--------------------|
| Vented Electric, Standard (≥ 4.4 ft <sup>3</sup> )        | 3.11               |
| Vented Electric, Compact (120V) (< 4.4 ft <sup>3</sup> )  | 3.01               |
| Vented Electric, Compact (240V) (<4.4 ft <sup>3</sup> )   | 2.73               |
| Ventless Electric, Compact (240V) (<4.4 ft <sup>3</sup> ) | 2.13               |
| Vented Gas  | 2.84 <sup>18</sup> |

**CEFeff** = CEF (lbs/kWh) of the ENERGY STAR® unit based on ENERGY STAR® requirements.<sup>19</sup> If product class unknown, assume electric, standard.

| Product Class  | CEFeff             |
|--|--------------------|
| Vented or Ventless Electric, Standard (≥ 4.4 ft <sup>3</sup> ) | 3.93               |
| Vented or Ventless Electric, Compact (120V) (< 4.4             | 3.80               |
| Vented Electric, Compact (240V) (< 4.4 ft <sup>3</sup> )       | 3.45               |
| Ventless Electric, Compact (240V) (< 4.4 ft <sup>3</sup> )     | 2.68               |
| Vented Gas   | 3.48 <sup>20</sup> |

<sup>16</sup> Based on ENERGY STAR® test procedures. [https://www.energystar.gov/index.cfm?c=clothesdry.pr\\_crit\\_clothes\\_dryers](https://www.energystar.gov/index.cfm?c=clothesdry.pr_crit_clothes_dryers)

<sup>17</sup> ENERGY STAR® Draft 2 Version 1.0 Clothes Dryers Data and Analysis

<sup>18</sup> Federal standards report CEF for gas clothes dryers in terms of lbs/kWh. To determine gas savings, this number is later converted to therms.

<sup>19</sup> ENERGY STAR® Clothes Dryers Key Product Criteria.

[https://www.energystar.gov/index.cfm?c=clothesdry.pr\\_crit\\_clothes\\_dryers](https://www.energystar.gov/index.cfm?c=clothesdry.pr_crit_clothes_dryers)

<sup>20</sup> Federal standards report CEF for gas clothes dryers in terms of lbs/kWh. To determine gas savings, this number is later converted to therms.



Ncycles = Number of dryer cycles per year. Use actual data if available. If unknown, refer to the table below.<sup>21</sup>

| Application           | Cycles per Year |
|-----------------------|-----------------|
| Multi-family          | 1,074           |
| Laundromat            | 1,483           |
| On-Premise Laundromat | 3,607           |

%Electric = The percent of overall savings coming from electricity  
 = 100% for electric dryers, 5% for gas dryers<sup>22</sup>

Using defaults provided above:

| Product Class  | kWh          |            |                       |
|--|--------------|------------|-----------------------|
|  | Multi-family | Laundromat | On-Premise Laundromat |
| Vented Electric, Standard ( $\geq 4.4 \text{ ft}^3$ )      | 608.9        | 840.7      | 2044.9                |
| Vented Electric, Compact (120V) ( $< 4.4 \text{ ft}^3$ )   | 222.5        | 307.3      | 747.4                 |
| Vented Electric, Compact (240V) ( $< 4.4 \text{ ft}^3$ )   | 246.3        | 340.1      | 827.2                 |
| Ventless Electric, Compact (240V) ( $< 4.4 \text{ ft}^3$ ) | 310.4        | 428.7      | 1042.6                |
| Vented Gas   | 29.4         | 40.6       | 98.7                  |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

$\Delta kWh$  = Energy Savings as calculated above

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 =0.0001379439<sup>23</sup>

Using defaults provided above:

| Product Class   | kW           |            |                       |
|---|--------------|------------|-----------------------|
|   | Multi-family | Laundromat | On-Premise Laundromat |
| Vented Electric, Standard ( $\geq 4.4 \text{ ft}^3$ ) | 0.0840       | 0.1160     | 0.2821                |

<sup>21</sup> NOPR analysis for DOE Commercial Clothes Washer standard. Annual use cycles of 1,074 and 1,483 for multi-family and laundromat applications, respectively. <https://www.regulations.gov/document?D=EERE-2012-BT-STD-0020-0021>. On-premise laundromat cycle average value for dryer cycles in healthcare facility, hotels, drycleaners and laundromats from tests conducted in Nicor Gas Emerging Technology Program’s Commercial Dryer Modulation Retrofit Public Project Report.

<sup>22</sup> %Electric accounts for the fact that some of the savings on gas dryers comes from electricity (motors, controls, etc). 5% was determined using a ratio of the electric to total savings from gas dryers given by ENERGY STAR® Draft 2 Version 1.0 Clothes Dryers Data and Analysis. Value reported in 2015 EPA EnergySTAR appliance calculator.

<sup>23</sup> Based on Ameren Missouri 2016 Loadshape for Business Miscellaneous End-Use. Upon inspection and comparison to the Residential clothes washer coincidence factor, this is a reasonable assumption until data becomes available to inform a technology specific coincidence factor. Given that business laundry schedules are likely more variable compared to residential, it follows that less overlap with the system peak hour is possible.

| Product Class   | kW           |            |                       |
|---|--------------|------------|-----------------------|
|   | Multi-family | Laundromat | On-Premise Laundromat |
| Vented Electric, Compact (120V) (< 4.4 ft <sup>3</sup> )  | 0.0307       | 0.0424     | 0.1031                |
| Vented Electric, Compact (240V) (<4.4 ft <sup>3</sup> )   | 0.0340       | 0.0469     | 0.1141                |
| Ventless Electric, Compact (240V) (<4.4 ft <sup>3</sup> ) | 0.0428       | 0.0591     | 0.1438                |
| Vented Gas  | 0.0041       | 0.0056     | 0.0136                |

**NATURAL GAS ENERGY SAVINGS**

Natural gas savings only apply to ENERGY STAR® vented gas clothes dryers.

$$\Delta Therm = \left( \frac{Load}{CEF_{base}} - \frac{Load}{CEF_{eff}} \right) * Ncycles * Therm\_convert * \%Gas$$

Where:

Therm\_convert = Conversion factor from kWh to Therm  
 = 0.03413

%Gas = Percent of overall savings coming from gas  
 = 0% for electric units and 84% for gas units<sup>24</sup>

Using defaults provided above:

$$\Delta Therms = (8.45/2.84 - 8.45/3.48) * Ncycles * 0.03413 * 0.84$$

| Product Class | ΔTherms      |            |                       |
|---------------|--------------|------------|-----------------------|
|               | Multi-family | Laundromat | On-Premise Laundromat |
| Vented Gas    | 16.8         | 23.3       | 56.6                  |

**PEAK GAS SAVINGS**

Savings for this measure is assumed to be evenly spread across the year. The Peak Gas Savings is therefore assumed to be:

$$\Delta PeakTherms = \frac{\Delta Therms}{365.25}$$

Where:

ΔTherms = Therm impact calculated above

365.25 = Days per year

Using defaults provided above:

<sup>24</sup> %Gas accounts for the fact that some of the savings on gas dryers comes from electricity (motors, controls, etc). 84% was determined using a ratio of the gas to total savings from gas dryers given by ENERGY STAR® Draft 2 Version 1.0 Clothes Dryers Data and Analysis.

| Product Class | $\Delta$ PeakTherms |            |                       |
|---------------|---------------------|------------|-----------------------|
|               | Multi-family        | Laundromat | On-Premise Laundromat |
| Vented Gas    | 0.0461              | 0.0637     | 0.1549                |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.2 Food Service End Use

### 2.2.1 Combination Oven

#### DESCRIPTION

This measure applies to full or half-sized electric ENERGY STAR® combination ovens with a pan capacity  $\geq 5$  and  $\leq 20$  and to full or half-sized natural gas fired ENERGY STAR® combination ovens with a pan capacity  $\geq 6$  installed in a commercial kitchen. Combination ovens combines the function of hot air convection (convection mode), saturated and superheated steam heating (steam mode), and combination convection/steam mode for moist heating, to perform steaming, baking, roasting, re-thermalizing, and proofing of various food products. ENERGY STAR® certified combination ovens are approximately 20% more efficient than standard ovens.

This measure was developed to be applicable to the following program type: TOS.

If applied to other program types, measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be an ENERGY STAR® certified combination oven meeting idle energy rate (kW or Btu/hr) and cooking efficiency (%) limits, as determined by fuel type, operation mode (steam or convection), and pan capacity.

#### ENERGY STAR® Requirements (Version 2.2, Effective October 7, 2015)

| Fuel Type   | Operation       | Idle Rate (Btu/hr for Gas, kW for Electric) | Cooking-Energy Efficiency (%) |
|-------------|-----------------|---|-------------------------------|
| Natural Gas | Steam Mode      | $\leq 200P+6,511$                           | $\geq 41$                     |
|             | Convection Mode | $\leq 150P+5,425$                           | $\geq 56$                     |
| Electric    | Steam Mode      | $\leq 0.133P+0.6400$                        | $\geq 55$                     |
|             | Convection Mode | $\leq 0.080P+0.4989$                        | $\geq 76$                     |

Note: P = Pan capacity as defined in Section 1.T of the Commercial Ovens Program Requirements Version 2.2<sup>25</sup>

#### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new electric or natural gas combination oven that is not ENERGY STAR® certified.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>26</sup>

#### DEEMED MEASURE COST

The incremental capital cost for this measure is \$4,300.<sup>27</sup>

<sup>25</sup> Pan capacity is defined as the number of steam table pans the combination oven is able to accommodate as per the ASTM F-1495-05 standard specification.

<https://www.energystar.gov/sites/default/files/Commercial%20Ovens%20Final%20Version%202.2%20Specification.pdf>

<sup>26</sup> Lifetime from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator, which cites reference as “FSTC research on available models, 2009”

[https://www.energystar.gov/sites/default/files/asset/document/commercial\\_kitchen\\_equipment\\_calculator.xlsx](https://www.energystar.gov/sites/default/files/asset/document/commercial_kitchen_equipment_calculator.xlsx)

<sup>27</sup> Nicor Gas Energy Efficiency Plan 2011-2014. Revised Plan Filed Pursuant to Order Docket 10-0562, May 27, 2011.

**LOADSHAPE**

Cooking BUS

Miscellaneous BUS (only use this loadshape for gas savings)

---

**Algorithm**

---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Custom calculation for an electric combination oven below.<sup>28</sup>

$$\Delta kWh = (\Delta CookingEnergy_{ConvElec} + \Delta CookingEnergy_{SteamElec} + \Delta IdleEnergy_{ConvElec} + \Delta IdleEnergy_{SteamElec}) * Days / 1,000$$

Where:

- $\Delta CookingEnergy_{ConvElec}$  = Difference in cooking energy between baseline and efficient combination oven in convection mode  
 =  $FoodCooked_{Elec} * (EFOOD_{ConvElec} / ElecEFF_{ConvBase} - EFOOD_{ConvElec} / ElecEFF_{ConvEE}) * \%Conv$
- $\Delta CookingEnergy_{SteamElec}$  = Difference in cooking energy between baseline and efficient combination oven in steam mode  
 =  $FoodCooked_{Elec} * (EFOOD_{SteamElec} / ElecEFF_{SteamBase} - EFOOD_{SteamElec} / ElecEFF_{SteamEE}) * \%Steam$
- $\Delta IdleEnergy_{ConvElec}$  = Difference in idle energy between baseline and efficient combination oven in convection mode  
 =  $((ElecIDLE_{ConvBase} * ((Hours - FoodCooked_{Elec} / ElecPC_{ConvBase}) * \%Conv)) - (ElecIDLE_{ConvEE} * ((Hours - FoodCooked_{Elec} / ElecPC_{ConvEE}) * \%Conv)))$
- $\Delta IdleEnergy_{SteamElec}$  = Difference in idle energy between baseline and efficient combination oven in steam mode  
 =  $[(ElecIDLE_{SteamBase} * ((Hours - FoodCooked_{Elec} / ElecPC_{SteamBase}) * \%Steam)) - (ElecIDLE_{SteamEE} * ((Hours - FoodCooked_{Elec} / ElecPC_{SteamEE}) * \%Steam))]$
- Days = Annual days of operation  
 = Custom or if unknown, use 365.25 days per year
- 1,000 = Wh to kWh conversion factor

Where:

- $FoodCooked_{Elec}$  = Food cooked per day for electric combination oven  
 = Custom, or if unknown, use 200 lbs if P < 15 or 250 lbs if P ≥ 15
- $EFOOD_{ConvElec}$  = ASTM energy to food for electric combination oven in convection mode

---

<sup>28</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

= 73.2 Wh/lb

ElecEff

= Cooking energy efficiency of electric combination oven  
 = Custom or if unknown, use values from table below

|                          | Base | EE  |
|--------------------------|------|-----|
| ElecEFF <sub>Conv</sub>  | 72%  | 76% |
| ElecEFF <sub>Steam</sub> | 49%  | 55% |

%<sub>Conv</sub>

= Percentage of time in convection mode  
 = Custom or if unknown, use 50%

EFOOD<sub>SteamElec</sub>

= ASTM energy to food for electric combination oven in steam mode  
 = 30.8 Wh/lb

%<sub>steam</sub>

= Percentage of time in steam mode  
 = 1 - %<sub>conv</sub>

ElecIDLE<sub>Base</sub>

= Idle energy rate (W) of baseline electric combination oven  
 = Custom or if unknown, use values from table below

| Pan Capacity | Convection Mode<br>(ElecIDLE <sub>ConvBase</sub> ) | Steam Mode<br>(ElecIDLE <sub>SteamBase</sub> ) |
|--------------|--|--|
| < 15         | 1,320  | 5,260  |
| ≥ 15         | 2,280  | 8,710  |

Hours

= Average daily hours of operation  
 = Custom or if unknown, use 12 hours per day

ElecPC<sub>Base</sub>

= Production capacity (lbs/hr) of baseline electric combination oven  
 = Custom or if unknown, use values from table below

| Pan Capacity | Convection Mode<br>(ElecPC <sub>ConvBase</sub> ) | Steam Mode<br>(ElecPC <sub>SteamBase</sub> ) |
|--------------|--|--|
| < 15         | 79   | 126  |
| ≥15          | 166  | 295  |

ElecIDLE<sub>ConvEE</sub>

= Idle energy rate of ENERGY STAR® electric combination oven in convection mode  
 = (0.08\*P + 0.4989)\*1,000

ElecPC<sub>EE</sub>

= Production capacity (lbs/hr) of ENERGY STAR® electric combination oven  
 = Custom or if unknown, use values from table below

| Pan Capacity | Convection Mode<br>(ElecPC <sub>ConvEE</sub> ) | Steam Mode<br>(ElecPC <sub>SteamEE</sub> ) |
|--------------|--|--|
| < 15         | 119  | 177  |
| ≥ 15         | 201  | 349  |

$ElecIDLE_{SteamEE}$  = Idle energy rate of ENERGY STAR® electric combination oven in steam mode  
 =  $(0.133 * P + 0.64) * 1,000$

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

$\Delta kWh$  = Electric energy savings, calculated above  
 CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0001998949<sup>29</sup>

Other variables as defined above.

**NATURAL GAS ENERGY SAVINGS**

Custom calculation for a gas combination oven below.<sup>30</sup>

$$\Delta Therms = (\Delta CookingEnergy_{ConvGas} + \Delta CookingEnergy_{SteamGas} + \Delta IdleEnergy_{ConvGas} + \Delta IdleEnergy_{SteamGas}) * Days / 100,000$$

Where:

$\Delta CookingEnergy_{ConvGas}$  = Difference in cooking energy between baseline and efficient combination oven in convection mode  
 =  $FoodCooked_{Gas} * (EFOOD_{ConvGas} / GasEFF_{ConvBase} - EFOOD_{ConvGas} / GasEFF_{ConvEE}) * \% Conv$

$\Delta CookingEnergy_{SteamGas}$  = Difference in cooking energy between baseline and efficient combination oven in steam mode  
 =  $FoodCooked_{Gas} * (EFOOD_{SteamGas} / GasEFF_{SteamBase} - EFOOD_{SteamGas} / GasEFF_{SteamEE}) * \% Steam$

$\Delta IdleEnergy_{ConvGas}$  = Difference in idle energy between baseline and efficient combination oven in convection mode  
 =  $((GasIDLE_{ConvBase} * ((Hours - FoodCooked_{Gas} / GasPC_{ConvBase}) * \% Conv)) - (GasIDLE_{ConvEE} * ((Hours - FoodCooked_{Gas} / GasPC_{ConvEE}) * \% Conv)))$

$\Delta IdleEnergy_{SteamGas}$  = Difference in idle energy between baseline and efficient combination oven in steam mode

<sup>29</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Commercial Electric Cooking. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

<sup>30</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

$$= [(GasIDLE_{SteamBase} * ((Hours - FoodCooked_{Gas} / GasPC_{SteamBase}) * \%Steam)) - (GasIDLE_{SteamEE} * ((Hours - FoodCooked_{Gas} / GasPC_{SteamEE}) * \%Steam))]$$

100,000

= Btu to therms conversion factor

Where:

FoodCooked<sub>Gas</sub>

= Food cooked per day for gas combination oven

= Custom, or if unknown, use 200 lbs if P <15, 250 lbs if 15 ≤ P 30, or 400 lbs if P ≥30

EFOOD<sub>ConvGas</sub>

= ASTM energy to food for gas combination oven in convection mode

= 250 Btu/lb

GasEff

= Cooking energy efficiency of gas combination oven

= Custom or if unknown, use values from table below

|                         | Base | EE  |
|-------------------------|------|-----|
| GasEFF <sub>Conv</sub>  | 52%  | 56% |
| GasEFF <sub>Steam</sub> | 39%  | 41% |

EFOOD<sub>SteamGas</sub>

= ASTM energy to food for gas combination oven in steam mode

= 105 Btu/lb

GasIDLE<sub>Base</sub>

= Idle energy rate (Btu/hr) of baseline gas combination oven

= Custom or if unknown, use values from table below

| Pan Capacity | Convection Mode<br>(GasIDLE <sub>ConvBase</sub> ) | Steam Mode<br>(GasIDLE <sub>SteamBase</sub> ) |
|--------------|---|---|
| < 15         | 8,747   | 18,656  |
| 15 ≤ P 30    | 10,788  | 24,562  |
| ≥30          | 13,000  | 43,300  |

GasPC<sub>Base</sub>

= Production capacity (lbs/hr) of baseline gas combination oven

= Custom of if unknown, use values from table below

| Pan Capacity | Convection Mode<br>(GasPC <sub>ConvBase</sub> ) | Steam Mode<br>(GasPC <sub>SteamBase</sub> ) |
|--------------|---|---|
| < 15         | 125   | 195   |
| 15 ≤ P 30    | 176   | 211   |
| ≥30          | 392   | 579   |

GasIDLE<sub>ConvEE</sub>

= Idle energy rate of ENERGY STAR® gas combination oven in convection mode

= 150\*P + 5,425

GasPC<sub>EE</sub>

= Production capacity (lbs/hr) of ENERGY STAR® gas combination oven

= Custom of if unknown, use values from table below



| Pan Capacity | Convection Mode<br>(GasPC <sub>ConvEE</sub> ) | Steam Mode<br>(GasPC <sub>SteamEE</sub> ) |
|--------------|---|---|
| < 15         | 124   | 172                                       |
| 15 ≤ P 30    | 210   | 277                                       |
| ≥30          | 394   | 640                                       |

GasIDLE<sub>SteamEE</sub> = Idle energy rate of ENERGY STAR® gas combination oven in steam mode  
 = 200\*P +6,511

Other variables as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.2.2 Commercial Steam Cooker

### DESCRIPTION

This measure applies to electric or natural gas fired ENERGY STAR® steam cookers installed in a commercial kitchen. Commercial steam cookers contain compartments where steam energy is transferred to food by direct contact. ENERGY STAR® certified steam cookers have shorter cook times, higher production rates, and reduced heat loss due to better insulation and more efficient steam delivery.

This measure was developed to be applicable to the following program types: TOS.

If applied to other program types, measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be an ENERGY STAR® certified steam cooker meeting idle energy rate (W or Btu/hr) and cooking efficiency (%) limits, as determined by fuel type and pan capacity.

### ENERGY STAR® Requirements (Version 1.2, Effective August 1, 2003)

| Pan Capacity     | Electric Efficiency Requirements     |                       | Natural Gas Efficiency |                       |
|------------------|--------------------------------------|-----------------------|------------------------|-----------------------|
|                  | Idle Energy Rate<br>Idle Energy Rate | Cooking<br>Efficiency | Idle Energy Rate       | Cooking<br>Efficiency |
| 3-pan            | ≤ 400 W                              | ≥ 50%                 | ≤ 6,250 Btu/hr         | ≥ 38%                 |
| 4-pan            | ≤ 530 W                              |                       | ≤ 8,350 Btu/hr         | N/A                   |
| 5-pan            | ≤ 670 W                              |                       | ≤ 10,400 Btu/hr        |                       |
| 6-pan and larger | ≤ 800 W                              |                       | ≤ 12,500 Btu/hr        |                       |

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new electric or natural gas steam cooker that is not ENERGY STAR® certified.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>31</sup>

### DEEMED MEASURE COST

Actual incremental cost for this measure should be used. If actuals are unavailable use \$4,150.

### LOADSHAPE

Cooking BUS

Miscellaneous BUS (only use this loadshape for gas savings)

<sup>31</sup> Lifetime from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator, which cites reference as “FSTC research on available models, 2009”  
[http://www.energystar.gov/buildings/sites/default/uploads/files/commercial\\_kitchen\\_equipment\\_calculator.xlsx](http://www.energystar.gov/buildings/sites/default/uploads/files/commercial_kitchen_equipment_calculator.xlsx)

**Algorithm**

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Custom calculation for an electric steam cooker below, otherwise use deemed value from the table that follows.<sup>32</sup>

$$\Delta kWh = (\Delta IdleEnergy + \Delta CookingEnergy) * Days / 1,000$$

Where:

$$\Delta IdleEnergy = [(1 - SteamMode) * (IdleRate_{Base} + SteamMode * Production_{Base} * Pans * E_{FOOD} / Eff_{Base}) * (Hours - FoodCooked / Production_{Base} * Pans)] - [(1 - SteamMode) * (IdleRate_{ESTAR} + SteamMode * Production_{ESTAR} * Pans * E_{FOOD} / Eff_{ESTAR}) * (Hours - FoodCooked / Production_{ESTAR} * Pans)]$$

$$\Delta CookingEnergy = (FoodCooked * E_{FOOD} / Eff_{Base}) - (FoodCooked * E_{FOOD} / Eff_{ESTAR})$$

Where:

$\Delta IdleEnergy$  = Difference in idle energy between baseline and efficient steam cooker

$\Delta CookingEnergy$  = Difference in cooking energy between baseline and efficient steam cooker

Days = Annual days of operation  
= Custom or if unknown, use 365.25 days per year

1,000 = Wh to kWh conversion factor

SteamMode = Time (%) in constant steam mode  
= Custom or if unknown, use 40%

$IdleRate_{Base}$  = Idle energy rate (W) of baseline electric steam cooker  
= 1,100 W<sup>33</sup>

$IdleRate_{ESTAR}$  = Idle energy rate (W) of ENERGY STAR® electric steam cooker  
= Custom or if unknown, use value from table below as determined by pan capacity

| Pan Capacity | $IdleRate_{ESTAR}$ |
|--------------|--------------------|
| 3            | 400                |
| 4            | 530                |
| 5            | 670                |
| 6            | 800                |
| 10           | 800                |

$Production_{Base}$  = Production capacity (lb/hr) per pan of baseline electric steam cooker

<sup>32</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

<sup>33</sup> Idle energy rate for baseline steam cookers is the average of rates provided by ENERGY STAR® for steam generator and boiler-based cookers

- = 23.3 lb/hr
- Production<sub>ESTAR</sub> = Production capacity (lb/hr) per pan of ENERGY STAR® electric steam cooker  
= Custom or if unknown, use 16.7 lb/hr
- Pans = Pan capacity of steam cooker  
= Custom or if unknown, use 6 pans
- EFOOD = ASTM energy to food  
= 30.8 Wh/lb
- Eff<sub>Base</sub> = Cooking efficiency (%) of baseline electric steam cooker<sup>34</sup>  
= 28%
- Eff<sub>ESTAR</sub> = Cooking efficiency (%) of ENERGY STAR® electric steam cooker  
= Custom or if unknown, use 50%
- Hours = Average daily hours of operation  
= Custom or if unknown, use 12 hours per day
- FoodCooked = Food cooked per day (lbs)  
= Custom or if unknown, use 100 pounds

Savings for all pan capacities are presented in the table below.

| Energy Consumption of Electric Steam Cookers |                     |                      |               |
|--|---------------------|----------------------|---------------|
| Pan Capacity                                 | kWh <sub>Base</sub> | kWh <sub>ESTAR</sub> | Savings (kWh) |
| 3  | 18,438.9            | 7,637.6              | 10,801.3      |
| 4  | 23,018.6            | 9,784.1              | 13,234.5      |
| 5  | 27,563.8            | 11,953.8             | 15,609.9      |
| 6  | 32,091.7            | 14,100.1             | 17,991.6      |
| 10   | 50,134.5            | 21,384.3             | 28,750.1      |
| Average                                      | 30,249.5            | 12,972.0             | 17,277.5      |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

- ΔkWh = Electric energy savings, calculated above
- CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
= 0.0001998949<sup>35</sup>

Other variables as defined above.

<sup>34</sup> Cooking efficiency for baseline steam cookers is the average of efficiencies provided by ENERGY STAR® Commercial Kitchen Equipment Savings Calculator for steam generator and boiler-based cookers

<sup>35</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Commercial Electric Cooking. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

**NATURAL GAS ENERGY SAVINGS**

Custom calculation for a natural gas steam cooker below, otherwise use deemed value from the table that follows.<sup>36</sup>

$$\Delta Therms = (\Delta IdleEnergy + \Delta CookingEnergy) * Days / 100,000$$

Where:

$$\Delta IdleEnergy = [(1 - SteamMode) * (IdleRate_{Base} + SteamMode * Production_{Base} * Pans * EFOOD / Eff_{Base}) * (Hours - FoodCooked / Production_{Base} * Pans)] - [(1 - SteamMode) * (IdleRate_{ESTAR} + SteamMode * Production_{ESTAR} * Pans * EFOOD / Eff_{ESTAR}) * (Hours - FoodCooked / Production_{ESTAR} * Pans)]$$

$$\Delta CookingEnergy = (FoodCooked * EFOOD / Eff_{Base}) - (FoodCooked * EFOOD / Eff_{ESTAR})$$

Where:

100,000 = Btu to therms conversion factor

IdleRate<sub>Base</sub> = Idle energy rate (Btu/hr) of baseline gas steam cooker  
 = 16,500 Btu/hr<sup>37</sup>

IdleRate<sub>ESTAR</sub> = Idle energy rate (Btu/hr) of ENERGY STAR® gas steam cooker  
 = Custom or if unknown, use value from table below as determined by pan capacity

| Pan Capacity | IdleRate <sub>ESTAR</sub> |
|--------------|---------------------------|
| 3            | 6,250                     |
| 5            | 10,400                    |
| 6            | 12,500                    |
| 10           | 12,500                    |

Production<sub>Base</sub> = Production capacity (lb/hr) per pan of baseline gas steam cooker  
 = 23.3 lb/hr

Production<sub>ESTAR</sub> = Production capacity (lb/hr) per pan of ENERGY STAR® gas steam cooker  
 = Custom or if unknown, use 20 lb/hr

EFOOD = ASTM energy to food  
 = 105 Btu/lb

Eff<sub>Base</sub> = Cooking efficiency (%) of baseline gas steam cooker<sup>38</sup>  
 = 16.5%

Eff<sub>ESTAR</sub> = Cooking efficiency (%) of ENERGY STAR® gas steam cooker

<sup>36</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

<sup>37</sup> Idle energy rate for baseline steam cookers is the average of rates provided by ENERGY STAR® for steam generator and boiler-based cookers

<sup>38</sup> Cooking efficiency for baseline steam cookers is the average of efficiencies provided by ENERGY STAR® for steam generator and boiler-based cookers

= Custom or if unknown, use 38%

Other variables as defined above.

Savings for all pan capacities are presented in the table below.

| Energy Consumption of Gas Steam Cookers |                        |                         |                  |
|---|------------------------|-------------------------|------------------|
| Pan Capacity                            | Therms <sub>Base</sub> | Therms <sub>ESTAR</sub> | Savings (Therms) |
| 3                                       | 1,301.5                | 492.8                   | 808.7            |
| 5                                       | 1,842.1                | 795.7                   | 1,046.4          |
| 6                                       | 2,107.2                | 947.8                   | 1,159.4          |
| 10                                      | 3,157.4                | 1,344.5                 | 1,812.9          |
| Average                                 | 1,996.0                | 845.0                   | 1,150.0          |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

Custom calculation below, otherwise use deemed value of 134,412.0 gallons per year.<sup>39</sup> Savings are the same for electric and gas steam cookers.

$$\Delta Water = (WaterUse_{Base} - WaterUse_{ESTAR}) * Hours * Days$$

Where:

WaterUse<sub>Base</sub> = Water use (gal/hr) of baseline steam cooker  
 = 40 gal/hr

WaterUse<sub>ESTAR</sub> = Water use (gal/hr) of ENERGY STAR® steam cooker<sup>40</sup>  
 = Custom or if unknown, use 9.3 gal/hr

Other variables as defined above

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>39</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

<sup>40</sup> Water use for ENERGY STAR® steam cookers is the average of water use values provided by ENERGY STAR® for steam generator, boiler-based, and boilerless cookers

### 2.2.3 Conveyor Oven

#### DESCRIPTION

This measure applies to a natural gas fired high efficiency gas conveyor oven installed in a commercial kitchen with a conveyor width greater than 25 inches.

Conveyor ovens are available using four different heating processes: infrared, natural convection with a ceramic baking hearth, forced convection or air impingement, or a combination of infrared and forced convection. Conveyor ovens are typically used for producing a limited number of products with similar cooking requirements at high production rates.

Some manufacturers offer an air-curtain feature at either end of the cooking chamber that helps to keep the heated air inside the conveyor oven. The air curtain operates as a virtual oven wall and helps reduce both the idle energy of the oven and the resultant heat gain to the kitchen.

This measure was developed to be applicable to the following program types: TOS.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure the installed equipment must be a natural gas conveyor oven with a tested baking energy efficiency > 42% and an idle energy consumption rate < 57,000 Btu/hr utilizing ASTM standard F1817.

#### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new, standard, natural gas conveyor oven.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 17 years.<sup>41</sup>

#### DEEMED MEASURE COST

The incremental capital cost for this measure is \$4,731.<sup>42</sup>

#### LOADSHAPE

Miscellaneous BUS

---

---

### Algorithm

---

---

#### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

N/A<sup>43</sup>

---

<sup>41</sup> Nicor Gas Energy Efficiency Plan 2011-2014. Revised Plan Filed Pursuant to Order Docket 10-0562, May 27, 2011

<sup>42</sup> Pacific Gas and Electric Company workpaper PGECOFST117, Commercial Conveyor Ovens, Food Service Equipment Workpaper June 1, 2009.

<sup>43</sup> There are currently no existing testing or efficiency standards for electric conveyor ovens.

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

Custom calculation is shown below. In instances where site specific information is unavailable for any given variable, the following default values may be used.<sup>44</sup> In instances where all defaults are used, the resulting savings are 839.3 therms annually.

$$100,000 \Delta Therms = (\Delta PreheatEnergy + \Delta IdleEnergy + \Delta CookingEnergy) * Days / 100,000$$

Where:

- $\Delta PreheatEnergy$  = NoPreheats \* (Preheat<sub>Base</sub> – Preheat<sub>EE</sub>)
- $\Delta IdleEnergy$  = (IdleRate<sub>Base</sub>\* (Hours – (FoodCooked/Production<sub>Base</sub>)) – (IdleRate<sub>EE</sub> \* (Hours – (FoodCooked/Production<sub>EE</sub>)))
- $\Delta CookingEnergy$  = (FoodCooked \* EFOOD/ Eff<sub>Base</sub>) - (FoodCooked \* EFOOD/ Eff<sub>EE</sub>)

Where:

- Days = Annual days of operation  
= Custom or if unknown, use 365.25 days per year
- 100,000 = Btu to therms conversion factor
- NoPreheats = Number of preheats per day  
= Custom or if unknown, use 1 preheat per day
- Preheat<sub>Base</sub> = Preheat energy of baseline oven  
= 35,000 Btu
- Preheat<sub>EE</sub> = Preheat energy of efficient oven  
= Custom or if unknown, use 18,000 Btu
- IdleRate<sub>Base</sub> = Idle energy rate of baseline oven  
= 70,000 Btu/hr
- IdleRate<sub>EE</sub> = Idle energy rate of efficient oven  
= Custom or if unknown, use 57,000 Btu/hr
- Hours = Average daily hours of operation  
= Custom or if unknown, use 12 hours per day
- FoodCooked = Number of pizzas cooked per day  
= Custom or if unknown, use 250 pizzas per day
- Production<sub>Base</sub> = Production capacity of baseline oven  
= 150 pizzas per hour
- Production<sub>EE</sub> = Production capacity of efficient oven

---

<sup>44</sup> Default values based on the Food Service Technology Center’s online Gas Conveyor Oven Life-Cycle Cost Calculator.



|                     |  |
|---------------------|--|
|                     | = Custom or if unknown, use 220 pizzas per hour                                      |
| E <sub>FOOD</sub>   | = ASTM energy to food<br>= 166 Btu/pizza <sup>45</sup>                               |
| Eff <sub>Base</sub> | = Heavy-load cooking efficiency of baseline oven<br>= 20%                            |
| Eff <sub>EE</sub>   | = Heavy-load cooking efficiency of efficient oven<br>= Custom or if unknown, use 42% |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>45</sup> Calibrated value to give results consistent with the Food Service Technology Center’s online Gas Conveyor Oven Life-Cycle Cost Calculator. This value is consistent with values found by FSTC experimental testing and values recognized by ENERGY STAR®.

## 2.2.4 Fryer

### DESCRIPTION

This measure applies to electric or natural gas fired ENERGY STAR® certified fryers installed in a commercial kitchen. ENERGY STAR® fryers offer shorter cook times and higher production rates through advanced burner and heat exchanger designs. Fry pot insulation reduces standby losses, resulting in lower idle energy rates. Standard-sized ENERGY STAR® fryers are up to 30% more efficient, and large-vat ENERGY STAR® fryers are up to 35% more efficient, than standard fryers.

This measure was developed to be applicable to the following program type: TOS.

If applied to other program types, measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be an ENERGY STAR® certified fryer meeting idle energy rate (W or Btu/hr) and cooking efficiency (%) limits, as determined by both fuel type and fryer capacity (standard versus large vat).

### ENERGY STAR® Requirements (Version 2.0, Effective April 22, 2011)

| Fryer Capacity                | Electric Efficiency Requirements |                                | Natural Gas Efficiency Requirements |                                |
|-------------------------------|----------------------------------|--------------------------------|-------------------------------------|--------------------------------|
|                               | Idle Energy Rate                 | Cooking Efficiency Consumption | Idle Energy Rate                    | Cooking Efficiency Consumption |
| Standard Open Deep-Fat Fryer  | ≤ 1,000 W                        | ≥ 80%                          | ≤ 9,000 Btu/hr                      | ≥ 50%                          |
| Large Vat Open Deep-Fat Fryer | ≤ 1,100 W                        |                                | ≤ 12,000 Btu/hr                     |                                |

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new electric or natural gas fryer that is not ENERGY STAR® certified.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>46</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure is \$210 for standard electric, \$0 for large vat electric, \$0 for standard gas, and \$1,120 for large vat gas fryers.<sup>47</sup>

### LOADSHAPE

Cooking BUS

Miscellaneous BUS (only use this loadshape for gas savings)

<sup>46</sup> Lifetime from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator, which cites reference as “FSTC research on available models, 2009  
[https://www.energystar.gov/sites/default/files/asset/document/commercial\\_kitchen\\_equipment\\_calculator.xlsx](https://www.energystar.gov/sites/default/files/asset/document/commercial_kitchen_equipment_calculator.xlsx)

<sup>47</sup> Measure costs from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator, which cites reference as “EPA research using AutoQuotes, 2012”

**Algorithm**

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Custom calculation for an electric fryer below, otherwise use deemed value of 952.3 kWh for standard fryers and 2,537.9 kWh for large vat fryers.<sup>48</sup>

$$\Delta kWh = (\Delta IdleEnergy + \Delta CookingEnergy) * Days / 1,000$$

Where:

$$\begin{aligned} \Delta IdleEnergy &= (ElecIdle_{Base} * (Hours - FoodCooked/ElecPC_{Base})) - (ElecIdle_{ESTAR} * (Hours - FoodCooked/ElecPC_{ESTAR})) \\ \Delta CookingEnergy &= (FoodCooked * EFOOD_{Elec} / ElecEff_{Base}) - (FoodCooked * EFOOD_{Elec} / ElecEff_{ESTAR}) \end{aligned}$$

Where:

- $\Delta IdleEnergy$  = Difference in idle energy between baseline and efficient fryer
- $\Delta CookingEnergy$  = Difference in cooking energy between baseline and efficient fryer
- Days = Annual days of operation  
= Custom or if unknown, use 365.25 days per year
- 1,000 = Wh to kWh conversion factor
- $ElecIdle_{Base}$  = Idle energy rate of baseline electric fryer  
= 1,050 W for standard fryers and 1,350 W for large vat fryers
- $ElecIdle_{ESTAR}$  = Idle energy rate of ENERGY STAR® electric fryer  
= Custom or if unknown, use 1,000 W for standard fryers and 1,100 for large vat fryers
- Hours = Average daily hours of operation  
= Custom or if unknown, use 16 hours per day for a standard fryer and 12 hours per day for a large vat fryer
- FoodCooked = Food cooked per day  
= Custom or if unknown, use 150 pounds
- $ElecPC_{Base}$  = Production capacity of baseline electric fryer  
= 65 lb/hr for standard fryers and 100 lb/hr for large vat fryers
- $ElecPC_{ESTAR}$  = Production capacity of ENERGY STAR® electric fryer  
= Custom or if unknown, use 70 lb/hr for standard fryers and 110 lb/hr for large vat fryers
- $EFOOD_{Elec}$  = ASTM energy to food  
= 167 Wh/lb

<sup>48</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

- ElecEff<sub>Base</sub> = Cooking efficiency of baseline electric fryer  
 = 75% for standard fryers and 70% for large vat fryers
- ElecEff<sub>ESTAR</sub> = Cooking efficiency of ENERGY STAR® electric fryer  
 = Custom or if unknown, use 80% for both standard and large vat fryers

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

- $\Delta kWh$  = Electric energy savings, calculated above
- CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0001998949<sup>49</sup>

Other variables as defined above.

**NATURAL GAS ENERGY SAVINGS**

Custom calculation for a natural gas fryer below, otherwise use deemed value of 507.9 therms/yr for standard fryers and 415.1 therms/yr for large vat fryers.<sup>50</sup>

$$\Delta Therms = (\Delta IdleEnergy + \Delta CookingEnergy) * Days/100,000$$

Where:

- $\Delta IdleEnergy$  = (GasIdle<sub>Base</sub> \* (Hours – FoodCooked/GasPC<sub>Base</sub>)) – (GasIdle<sub>ESTAR</sub> \* (Hours – FoodCooked/GasPC<sub>ESTAR</sub>))
- $\Delta CookingEnergy$  = (FoodCooked \* EFOOD<sub>Gas</sub>/ GasEff<sub>Base</sub>) – (FoodCooked \* EFOOD<sub>Gas</sub>/GasEff<sub>ESTAR</sub>)

Where:

- 100,000 = Btu to therms conversion factor
- GasIdle<sub>Base</sub> = Idle energy rate of baseline gas fryer  
 = 14,000 Btu/hr for standard fryers and 16,000 Btu/hr for large vat fryers
- GasIdle<sub>ESTAR</sub> = Idle energy rate of ENERGY STAR® gas fryer  
 = Custom or if unknown, use 9,000 Btu/hr for standard fryers and 12,000 Btu/hr for large vat fryers
- GasPC<sub>Base</sub> = Production capacity of baseline gas fryer  
 = 60 lb/hr for standard fryers and 100 lb/hr for large vat fryers
- GasPC<sub>ESTAR</sub> = Production capacity of ENERGY STAR® gas fryer  
 = Custom or if unknown, use 65 lb/hr for standard fryers and 110 lb/hr for large vat fryers
- EFOOD<sub>Gas</sub> = ASTM energy to food

---

<sup>49</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Commercial Electric Cooking. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

<sup>50</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

- = 570 Btu/lb
- GasEff<sub>Base</sub> = Cooking efficiency of baseline gas fryer  
= 35% for both standard and large vat fryers
- GasEff<sub>ESTAR</sub> = Cooking efficiency of ENERGY STAR® gas fryer  
= Custom or if unknown, use 50% for both standard and large vat fryers

Other variables as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.2.5 Convection Oven

### DESCRIPTION

This measure applies to either full or half-sized electric ENERGY STAR® convection ovens and to half-sized natural gas fired ENERGY STAR® convection ovens installed in a commercial kitchen. Convection ovens are general purpose ovens that use fans to circulate hot, dry air over the food surface. ENERGY STAR® certified convection ovens are approximately 20% more efficient than standard ovens.

This measure was developed to be applicable to the following program type: TOS.

If applied to other program types, measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be an ENERGY STAR® certified convection oven meeting idle energy rate (kW or Btu/hr) and cooking efficiency (%) limits, as determined by both fuel type and oven capacity (full size versus half size).

### ENERGY STAR® Requirements (Version 2.2, Effective October 7, 2015)

| Oven Capacity | Electric Efficiency Requirements |                    | Natural Gas Efficiency Requirements |                    |
|---------------|----------------------------------|--------------------|-------------------------------------|--------------------|
|               | Idle Energy Rate                 | Cooking Efficiency | Idle Energy Rate                    | Cooking Efficiency |
| Full Size     | ≤ 1.60 kW                        | ≥ 71%              | ≤ 12,000 Btu/hr                     | ≥ 46%              |
| Half Size     | ≤ 1.00 kW                        |                    | N/A                                 | N/A                |

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new electric or natural gas convection oven that is not ENERGY STAR® certified.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>51</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure is \$0.<sup>52</sup>

### LOADSHAPE

Cooking BUS

Miscellaneous BUS (only use this loadshape for gas savings)

<sup>51</sup> Lifetime from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator, which cites reference as “FSTC research on available models, 2009”

[https://www.energystar.gov/sites/default/files/asset/document/commercial\\_kitchen\\_equipment\\_calculator.xlsx](https://www.energystar.gov/sites/default/files/asset/document/commercial_kitchen_equipment_calculator.xlsx)

<sup>52</sup> Measure cost from ENERGY STAR® which cites reference as “EPA research on available models using AutoQuotes, 2013”

---

**Algorithm**

---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Custom calculation for an electric convection oven below, otherwise use 1,938.5 kWh for full-size ovens and 192.1 kWh for half-size ovens.<sup>53</sup>

$$\Delta kWh = (\Delta IdleEnergy + \Delta CookingEnergy) * Days / 1,000$$

Where:

$$\Delta IdleEnergy = (ElecIdle_{Base} * (Hours - FoodCooked/ElecPC_{Base})) - (ElecIdle_{ESTAR} * (Hours - FoodCooked/ElecPC_{ESTAR}))$$

$$\Delta CookingEnergy = (FoodCooked * EFOOD_{Elec} / ElecEff_{Base}) - (FoodCooked * EFOOD_{Elec} / ElecEff_{ESTAR})$$

Where:

$\Delta IdleEnergy$  = Difference in idle energy between baseline and efficient convection oven

$\Delta CookingEnergy$  = Difference in cooking energy between baseline and efficient convection oven

Days = Annual days of operation  
 = Custom or if unknown, use 365.25 days per year

1,000 = Wh to kWh conversion factor

$ElecIdle_{Base}$  = Idle energy rate of baseline electric convection oven  
 = 2,000 W for full-size ovens and 1,030 W for half-size ovens

$ElecIdle_{ESTAR}$  = Idle energy rate of ENERGY STAR® electric convection oven  
 = Custom or if unknown, use 1,600 W for full-size ovens and 1,000 W for half-size ovens

Hours = Average daily hours of operation  
 = Custom or if unknown, use 12 hours per day

FoodCooked = Food cooked per day  
 = Custom or if unknown, use 100 pounds

$ElecPC_{Base}$  = Production capacity of baseline electric convection oven  
 = 90 lb/hr for full-size ovens and 45 lb/hr for half-size ovens

$ElecPC_{ESTAR}$  = Production capacity of ENERGY STAR® electric convection oven  
 = Custom or if unknown, use 90 lb/hr for full-size ovens and 50 lb/hr for half-size ovens

$EFOOD_{Elec}$  = ASTM energy to food for electric convection oven  
 = 73.2 Wh/lb

---

<sup>53</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

- $ElecEff_{Base}$  = Cooking efficiency of baseline electric convection oven  
 = 65% for full-size ovens and 68% for half-size ovens  
 $ElecEff_{ESTAR}$  = Cooking efficiency of ENERGY STAR® electric convection oven  
 = Custom or if unknown, use 71% for both full-size and half-size ovens

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

- $\Delta kWh$  = Electric energy savings, calculated above  
 $CF$  = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0001998949<sup>54</sup>

Other variables as defined above.

**NATURAL GAS ENERGY SAVINGS**

Custom calculation for a natural gas convection oven below, otherwise use deemed value of 129.4 therms/yr.<sup>55</sup>

$$\Delta Therms = (\Delta IdleEnergy + \Delta CookingEnergy) * Days / 100,000$$

Where:

- $\Delta IdleEnergy$  =  $(GasIdle_{Base} * (Hours - FoodCooked / GasPC_{Base})) - (GasIdle_{ESTAR} * (Hours - FoodCooked / GasPC_{ESTAR}))$   
 $\Delta CookingEnergy$  =  $(FoodCooked * EFOOD_{Gas} / GasEff_{Base}) - (FoodCooked * EFOOD_{Gas} / GasEff_{ESTAR})$

Where:

- 100,000 = Btu to therms conversion factor  
 $GasIdle_{Base}$  = Idle energy rate of baseline gas convection oven  
 = 15,100 Btu/hr  
 $GasIdle_{ESTAR}$  = Idle energy rate of ENERGY STAR® gas convection oven  
 = Custom or if unknown, use 12,000 Btu/hr  
 $GasPC_{Base}$  = Production capacity of baseline gas convection oven  
 = 83 lb/hr  
 $GasPC_{ESTAR}$  = Production capacity of ENERGY STAR® gas convection oven  
 = Custom or if unknown, use 86 lb/hr  
 $EFOOD_{Gas}$  = ASTM energy to food for gas convection oven

---

<sup>54</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Commercial Electric Cooking. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

<sup>55</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator



- $\text{GasEff}_{\text{Base}}$  = 250 Btu/lb
- $\text{GasEff}_{\text{Base}}$  = Cooking efficiency of baseline gas convection oven
- $\text{GasEff}_{\text{Base}}$  = 44%
- $\text{GasEff}_{\text{ESTAR}}$  = Cooking efficiency of ENERGY STAR® gas convection oven
- $\text{GasEff}_{\text{ESTAR}}$  = Custom or if unknown, use 46%

Other variables as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.2.6 Griddle

### DESCRIPTION

This measure applies to electric or natural gas fired ENERGY STAR® certified griddles installed in a commercial kitchen. ENERGY STAR® commercial griddles achieve approximately 10% higher efficiency than standard griddles with strategies such as highly conductive or reflective plate materials and improved thermostatic controls.

This measure was developed to be applicable to the following program type: TOS.

If applied to other program types, measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure the installed equipment must be a new ENERGY STAR® electric or natural gas fired griddle meeting idle energy rate limits as determined by fuel type.

**ENERGY STAR® Requirements (Version 1.2, Effective May 8, 2009 for natural gas and January 1, 2011 for electric griddles)**

| Electric Efficiency Requirements                    |                                | Natural Gas Efficiency Requirements     |                                |
|---|--------------------------------|---|--------------------------------|
| Idle Energy Rate                                    | Cooking Efficiency Consumption | Idle Energy Rate                        | Cooking Efficiency Consumption |
| $\leq 320 \text{ W/ft}^2$<br>$\leq 1.00 \text{ kW}$ | Reported                       | $\leq 2,650 \text{ Btu/hr/ft}^2$<br>N/A | Reported                       |

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new electric or natural gas fired griddle that is not ENERGY STAR® certified.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>56</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure is \$0 for an electric griddle and \$360 for a gas griddle.<sup>57</sup>

### LOADSHAPE

Cooking BUS

Miscellaneous BUS (only use this loadshape for gas savings)

---

<sup>56</sup> Lifetime from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator, which cites reference as “FSTC research on available models, 2009”

[http://www.energystar.gov/buildings/sites/default/uploads/files/commercial\\_kitchen\\_equipment\\_calculator.xlsx](http://www.energystar.gov/buildings/sites/default/uploads/files/commercial_kitchen_equipment_calculator.xlsx)

<sup>57</sup> Measure costs from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator, which cites reference as “EPA research on available models using AutoQuotes, 2012”

[http://www.energystar.gov/index.cfm?fuseaction=find\\_a\\_product.showProductGroup&pgw\\_code=COG](http://www.energystar.gov/index.cfm?fuseaction=find_a_product.showProductGroup&pgw_code=COG)

---

**Algorithm**

---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Custom calculation for an electric griddle below, otherwise use deemed value of 1,910.4 kWh.<sup>58</sup>

$$\Delta kWh = (\Delta IdleEnergy + \Delta CookingEnergy) * Days / 1,000$$

Where:

$$\begin{aligned} \Delta IdleEnergy &= [(ElecIdle_{Base} * Width * Depth) * (Hours - FoodCooked/ElecPC_{Base})] - \\ & \quad [(ElecIdle_{ESTAR} * Width * Depth) * (Hours - FoodCooked/ElecPC_{ESTAR})] \\ \Delta CookingEnergy &= (FoodCooked * EFOOD_{Elec} / ElecEff_{Base}) - (FoodCooked * EFOOD_{Elec} / \\ & \quad ElecEff_{ESTAR}) \end{aligned}$$

Where:

- $\Delta IdleEnergy$  = Difference in idle energy between baseline and efficient griddle
- $\Delta CookingEnergy$  = Difference in cooking energy between baseline and efficient griddle
- Days = Annual days of operation  
= Custom or if unknown, use 365.25 days per year
- 1,000 = Wh to kWh conversion factor
- $ElecIdle_{Base}$  = Idle energy rate of baseline electric griddle  
= 400 W/ft<sup>2</sup>
- $ElecRate_{ESTAR}$  = Idle energy rate of ENERGY STAR® electric griddle  
= Custom or if unknown, use 320 W/ft<sup>2</sup>
- Width = Griddle width  
= Custom or if unknown, use 3 feet
- Depth = Griddle depth  
= Custom or if unknown, use 2 feet
- Hours = Average daily hours of operation  
= Custom or if unknown, use 12 hours per day
- FoodCooked = Food cooked per day  
= Custom or if unknown, use 100 pounds
- $ElecPC_{Base}$  = Production capacity of baseline electric griddle  
= 35 lb/hr
- $ElecPC_{ESTAR}$  = Production capacity of ENERGY STAR® electric griddle  
= Custom or if unknown, use 40 lb/hr
- $EFOOD_{Elec}$  = ASTM energy to food

---

<sup>58</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

|                          |  |
|--------------------------|--|
|                          | = 139 Wh/lb  |
| ElecEff <sub>Base</sub>  | = Cooking efficiency of baseline electric griddle<br>= 65%                               |
| ElecEff <sub>ESTAR</sub> | = Cooking efficiency of ENERGY STAR® electric griddle<br>= Custom or if unknown, use 70% |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

|              |   |
|--------------|---|
| $\Delta kWh$ | = Electric energy savings, calculated above   |
| CF           | = Summer peak coincidence demand (kW) to annual energy (kWh) factor<br>= 0.0001998949 <sup>59</sup> |

Other variables as defined above.

**NATURAL GAS ENERGY SAVINGS**

Custom calculation for a natural gas griddle below, otherwise use deemed value of 131.4 therms.<sup>60</sup>

$$\Delta Therms = (\Delta IdleEnergy + \Delta CookingEnergy) * Days / 100,000$$

Where:

|                        |   |
|------------------------|---|
| $\Delta IdleEnergy$    | = [GasIdle <sub>Base</sub> * (Width * Depth) * (Hours – FoodCooked/GasPC <sub>Base</sub> )] – [GasIdle <sub>ESTAR</sub> * (Width * Depth) * (Hours – FoodCooked/GasPC <sub>ESTAR</sub> )] |
| $\Delta CookingEnergy$ | = (FoodCooked * EFOOD <sub>Gas</sub> / GasEff <sub>Base</sub> ) – (FoodCooked * EFOOD <sub>Gas</sub> / GasEff <sub>ESTAR</sub> )  |

Where:

|                          |  |
|--------------------------|--|
| 100,000                  | = Btu to therms conversion factor  |
| GasIdle <sub>Base</sub>  | = Idle energy rate of baseline gas griddle<br>= 3,500 Btu/hr/ft <sup>2</sup>                               |
| GasIdle <sub>ESTAR</sub> | = Idle energy rate of ENERGY STAR® gas griddle<br>= Custom or if unknown, use 2,650 Btu/hr/ft <sup>2</sup> |
| GasPC <sub>Base</sub>    | = Production capacity of baseline gas griddle<br>= 25 lb/hr  |
| GasPC <sub>ESTAR</sub>   | = Production capacity of ENERGY STAR® gas griddle<br>= Custom or if unknown, use 45 lb/hr                  |
| EFOOD <sub>Gas</sub>     | = ASTM energy to food<br>= 475 Btu/lb  |

---

<sup>59</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Commercial Electric Cooking. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

<sup>60</sup> Algorithms and assumptions derived from ENERGY STAR® Commercial Kitchen Equipment Savings Calculator

GasEff<sub>Base</sub> = Cooking efficiency of baseline gas griddle  
= 32%

GasEff<sub>ESTAR</sub> = Cooking efficiency of ENERGY STAR® gas griddle  
= Custom or if unknown, use 38%

Other variables as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.2.7 Infrared Charbroiler

### DESCRIPTION

This measure applies to new natural gas fired charbroilers that utilize infrared burners installed in a commercial kitchen. Charbroilers cook food in a grid placed over a radiant heat source. Infrared broilers move heat faster and carry a higher heat intensity than non-infrared broilers.

This measure was developed to be applicable to the following program types: TOS.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a new natural gas charbroiler with infrared burners and an efficiency rating that meets the minimum standards according to utility program requirements.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new natural gas charbroiler without infrared burners.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>61</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure is \$2,200.<sup>62</sup>

### LOADSHAPE

Miscellaneous BUS

---

### Algorithm

---

#### CALCULATION OF SAVINGS

##### ELECTRIC ENERGY SAVINGS

N/A

##### SUMMER COINCIDENT PEAK DEMAND SAVINGS

N/A

##### NATURAL GAS ENERGY SAVINGS

Custom calculation is shown below, followed by a table of default values that may be used when a given variable is unknown.

$$\Delta Therms = (\Delta PreheatEnergy + \Delta CookingEnergy) * Days / 100,000$$

---

<sup>61</sup> Lifetime recognized by the Food Service Technology Center, as indicated in the online Gas Broiler Life-Cycle Cost Calculator.

<sup>62</sup> Nicor Gas Energy Efficiency Plan 2011-2014. Revised Plan Filed Pursuant to Order Docket 10-0562

Where:

- $\Delta$ PreheatEnergy = Difference in preheating energy between baseline and infrared charbroiler  
= NoPreheats \* (Preheat<sub>Base</sub> – Preheat<sub>EE</sub>)
- $\Delta$ CookingEnergy = Difference in cooking energy between baseline and infrared charbroiler  
= (InputRate<sub>Base</sub> - InputRate<sub>EE</sub>) \* Hours
- Days = Annual days of operation
- 100,000 = Btu to therms conversion factor
- NoPreheats = Number of preheats per day
- Preheat<sub>Base</sub> = Preheat energy requirement of baseline charbroiler [Btu]
- Preheat<sub>EE</sub> = Preheat energy requirement of infrared charbroiler [Btu]
- InputRate<sub>Base</sub> = Cooking energy input rate of baseline charbroiler [Btu/hr]
- InputRate<sub>EE</sub> = Cooking energy input rate of infrared charbroiler [Btu/hr]
- Hours = Total average daily hours of operation minus 0.3 hours to account for preheating time [hr]. E.g. if the charbroiler is on average turned on at 12PM and shut off at 12AM, (12 – 0.3) or 11.7 hours is used in the algorithm.

In instances where site specific information is unavailable for any given variable, the following default values (based on charbroiler width) may be used.<sup>63</sup> In instances where all defaults are used, the resulting savings are shown as Default in the table below.

| Variable                  | Charbroiler Width |               |                |                |                |
|---------------------------|-------------------|---------------|----------------|----------------|----------------|
|                           | 2 Foot            | 3 Foot        | 4 Foot         | 5 Foot         | 6 Foot         |
| Days                      | 365.25            | 365.25        | 365.25         | 365.25         | 365.25         |
| Preheat <sub>Base</sub>   | 32,000 Btu        | 48,000 Btu    | 64,000 Btu     | 80,000 Btu     | 96,000 Btu     |
| Preheat <sub>ESTAR</sub>  | 27,000 Btu        | 40,500 Btu    | 54,000 Btu     | 67,500 Btu     | 81,000 Btu     |
| NoPreheats                | 1                 | 1             | 1              | 1              | 1              |
| InputRate <sub>Base</sub> | 64,000 Btu/hr     | 96,000 Btu/hr | 128,000 Btu/hr | 160,000 Btu/hr | 192,000 Btu/hr |
| InputRate <sub>EE</sub>   | 48,000 Btu/hr     | 72,000 Btu/hr | 96,000 Btu/hr  | 120,000 Btu/hr | 144,000 Btu/hr |
| Hours                     | 11.7 hr/day       | 11.7 hr/day   | 11.7 hr/day    | 11.7 hr/day    | 11.7 hr/day    |
| Default                   | 702.0 therms      | 1053.0 therms | 1404.0 therms  | 1755.0 therms  | 2106.0 therms  |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

<sup>63</sup> Default values based on the Food Service Technology Center’s online Gas Broiler Life-Cycle Cost Calculator.

## 2.2.8 Infrared Rotisserie Oven

### DESCRIPTION

This measure applies to new natural gas fired high efficiency rotisserie ovens utilizing infrared burners and installed in a commercial kitchen. Rotisserie ovens are designed for batch cooking, with individual spits arranged on a rotating wheel or drum within an enclosed cooking cavity. Infrared ovens move heat faster and carry a higher heat intensity than non-infrared ovens.

This measure was developed to be applicable to the following program types: TOS.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a new natural gas rotisserie oven with infrared burners and an efficiency rating that meets the minimum standards according to utility program requirements.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new natural gas rotisserie oven without infrared burners.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>64</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure is \$2,700.<sup>65</sup>

### LOADSHAPE

Miscellaneous BUS

---

### Algorithm

---

### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

N/A

#### SUMMER COINCIDENT PEAK DEMAND SAVINGS

N/A

#### NATURAL GAS ENERGY SAVINGS

Custom calculation is shown below. In instances where site specific information is unavailable for any given variable, the following default values may be used. In instances where all defaults are used, the resulting savings are 187.2 therms annually.

---

<sup>64</sup>Measure life consistent with other food service equipment lifetimes as reported by the Food Service Technology Center.

<sup>65</sup>Incremental cost from Nicor Gas Energy Efficiency Plan 2011-2014. Revised Plan Filed Pursuant to Order Docket 10-0562, May 27, 2011



$$\Delta Therms = \frac{InputRate_{EE}}{3} * Duty * Hours / 100,000$$

Where:

InputRate<sub>EE</sub> = Energy input rate of infrared rotisserie oven (Btu/hr)  
 = Custom or if unknown, use 37,500 Btu/hr<sup>66</sup>

*Note: the difference between baseline and efficient energy input rates can be simplified when efficient rotisseries are assumed to have 75% of the energy input requirement as baseline. If InputRate<sub>BASE</sub> = InputRate<sub>EE</sub> / .75 then the term becomes [(InputRate<sub>EE</sub> / .75) - InputRate<sub>EE</sub>] which can be factored and simplified to [InputRate<sub>EE</sub> / 3]*

Duty = Duty cycle of rotisserie oven (%)  
 = Custom or if unknown, use 60%<sup>67</sup>

Hours = Typical annual operating hours of rotisserie oven  
 = Custom or if unknown, use 2,496 hours<sup>68</sup>

100,000 = Btu to therms conversion factor

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>66</sup> Infrared energy input rate calculated based on baseline energy input rate of 50,000 Btu/hr, the median rated energy input for rotisserie ovens from FSTC Oven Technology Assessment, Table 7.2. Input energy rates of infrared rotisseries are assumed to be 75% of that of baseline, consistent with infrared charbroilers.

<sup>67</sup> Duty cycle from Food Service Technology Center Oven Technical Assessment, Table 7.2

<sup>68</sup> Typical operating hours based on oven operating schedule of 8 hours per day, 6 days per week, 52 weeks per year, provided in Food Service Technology Center Oven Technical Assessment, Table 7.2

## 2.2.9 Kitchen Demand Ventilation Controls

### DESCRIPTION

This measure related to the installation of commercial kitchen demand ventilation controls that vary the kitchen ventilation exhaust and make-up airflow based on cooking load and/or time of day.

This measure was developed to be applicable to the following program types: TOS, RF. For TOS applications, ASHRAE 90.1 and local codes should be applied to situations where hood exhaust rates exceed 5,000 cfm. If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure the installed equipment must be a control system that varies the exhaust rate of kitchen ventilation (exhaust and makeup air fans) based on the energy and effluent output from the cooking appliances (i.e., the more heat and smoke/vapors generated, the more ventilation needed). This involves installing a new temperature sensor in the hood exhaust collar and/or an optic sensor on the end of the hood that sense cooking conditions which allows the system to automatically vary the rate of exhaust to what is needed by adjusting the fan speed accordingly.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is kitchen ventilation system that has constant speed, continuously operating ventilation motor(s).

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 15 years.<sup>69</sup>

### DEEMED MEASURE COST

The capital cost for this measure is proportional to the rated horsepower of the exhaust motor(s), based on installation classification:

$$\text{Measure Cost} = \text{HP}_{\text{exhaust}} * \text{Cost}_{\text{HP}}$$

Where:

$\text{HP}_{\text{exhaust}}$  = total rated horsepower of the exhaust motor(s)

$\text{Cost}_{\text{HP}}$  = cost per horsepower as listed in the table below

| Measure Category | Incremental Cost <sup>70</sup> , \$/HP |
|------------------|--|
| Retrofit         | \$1,988                                |
| Time of Sale     | \$994                                  |

### LOADSHAPE

Cooking BUS

Miscellaneous BUS (only use this loadshape for gas savings)

---

<sup>69</sup> Pacific Gas & Electric Company Work Paper PGECOFST116 Demand Ventilation Controls Revision # 1, June 1, 2009.

<sup>70</sup> Pacific Gas & Electric Company Work Paper PGECOFST116 Demand Ventilation Controls Revision # 1, June 1, 2009.

**Algorithm**

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Fan energy savings:

$$\Delta kWh = HP_{\text{exhaust}} * (0.76 \text{ kW/HP}^{71}) * \text{Hours} * \text{Days}$$

Where:

Hours = Average daily hours of operation. If unknown, assume 12 hours.

Days = Annual days of operation. If unknown assume 365.25 days.

*Other variables as defined above.*

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

$\Delta kWh$  = Electric energy savings, calculated above

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor

**= 0.000199894979 NATURAL GAS ENERGY SAVINGS**

For applications where 100% make-up air is tempered, annual gas savings attributed to heating can be estimated as:

$$\Delta \text{Therms} = \text{CFM} * HP_{\text{exhaust}} * \text{Hours}/24 * Q * /(\text{Eff}_{\text{heat}} * 100,000)$$

Where:

CFM = average airflow reduction for the system, per rated horsepower of exhaust motor(s).

= custom input, or 448 cfm/HP<sup>72</sup> if unknown.

Q = Annual heating energy required (tabulated values represent continuous operation) to heat kitchen make-up air, Btu/cfm dependent on location<sup>73</sup>:

| Zone           | Q, Btu/cfm |
|----------------|------------|
| Fort Madison   | 136,416    |
| Lincoln        | 152,258    |
| Cape Girardeau | 116,666    |
| Kaiser         | 119,824    |
| Knob Noster    | 124,716    |
| Kansas City    | 140,920    |
| St Louis       | 125,363    |

<sup>71</sup> Normalized demand savings per rated HP of exhaust motor. Pacific Gas & Electric Company Work Paper PGECOFST116 Demand Ventilation Controls Revision # 1, June 1, 2009

<sup>72</sup> Based on data presented in Pacific Gas & Electric Company Work Paper PGECOFST116 Demand Ventilation Controls Revision # 1, June 1, 2009. See workbook KDVC.xlsx for derivation.

<sup>73</sup> Assuming a base temperature of 65. It is assumed that kitchens often separate dedicated 100% outdoor air make up units and kitchen staff prefer to have outside air heated to 65 degrees. See workbook KDVC.xlsx for derivation.

$Eff_{\text{heat}}$  = Heating efficiency of unit supplying make-up air.  
= actual if known, otherwise assume 80%<sup>74</sup>

100,000 = conversion from Btu to Therm

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>74</sup> IECC code minimum thermal efficiency requirements for a warm air duct furnace.

## 2.2.10 Rack Oven

### DESCRIPTION

This measure applies to natural gas fired ENERGY STAR® certified rack oven (either single or double rack) installed in a commercial kitchen.

This measure was developed to be applicable to the following program types: TOS.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be an ENERGY STAR® certified gas rack oven meeting idle energy rate (Btu/hr) and baking-energy efficiency (%) qualification criteria, as determined by oven capacity.

### ENERGY STAR® Requirements (Version 2.2, Effective October 7, 2015)

| Oven Capacity | Total Energy Idle Energy | Baking-Energy Efficiency |
|---------------|--------------------------|--------------------------|
| Single Rack   | ≤ 25,000 Btu/hr          | ≥ 48%                    |
| Double Rack   | ≤ 30,000 Btu/hr          | ≥ 52%                    |

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new natural gas rack oven that is not ENERGY STAR® certified.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>75</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure is \$4933.00 for a single rack oven and \$5187.00 for a double rack.<sup>76</sup>

### LOADSHAPE

Miscellaneous BUS

---

## Algorithm

---

### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

N/A<sup>77</sup>

---

<sup>75</sup> Lifetime recognized by the Food Service Technology Center, as indicated in the online Gas Rack Oven Life-Cycle Cost Calculator.

<sup>76</sup> Pacific Gas and Electric Company workpaper PGECOFST109, Commercial Rack Ovens, Food Service Equipment Workpaper June 1, 2009.

<sup>77</sup> ENERGY STAR® and the Food Service Technology Center do not yet rate or certify electric rack ovens.

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

Custom calculation is shown below, followed by a table of default values that may be used when a given variable is unknown.

$$\Delta Therms = (\Delta PreheatEnergy + \Delta IdleEnergy + \Delta CookingEnergy) * Days/100,000$$

Where:

- $\Delta PreheatEnergy$  = NoPreheats \* (Preheat<sub>Base</sub> – Preheat<sub>ESTAR</sub>)
- $\Delta IdleEnergy$  = (GasIdle<sub>Base</sub>\* (Hours - FoodCooked/GasPC<sub>Base</sub>)) - (GasIdle<sub>ESTAR</sub> \* (Hours -FoodCooked/GasPC<sub>ESTAR</sub>))
- $\Delta CookingEnergy$  = FoodCooked \* EFOOD<sub>Gas</sub> \* (1/ GasEff<sub>Base</sub> - 1/ GasEff<sub>ESTAR</sub>)

Where:

- $\Delta PreheatEnergy$  = Difference in preheating energy between baseline and efficient rack oven
- $\Delta IdleEnergy$  = Difference in idle energy between baseline and efficient rack oven
- $\Delta CookingEnergy$  = Difference in heavy-load cooking energy between baseline and efficient rack oven
- Days = Annual days of operation
- 100,000 = Btu to therms conversion factor
- NoPreheats = Number of preheats per day
- Preheat<sub>Base</sub> = Preheat energy requirement of baseline rack oven [Btu]
- Preheat<sub>ESTAR</sub> = Preheat energy requirement of efficient rack oven [Btu]
- GasIdle<sub>Base</sub> = Idle energy rate of baseline gas rack oven [Btu/hr]
- GasIdle<sub>ESTAR</sub> = Idle energy rate of ENERGY STAR® gas rack oven [Btu/hr]
- Hours = Average daily hours of operation [hr]
- GasPC<sub>Base</sub> = Production capacity of baseline gas rack oven [lbs/hr]
- GasPC<sub>ESTAR</sub> = Production capacity of ENERGY STAR® gas rack oven [lbs/hr]
- FoodCooked = Mass of food cooked daily in the rack oven [lbs]
- EFOOD<sub>Gas</sub> = Energy transfer to food for gas rack oven  
= 226 Btu/lbs<sup>78</sup>
- GasEff<sub>Base</sub> = Heavy-load cooking efficiency of baseline gas rack oven [%]
- GasEff<sub>ESTAR</sub> = Heavy-load cooking efficiency of ENERGY STAR® gas rack oven [%]

---

<sup>78</sup> Calibrated value to give results consistent with the Food Service Technology Center’s online Gas Rack Oven Life-Cycle Cost Calculator. This value is consistent with values found by FSTC experimental testing and values recognized by ENERGY STAR®.

In instances where site specific information is unavailable for any given variable, the following default values may be used.<sup>79</sup> In instances where all defaults are used, the resulting savings are 1096.4 therms and 2315.8 therms for single rack and double rack ovens respectively.

| Variable                 | Single Rack   | Double Rack   |
|--------------------------|---------------|---------------|
| Days                     | 365.25        | 365.25        |
| Preheat <sub>Base</sub>  | 50,000 Btu    | 100,000 Btu   |
| Preheat <sub>ESTAR</sub> | 44,000 Btu    | 85,000 Btu    |
| NoPreheats               | 1             | 1             |
| GasIdle <sub>Base</sub>  | 43,000 Btu/hr | 65,000 Btu/hr |
| GasIdle <sub>ESTAR</sub> | 25,000 Btu/hr | 30,000 Btu/hr |
| Hours                    | 12 hr/day     | 12 hr/day     |
| GasPC <sub>Base</sub>    | 130 lb/hr     | 250 lb/day    |
| GasPC <sub>ESTAR</sub>   | 140 lb/hr     | 280 lb/day    |
| FoodCooked               | 600 lb/day    | 1200 lb/day   |
| GasEff <sub>Base</sub>   | 30%           | 30%           |
| GasEff <sub>ESTAR</sub>  | 48%           | 52%           |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>79</sup> Default values based on the Food Service Technology Center’s online Gas Rack Oven Life-Cycle Cost Calculator.

## 2.2.11 Infrared Salamander Broiler

### DESCRIPTION

This measure applies to new natural gas fired high efficiency salamander broilers utilizing infrared burners installed in a commercial kitchen. Salamander broilers are medium-input overfired broilers that are typically mounted on the backshelf of a range. Infrared broilers move heat faster and carry a higher heat intensity than non-infrared broilers.

This measure was developed to be applicable to the following program types: TOS.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a new natural gas fired salamander broiler with infrared burners and an efficiency rating that meets the minimum standards according to utility program requirements.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new natural gas fired salamander broiler without infrared burners.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>80</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure is \$1,000.<sup>81</sup>

### LOADSHAPE

Miscellaneous BUS

---

---

### Algorithm

---

---

### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

N/A

#### SUMMER COINCIDENT PEAK DEMAND SAVINGS

N/A

---

<sup>80</sup>Measure life consistent with other food service equipment lifetimes as reported by the Food Service Technology Center.

<sup>81</sup> Incremental cost from Nicor Gas Energy Efficiency Plan 2011-2014. Revised Plan Filed Pursuant to Order Docket 10-0562, May 27, 2011



**NATURAL GAS ENERGY SAVINGS**

Custom calculation is shown below. In instances where site specific information is unavailable for any given variable, the following default values may be used. In instances where all defaults are used, the resulting savings are 168.2 therms annually.

$$\Delta Therms = \frac{InputRate_{EE}}{3} * Duty * Hours / 100,000$$

Where:

InputRate<sub>EE</sub> = Rated energy input rate of infrared salamander broiler (Btu/hr)  
 = Custom or if unknown, use 28,875 Btu/hr<sup>82</sup>

*Note: the difference between baseline and efficient energy input rates can be simplified when efficient salamander broilers are assumed to have 75% of the energy input requirement as baseline. If InputRate<sub>BASE</sub> = InputRate<sub>EE</sub> / .75 then the term becomes [(InputRate<sub>EE</sub> / .75) - InputRate<sub>EE</sub>] which can be factored and simplified to [InputRate<sub>EE</sub> / 3]*

Duty = Duty cycle of salamander broiler (%)  
 = Custom or if unknown, use 70%<sup>83</sup>  
 Hours = Typical operating hours of salamander broiler  
 = Custom or if unknown, use 2,496 hours<sup>84</sup>  
 100,000 = Btu to therms conversion factor

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>82</sup> Infrared energy input rate calculated based on baseline energy input rate of 38,500 Btu/hr, the median rated energy input for salamander broilers from FSTC Broiler Technology Assessment, Table 4.3. Input energy rates of infrared salamander broilers are assumed to be 75% of that of baseline, consistent with infrared charbroilers.

<sup>83</sup> Duty cycle from Food Service Technology Center Broiler Technical Assessment, Table 4.3

<sup>84</sup> Typical operating hours based on broiler operating schedule of 8 hours per day, 6 days per week, 52 weeks per year, provided in Food Service Technology Center Broiler Technical Assessment, Table 4.3

## 2.2.12 Pre-Rinse Spray Valve

### DESCRIPTION

Pre-rinse valves use a spray of water to remove food waste from dishes prior to cleaning in a dishwasher. More efficient spray valves use less water, thereby reducing water consumption, water heating cost, and waste water (sewer) charges. Pre-rinse spray valves include a nozzle, squeeze lever, and dish guard bumper. The primary impacts of this measure are water savings. Reduced hot water consumption saves either natural gas or electricity, depending on the type of energy the hot water heater uses.

This measure was developed to be applicable to the following program types: TOS, RF, and DI. If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the new or replacement pre-rinse spray nozzle must use less than 1.6 gallons per minute.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment will vary based on the delivery method and is defined below:

| Time of Sale   | Retrofit, Direct Install   |
|--|--|
| The baseline equipment is assumed to be 1.6 gallons per minute. The Energy Policy Act (EPA) of 2005 sets the maximum flow rate for pre-rinse spray valves at 1.6 gallons per minute at 60 pounds per square inch of water pressure when tested in accordance with ASTM F2324-03. This performance standard went into effect January 1, 2006. | Actual existing flow rates should be used when possible. If unknown, baseline can be assumed to be 2.23 gallons per minute. <sup>85</sup> If existing pre-rinse spray valve flow rate is unknown, then existing pre-rinse spray valve must have been installed prior to 2006. The Energy Policy Act (EPA) of 2005 sets the maximum flow rate for pre-rinse spray valves at 1.6 gallons per minute at 60 pounds per square inch of water pressure when tested in accordance with ASTM F2324-03. This performance standard went into effect January 1, 2006. However, field data shows that not all nozzles in use have been replaced with the newer flow rate nozzle. Products predating this standard can use up to five gallons per minute. |

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 5 years.<sup>86</sup>

### DEEMED MEASURE COST

When available, the actual cost of the measure should be used. If unknown, a default value of \$92.90<sup>87</sup> may be assumed.

### LOADSHAPE

Water Heating BUS

<sup>85</sup> Verification measurements taken at 195 installations showed average pre flowrates of 2.23 gallons per minute. IMPACT AND PROCESS EVALUATION FINAL REPORT for CALIFORNIA URBAN WATER CONSERVATION COUNCIL 2004-5 PRE-RINSE SPRAY VALVE INSTALLATION PROGRAM (PHASE 2) (PG&E Program # 1198-04; SoCalGas Program 1200-04) (“CUWCC Report”, Feb 2007)

<sup>86</sup> Consistent with Ameren Missouri and KCPL TRM assumptions.

<sup>87</sup> Average of costs recognized by Ameren Missouri (\$85.8) and KCPL (\$100).

---

**Algorithm**

---

**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS (NOTE WATER SAVINGS MUST FIRST BE CALCULATED)**

$$\Delta kWh = \Delta Gallons * 8.33 * 1 * (Tout - Tin) * (1/EFF\_Elec) / 3,413$$

Where:

- $\Delta Gallons$  = amount of water saved as calculated below in Water Impact Calculation
- 8.33 = specific mass in pounds of one gallon of water (lbm/gal)
- 1 = Specific heat of water: 1 Btu/lbm/°F
- Tout = Water Heater Outlet Water Temperature  
= custom, otherwise assume Tin + 70°F temperature rise from Tin<sup>88</sup>
- Tin = Inlet Water Temperature  
= custom, otherwise assume 57.9F<sup>89</sup>
- EFF\_Elec = Efficiency of electric water heater supplying hot water to pre-rinse spray valve  
= custom, otherwise assume 97%<sup>90</sup>

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

- $\Delta kWh$  = Electric energy savings, calculated above
- CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
= 0.0001998949<sup>91</sup>

**NATURAL GAS ENERGY SAVINGS**

$$\Delta Therms = \Delta Gallons * 8.33 * 1 * (Tout - Tin) * (1/EFF\_Gas) / 100,000$$

Where (new variables only):

- EFF\_Gas = Efficiency of gas water heater supplying hot water to pre-rinse spray valve  
= custom, otherwise assume 80%<sup>92</sup>

---

<sup>88</sup>If unknown, assume a 70 degree temperature rise from Tin per Food Service Technology Center calculator assumptions to account for variations in mixing and water heater efficiencies

<sup>89</sup> Using 40" deep soil temp as a proxy at Powell Gardens SCAN site. Average by month of available data from 3/28/02–10/11/14: 12 month average is 57.898. <http://www.wcc.nrcs.usda.gov/nwcc/site?sitenum=2061>

<sup>90</sup>This efficiency value is based on IECC 2012/2015 performance requirement for electric resistant water heaters rounded without the slight adjustment allowing for reduction based on size of storage tank.

<sup>91</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Commercial Electric Cooking. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

<sup>92</sup> IECC 2012/2015, Table C404.2, Minimum Performance of Water-Heating Equipment

**WATER IMPACT CALCULATION**

$$\Delta\text{Gallons} = (\text{FLO}_{\text{base}} - \text{FLO}_{\text{eff}}) * 60 * \text{HOURS}_{\text{day}} * \text{DAYS}_{\text{year}}$$

Where:

**FLO<sub>base</sub>** = Base case flow in gallons per minute (Gal/min). Use actual when appropriate if available, otherwise assume:

| Time of Sale              | Retrofit, Direct Install   |
|---------------------------|----------------------------|
| 1.6 gal/min <sup>93</sup> | 2.23 gal/min <sup>94</sup> |

**FLO<sub>eff</sub>** = Efficient case flow in gallons per minute (Gal/min). Use actual flow rate of installed equipment if known, otherwise assume:

| Time of Sale               | Retrofit, Direct Install   |
|----------------------------|----------------------------|
| 1.06 gal/min <sup>95</sup> | 1.06 gal/min <sup>96</sup> |

**60** = Minutes per hour

**HOURS<sub>day</sub>** = Hours per day that the pre-rinse spray valve is used at the site, custom, otherwise<sup>97</sup>:

| Application                                       | Hours/day |
|---|-----------|
| Small, quick- service restaurants                 | 1         |
| Medium-sized casual dining restaurants            | 1.5       |
| Large institutional establishments with cafeteria | 3         |

**DAYS<sub>year</sub>** = Days per year pre-rinse spray valve is used at the site, custom, otherwise 312 days/yr based on assumed 6 days/wk x 52 wk/yr = 312 day/yr.

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

<sup>93</sup>The baseline equipment is assumed to be 1.6 gallons per minute. The Energy Policy Act (EPA) of 2005 sets the maximum flow rate for pre-rinse spray valves at 1.6 gallons per minute at 60 pounds per square inch of water pressure when tested in accordance with ASTM F2324-03. This performance standard went into effect January 1, 2006. [www1.eere.energy.gov/femp/pdfs/spec\\_prerinsesprayvavles.pdf](http://www1.eere.energy.gov/femp/pdfs/spec_prerinsesprayvavles.pdf).

<sup>94</sup> Verification measurements taken at 195 installations showed average pre flowrates of 2.23 gallons per minute. IMPACT AND PROCESS EVALUATION FINAL REPORT for CALIFORNIA URBAN WATER CONSERVATION COUNCIL 2004-5 PRE-RINSE SPRAY VALVE INSTALLATION PROGRAM (PHASE 2) (PG&E Program # 1198-04; SoCalGas Program 1200-04) (“CUWCC Report”, Feb 2007)

<sup>95</sup>1.6 gallons per minute used to be the high efficiency flow, but more efficient spray valves are available ranging down to 0.64 gallons per minute per Federal Energy Management Program which references the Food Services Technology Center web site with the added note that even more efficient models may be available since publishing the data. The average of the nozzles listed on the FSTC website is 1.06.

<sup>96</sup>1.6 gallons per minute used to be the high efficiency flow, but more efficient spray valves are available ranging down to 0.64 gallons per minute per Federal Energy Management Program which references the Food Services Technology Center web site with the added note that even more efficient models may be available since publishing the data. The average of the nozzles listed on the FSTC website is 1.06.

<sup>97</sup> Hours primarily based on PG& E savings estimates, algorithms, sources (2005), Food Service Pre-Rinse Spray Valves.

## 2.3 Hot Water End Use

### 2.3.1 Water Heater

#### DESCRIPTION

This measure applies to the purchase and installation of a new gas-fired storage or tankless water heater meeting program efficiency requirements in place of a unit meeting minimum federal standards, in a commercial building.

This measure was developed to be applicable to the following program types: TOS, NC.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a new gas-fired storage or tankless water heater meeting program efficiency requirements.

#### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is assumed to be a new, gas-fired storage or tankless water heater meeting the minimum federal efficiency standards.<sup>98</sup>

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 13 years for a gas storage water heater and 20 years for a gas tankless water heater.<sup>99</sup>

#### DEEMED MEASURE COST

The full install cost and incremental capital cost for this measure is dependent on the type of water heater, as listed below.<sup>100</sup> Actual costs should be used where available.

| Equipment Type   | Category  | Full Install Cost | Incremental Cost |
|--|-----------|-------------------|------------------|
| Gas Storage Water Heaters<br>≤ 75,000 Btu/hr, ≥20 gal and<br>≤55 gal | Baseline  | \$799             | N/A              |
|  | Efficient | \$1,055           | \$256            |
| Gas Storage Water Heaters<br>> 75,000 Btu/hr                         | 0.80 Et   | \$4,886           | N/A              |
|  | 0.83 Et   | \$5,106           | \$220            |
|  | 0.84 Et   | \$5,299           | \$413            |
|  | 0.85 Et   | \$5,415           | \$529            |
|  | 0.86 Et   | \$5,532           | \$646            |
|  | 0.87 Et   | \$5,648           | \$762            |
|  | 0.88 Et   | \$5,765           | \$879            |
|  | 0.89 Et   | \$5,882           | \$996            |
|  | 0.90 Et   | \$6,021           | \$1,135          |
|  | Baseline  | \$593             | N/A              |

<sup>98</sup> Federal standards for ≤75,000 Btu/hr storage water heaters and <200,000 Btu/hr tankless water heaters are from 10 CFR §430.32(d). All other standards are from 10 CFR §431.110.

<sup>99</sup> Database for Energy-Efficiency Resources (DEER), “DEER2014 EUL Table Update,” California Public Utilities Commission, February 4, 2014. Lifetime for gas storage heaters is average of lifetimes for commercial and residential storage water heaters.

<sup>100</sup> Cost information is based upon data from “2010-2012 WA017 Ex Ante Measure Cost Study Draft Report”, Itron, February 28, 2014. See “NR HW Heater\_WA017\_MCS Results Matrix - Volume I\_August2016.xls” for more information.

| Equipment Type   | Category  | Full Install Cost | Incremental Cost |
|--|-----------|-------------------|------------------|
| Gas Tankless Water Heaters<br>>50,000 Btu/hr and <200,000 Btu/hr | Efficient | \$1,103           | \$510            |
| Gas Tankless Water Heaters<br>≥200,000 Btu/hr                    | Baseline  | \$1,148           | N/A              |
|  | Efficient | \$1,427           | \$278            |

**LOADSHAPE**

Water Heating BUS

---



---

**Algorithm**

---



---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

$$\Delta Therms = (1/EF_{Base} - 1/EF_{EE}) * (HotWaterUse_{Gallon} * \gamma_{Water} * (T_{Out} - T_{In}) * 1.0) / 100,000$$

Where:

EF<sub>Base</sub> = Efficiency of baseline water heater according to federal standards, expressed as Energy Factor (EF) or Thermal Efficiency (E<sub>t</sub>)

= See table below

| Equipment Type   | Size Category                     | Federal Standard Minimum Efficiency                  |
|--|-----------------------------------|--|
| Gas Storage Water Heaters<br>≤ 75,000 Btu/hr                     | ≥20 gal and ≤55 gal               | 0.675 – (0.0015 * Rated Storage Volume in Gallons)   |
|  | >55 gal and ≤100 gal              | 0.8012 – (0.00078 * Rated Storage Volume in Gallons) |
| Gas Storage Water Heaters<br>> 75,000 Btu/hr                     | < 4000 Btu/h/gal                  | 80% E <sub>t</sub><br>Standby Loss: (Q/800 + 110√V)  |
| Gas Tankless Water Heaters<br>>50,000 Btu/hr and <200,000 Btu/hr | < 4000 Btu/h/gal and <2 gal tank  | 0.82 – (0.0019 * Rated Storage Volume in Gallons)    |
| Gas Tankless Water Heaters<br>≥200,000 Btu/hr                    | ≥ 4000 Btu/h/gal and <10 gal tank | 80% E <sub>t</sub>                                   |
| Gas Tankless Water Heaters<br>≥200,000 Btu/hr                    | ≥ 4000 Btu/h/gal and ≥10 gal tank | 80% E <sub>t</sub><br>Standby Loss: (Q/800 + 110√V)  |

$EF_{EE}$  = EF of efficient water heater expressed as Energy Factor (EF) or Thermal Efficiency ( $E_i$ )  
 = Actual

$HotWaterUse_{Gallon}$  = Estimated annual hot water consumption (gallons)  
 = Actual if possible to provide reasonable custom estimate. If not, two methodologies are provided to develop an estimate:

1. Consumption per water heater capacity

= Consumption/cap \* Capacity

Where:

Consumption/cap = Estimate of consumption per gallon of tank capacity, dependent on building type:<sup>101</sup>

| Building Type                              | Consumption/cap |
|--|-----------------|
| Grocery, Convenience Store, and Restaurant | 803             |
| Lodging, Hospital, and Multifamily         | 630             |
| Health Clinic, Church, Warehouse           | 433             |
| Education, Office, and Retail              | 594             |
| Industrial                                 | 558             |
| Agriculture                                | 558             |
| Average Non Residential                    | 558             |

Capacity = Capacity of hot water heater in gallons  
 = Actual<sup>102</sup>

2. Consumption by facility size<sup>103</sup>

| Building Type  | Gallons hot water per unit per day | Unit     | Units/1000 ft <sup>2</sup> | Days per year | Gallons/1000 ft <sup>2</sup> floor area |
|----------------|------------------------------------|----------|----------------------------|---------------|---|
| Small Office   | 1                                  | person   | 2.3                        | 250           | 575                                     |
| Large Office   | 1                                  | person   | 2.3                        | 250           | 575                                     |
| Fast Food Rest | 0.7                                | meal/day | 784.6                      | 365           | 200,458                                 |
| Sit-Down Rest  | 2.4                                | meal/day | 340                        | 365           | 297,840                                 |
| Retail         | 2                                  | employee | 1                          | 365           | 730                                     |
| Grocery        | 2                                  | employee | 1.1                        | 365           | 803                                     |
| Warehouse      | 2                                  | employee | 0.5                        | 250           | 250                                     |

<sup>101</sup> Based on Cadmus analysis. Annual hot water usage in gallons based on CBECS (2003) consumption data for West North Central (removed outliers of 1,000 kBtu/hr or less) to calculate hot water usage. Annual hot water gallons per tank size gallons based on the tank sizing methodology found in ASHRAE 2011 HVAC Applications. Chapter 50 Service Water Heating. Demand assumptions (gallons per day) for each building type based on ASHRAE Chapter 50 and “Technology Data Characterizing Water Heating in Commercial Buildings: Application to End Use Forecasting,” Lawrence Berkeley National Library, December 1995. VEIC considers these values to be relatively conservative estimates that may benefit from future evaluation.

<sup>102</sup> If the replaced unit is a tankless water heater, an estimate of the required storage tank capacity for the application is required.

<sup>103</sup> Technology Data Characterizing Water Heating in Commercial Buildings: Application to End Use Forecasting,” Lawrence Berkeley National Library, December 1995.

| Building Type       | Gallons hot water per unit per day | Unit     | Units/1000 ft <sup>2</sup> | Days per year | Gallons/1000 ft <sup>2</sup> floor area |
|---------------------|------------------------------------|----------|----------------------------|---------------|---|
| Elementary School   | 0.6                                | person   | 9.5                        | 200           | 1,140                                   |
| Jr High/High School | 1.8                                | person   | 9.5                        | 200           | 3,420                                   |
| Health              | 90                                 | patient  | 3.8                        | 365           | 124,830                                 |
| Motel               | 20                                 | room     | 5                          | 365           | 36,500                                  |
| Hotel               | 14                                 | room     | 2.2                        | 365           | 11,242                                  |
| Other               | 1                                  | employee | 0.7                        | 250           | 175                                     |

- $\gamma_{\text{Water}}$  = Specific weight of water  
= 8.33 pounds per gallon
- $T_{\text{Out}}$  = Unmixed tank outlet water temperature  
= custom, otherwise assume 125°F<sup>104</sup>
- $T_{\text{In}}$  = Incoming water temperature from well or municipal system  
= 57.898°F<sup>105</sup>
- 1.0 = Heat capacity of water (1 Btu/lb\*°F)
- 100,000 = Conversion factor from Btu to therms

Additional Standby Loss Savings

Gas storage water heaters with an input rating >75,000 Btu/hr and gas tankless water heaters with an input rating ≥200,000 Btu/hr and storage capacity ≥10 gallons can claim additional savings due to lower standby losses.

$$\Delta \text{Therms}_{\text{Standby}} = \frac{(SL_{\text{base}} - SL_{\text{eff}}) * 8,766}{100,000}$$

Where:

- $SL_{\text{base}}$  = Standby loss of baseline water heater  
=  $Q/800 + 110\sqrt{V}$

Where

- $Q$  = Nameplate input rating in Btu/hr
- $V$  = Rated volume in gallons
- $SL_{\text{eff}}$  = Nameplate standby loss of new water heater, in BTU/hr
- 8,766 = Hours per year

<sup>104</sup> Ideally, the actual set point of the water heater should be used. If not available, 125 degrees is provided as an estimate of unmixed output temperature. While plumbing code generally limits temperatures at the end use, it typically does not limit the water heater system, which can be anywhere in the range 120 -201 degrees. For applications such as laundry and dishwashing, health and safety regulations may require water to be initially heated to higher temperatures. Since temperature setpoints can vary widely, market, program, or site-specific data should be used whenever possible.

<sup>105</sup> Using 40" deep soil temp as a proxy at Powell Gardens SCAN site. Average by month of available data from 3/28/02–10/11/14: 12 month average is 57.898. <http://www.wcc.nrcs.usda.gov/nwcc/site?sitenum=2061>



**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.3.2 Low Flow Faucet Aerator

### DESCRIPTION

This measure relates to the direct installation of a low flow faucet aerator in a commercial building. Expected applications include small business, office, restaurant, or motel. For multifamily or senior housing, the residential low flow faucet aerator should be used.

This measure was developed to be applicable to the following program types, DI.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure the installed equipment must be an energy efficient faucet aerator, for bathrooms rated at 1.5 gallons per minute (GPM) or less, or for kitchens rated at 2.2 GPM or less. Savings are calculated on an average savings per faucet fixture basis.

### DEFINITION OF BASELINE EQUIPMENT

The baseline condition is assumed to be a standard bathroom faucet aerator rated at 2.25 GPM or more, or a standard kitchen faucet aerator rated at 2.75 GPM or more.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 9 years.<sup>106</sup>

### DEEMED MEASURE COST

The incremental cost for this measure is \$8<sup>107</sup> or program actual

### LOADSHAPE

Water Heating BUS

---

### Algorithm

---

### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

**Note these savings are *per faucet retrofitted*<sup>108</sup>.**

$$\Delta \text{kWh} = \% \text{ElectricDHW} * ((\text{GPM}_{\text{base}} - \text{GPM}_{\text{low}}) / \text{GPM}_{\text{base}}) * \text{Usage} * \text{EPG}_{\text{electric}} * \text{ISR}$$

Where:

---

<sup>106</sup> Table C-6, Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. "[http://neep.org/uploads/EMV%20Forum/EMV%20Studies/measure\\_life\\_GDS%5B1%5D.pdf](http://neep.org/uploads/EMV%20Forum/EMV%20Studies/measure_life_GDS%5B1%5D.pdf)"

<sup>107</sup> Direct-install price per faucet assumes cost of aerator and install time. (2011, Market research average of \$3 and assess and install time of \$5 (20min @ \$15/hr)

<sup>108</sup> This algorithm calculates the amount of energy saved per aerator by determining the fraction of water consumption savings for the upgraded fixture. Due to the distribution of water consumption by fixture type, as well as the different number of fixtures in a building, several variables must be incorporated.

%ElectricDHW = proportion of water heating supplied by electric resistance heating

| DHW fuel    | %Electric DHW      |
|-------------|--------------------|
| Electric    | 100%               |
| Fossil Fuel | 0%                 |
| Unknown     | 43% <sup>109</sup> |

GPM\_base = Average flow rate, in gallons per minute, of the baseline faucet “as-used”  
 = 1.2<sup>110</sup> or custom based on metering studies<sup>111</sup>

GPM\_low = Average flow rate, in gallons per minute, of the low-flow faucet aerator “as-used”  
 = 0.94<sup>112</sup> or custom based on metering studies<sup>113</sup>

Usage = Estimated usage of mixed water (mixture of hot water from water heater line and cold water line) per faucet (gallons per year)  
 = If data is available to provide a reasonable custom estimate it should be used, if not use the following defaults (or substitute custom information in to the calculation):

| Building Type  | Gallons hot water per unit per day <sup>114</sup> (A) | Unit     | Estimated % hot water from Faucets <sup>115</sup> (B) | Multiplier <sup>116</sup> (C) | Unit                 | Days per year (D) | Annual gallons mixed water per faucet (A*B*C*D) |
|----------------|---|----------|---|-------------------------------|----------------------|-------------------|---|
| Small Office   | 1   | person   | 100%  | 10                            | employees per faucet | 250               | 2,500   |
| Large Office   | 1   | person   | 100%  | 45                            | employees per faucet | 250               | 11,250  |
| Fast Food Rest | 0.7   | meal/day | 50%   | 75                            | meals per faucet     | 365               | 9,581   |

<sup>109</sup> Default assumption for unknown fuel is based on EIA Commercial Building Energy Consumption Survey (CBECS) 2012 for Midwest North Central Region, see ‘HC8.9 Water Heating in Midwest Region.xls’. If utilities have specific evaluation results providing a more appropriate assumption for buildings in a particular market or geographical area, then they should be used.

<sup>110</sup> Representative baseline flow rate for kitchen and bathroom faucet aerators from sources 1, 2, 3, and 4. This accounts for all throttling and differences from rated flow rates. The most comprehensive available studies did not disaggregate kitchen use from bathroom use, but instead looked at total flow and length of use for all faucets. This makes it difficult to reliably separate kitchen water use from bathroom water use.

<sup>111</sup> Measurement should be based on actual average flow consumed over a period of time rather than a onetime spot measurement for maximum flow. Studies have shown maximum flow rates do not correspond well to average flow rate due to occupant behavior which does not always use maximum flow.

<sup>112</sup> Average retrofit flow rate for kitchen and bathroom faucet aerators from sources 1, 2, 3, and 4. This accounts for all throttling and differences from rated flow rates. Assumes all kitchen aerators at 2.2 gpm or less and all bathroom aerators at 1.5 gpm or less. The most comprehensive available studies did not disaggregate kitchen use from bathroom use, but instead looked at total flow and length of use for all faucets. This makes it difficult to reliably separate kitchen water use from bathroom water use. It is possible that programs installing low flow aerators lower than the 2.2 gpm for kitchens and 1.5 gpm for bathrooms will see a lower overall average retrofit flow rate.

<sup>113</sup> Measurement should be based on actual average flow consumed over a period of time rather than a onetime spot measurement for maximum flow. Studies have shown maximum flow rates do not correspond well to average flow rate due to occupant behavior which does not always use maximum flow.

<sup>114</sup> Table 2-45 Chapter 49, Service Water Heating, 2007 ASHRAE Handbook, HVAC Applications.

<sup>115</sup> Estimated based on data provided in Appendix E; “Waste Not, Want Not: The Potential for Urban Water Conservation in California”; [http://www.pacinst.org/reports/urban\\_usage/appendix\\_e.pdf](http://www.pacinst.org/reports/urban_usage/appendix_e.pdf)

<sup>116</sup> Based on review of the Illinois plumbing code (Employees and students per faucet). Retail, grocery, warehouse and health are estimates. Meals per faucet estimated as 4 bathroom and 3 kitchen faucets and average meals per day of 250 (based on California study above) – 250/7 = 36. Fast food assumption estimated.

| Building Type       | Gallons hot water per unit per day <sup>114</sup><br>(A) | Unit     | Estimated % hot water from Faucets <sup>115</sup><br>(B) | Multiplier <sup>116</sup><br>(C) | Unit                 | Days per year<br>(D) | Annual gallons mixed water per faucet<br>(A*B*C*D) |
|---------------------|--|----------|--|----------------------------------|----------------------|----------------------|--|
| Sit-Down Rest       | 2.4  | meal/day | 50%  | 36                               | meals per faucet     | 365                  | 15,768   |
| Retail              | 2  | employee | 100%   | 5                                | employees per faucet | 365                  | 3,650  |
| Grocery             | 2  | employee | 100%   | 5                                | employees per faucet | 365                  | 3,650  |
| Warehouse           | 2  | employee | 100%   | 5                                | employees per faucet | 250                  | 2,500  |
| Elementary School   | 0.6  | person   | 50%  | 50                               | students per faucet  | 200                  | 3,000  |
| Jr High/High School | 1.8  | person   | 50%  | 50                               | students per faucet  | 200                  | 9,000  |
| Health              | 90   | patient  | 25%  | 2                                | Patients per faucet  | 365                  | 16,425   |
| Motel               | 20   | room     | 25%  | 1                                | faucet per room      | 365                  | 1,825  |
| Hotel               | 14   | room     | 25%  | 1                                | faucet per room      | 365                  | 1,278  |
| Other               | 1  | employee | 100%   | 20                               | employees per faucet | 250                  | 5,000  |

$$\begin{aligned}
 \text{EPG}_{\text{electric}} &= \text{Energy per gallon of mixed water used by faucet (electric water heater)} \\
 &= (8.33 * 1.0 * (\text{WaterTemp} - \text{SupplyTemp})) / (\text{RE}_{\text{electric}} * 3412) \\
 &= (8.33 * 1.0 * (90 - 57.9)) / (0.98 * 3412) \\
 &= 0.0800 \text{ kWh/gal} \\
 8.33 &= \text{Specific weight of water (lbs/gallon)} \\
 1.0 &= \text{Heat Capacity of water (btu/lb-F)} \\
 \text{WaterTemp} &= \text{Assumed temperature of mixed water} \\
 &= 90\text{F}^{117} \\
 \text{SupplyTemp} &= \text{Assumed temperature of water entering building} \\
 &= 57.9\text{F}^{118} \\
 \text{RE}_{\text{electric}} &= \text{Recovery efficiency of electric water heater} \\
 &= 98\%^{119} \\
 3412 &= \text{Converts Btu to kWh (Btu/kWh)} \\
 \text{ISR} &= \text{In service rate of faucet aerators} \\
 &= \text{Assumed to be 1.0}
 \end{aligned}$$

<sup>117</sup> Temperature cited from SBW Consulting, Evaluation for the Bonneville Power Authority, 1994, [http://www.bpa.gov/energy/n/reports/evaluation/residential/faucet\\_aerator.cfm](http://www.bpa.gov/energy/n/reports/evaluation/residential/faucet_aerator.cfm). This is a variable that would benefit from further evaluation.

<sup>118</sup> Using 40" deep soil temp as a proxy at Powell Gardens SCAN site. Average by month of available data from 3/28/02–10/11/14: 12 month average is 57.898. <http://www.wcc.nrcs.usda.gov/nwcc/site?sitenum=2061>

<sup>119</sup> Electric water heater have recovery efficiency of 98%: <http://www.ahrinet.org/ARI/util/showdoc.aspx?doc=576>

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

$\Delta kWh$  = calculated value above on a per faucet basis

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0001811545

**FOSSIL FUEL IMPACT DESCRIPTIONS AND CALCULATION**

$$\Delta Therms = \%FossilDHW * ((GPM\_base - GPM\_low)/GPM\_base) * Usage * EPG\_gas * ISR$$

Where:

$\%FossilDHW$  = proportion of water heating supplied by fossil fuel heating

| DHW fuel    | $\%Fossil\_DHW$    |
|-------------|--------------------|
| Electric    | 0%                 |
| Fossil Fuel | 100%               |
| Unknown     | 57% <sup>120</sup> |

$$\begin{aligned} EPG\_gas &= \text{Energy per gallon of mixed water used by faucet (gas water heater)} \\ &= (8.33 * 1.0 * (WaterTemp - SupplyTemp)) / (RE\_gas * 100,000) \\ &= 0.00772 \text{ Therm/gal} \end{aligned}$$

Where:

RE\_gas = Recovery efficiency of gas water heater  
 = 67%<sup>121</sup>

100,000 = Converts Btus to Therms (Btu/Therm)

Other variables as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

$$\Delta gallons = ((GPM\_base - GPM\_low)/GPM\_base) * Usage * ISR$$

Variables as defined above

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>120</sup> Default assumption for unknown fuel is based on EIA Commercial Building Energy Consumption Survey (CBECS) 2012 for Midwest North Central Region, see 'HC8.9 Water Heating in Midwest Region.xls'. If utilities have specific evaluation results providing a more appropriate assumption for buildings in a particular market or geographical area, then they should be used.

<sup>121</sup> Review of AHRI Directory suggests range of recovery efficiency ratings for new Gas DHW units of 70-87%. Average of existing units is estimated at 75%. Commercial properties are more similar to MF homes than SF homes. MF hot water is often provided by a larger commercial boiler. This suggests that the average recovery efficiency is somewhere between a typical central boiler efficiency of .59 and the .75 for single family home. An average is used for this analysis by default.

**SOURCES USED FOR GPM ASSUMPTIONS**

| Source ID | Reference  |
|-----------|--|
| 1         | 2000, Mayer, Peter, William DeOreo, and David Lewis. Seattle Home Water Conservation Study. December 2000.   |
| 2         | 2003, Mayer, Peter, William DeOreo. Residential Indoor Water Conservation Study. Aquacraft, Inc. Water Engineering and Management. Prepared for East Bay Municipal Utility District and the US EPA. July 2003. |
| 3         | 2011, DeOreo, William. Analysis of Water Use in New Single Family Homes. By Aquacraft. For Salt Lake City Corporation and US EPA. July 20, 2011.   |
| 4         | 2008, Schultdt, Marc, and Debra Tachibana. Energy related Water Fixture Measurements: Securing the Baseline for Northwest Single Family Homes. 2008 ACEEE Summer Study on Energy Efficiency in Buildings.      |

### 2.3.3 Circulator Pump

#### DESCRIPTION

Demand control recirculation pumps seek to reduce inefficiency by combining control via temperature and demand inputs, whereby the controller will not activate the recirculation pump unless both (a) the recirculation loop return water has dropped below a prescribed temperature (e.g. 100°F) and (b) a CDHW demand is sensed as water flow through the CDHW system.

This measure was developed to be applicable to the following program types: TOS, RF, NC. If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

Re-circulating pump shall cycle on based on (a) the recirculation loop return water dropping below a prescribed temperature (e.g. 100°F) and (b) a CDHW demand is sensed as water flow through the CDHW system.

#### DEFINITION OF BASELINE EQUIPMENT

The base case for this measure category is an existing, un-controlled recirculation pump on a gas-fired Central Domestic Hot Water System.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The effective useful life is 15 years<sup>122</sup>.

#### DEEMED MEASURE COST

The assumed measure cost is \$1,200 per pump<sup>123</sup>.

#### LOADSHAPE

Miscellaneous BUS

---

---

### Algorithm

---

---

#### CALCULATION OF ENERGY SAVINGS

Savings shown are per pump.

#### ELECTRIC ENERGY SAVINGS

Deemed at 651 kWh<sup>124</sup>.

---

<sup>122</sup> Benningfield Group. (2009). *PY 2009 Monitoring Report: Demand Control for Multifamily Central Domestic Hot Water*. Folsom, CA: Prepared for Southern California Gas Company, October 30, 2009.

<sup>123</sup> Gas Technology Institute. (2014). *1003: Demand-based domestic hot water recirculation Public project report*. Des Plaines, IL: Prepared for Nicor Gas, January 7, 2014.

<sup>124</sup> Based on results from the Nicor Gas Emerging Technology Program study, this value is the average kWh saved per pump. Note this value does not reflect savings from electric units but electrical savings from gas-fired units.

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

Summer coincident peak demand savings are expected to be negligible.

**NATURAL GAS SAVINGS**

$$\Delta\text{Therms} = 55.9 * \text{number of dwelling units}^{125}$$

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>125</sup> Based on results from the Nicor Gas Emerging Technology Program study, this value is the average therms saved per dwelling unit.



## 2.4 HVAC End Use

Table: Effective Full Load Heating and Cooling Hours, by building type.

| Building Type                | Whiteman AFB (Avg) |              | Lincoln, NE (NW) |              | Fort Madison, IA (NE) |              | Kaiser (SW)  |              | Cape Girardeau (SE) |              | St Louis     |              | Kansas City  |              |
|------------------------------|--------------------|--------------|------------------|--------------|-----------------------|--------------|--------------|--------------|---------------------|--------------|--------------|--------------|--------------|--------------|
|                              | Heating EFLH       | Cooling EFLH | Heating EFLH     | Cooling EFLH | Heating EFLH          | Cooling EFLH | Heating EFLH | Cooling EFLH | Heating EFLH        | Cooling EFLH | Heating EFLH | Cooling EFLH | Heating EFLH | Cooling EFLH |
| Large Office                 | 1039               | 1846         | 1141             | 1756         | 1088                  | 1539         | 997          | 1918         | 861                 | 1784         | 988          | 1869         | 1056         | 1792         |
| Medium Office                | 649                | 1350         | 740              | 1245         | 728                   | 1146         | 567          | 1412         | 528                 | 1323         | 645          | 1386         | 708          | 1325         |
| Small Office                 | 946                | 1114         | 1030             | 1041         | 1029                  | 975          | 926          | 1165         | 769                 | 1082         | 893          | 1159         | 989          | 1097         |
| Warehouse                    | 991                | 415          | 1201             | 380          | 1227                  | 357          | 1189         | 457          | 851                 | 391          | 1059         | 433          | 1207         | 400          |
| Stand-alone Retail           | 1012               | 1000         | 1125             | 903          | 1139                  | 808          | 968          | 1076         | 891                 | 965          | 994          | 986          | 1036         | 946          |
| Strip Mall                   | 1030               | 970          | 1124             | 884          | 1148                  | 794          | 984          | 1044         | 905                 | 944          | 1001         | 956          | 1039         | 916          |
| Primary School               | 806                | 1019         | 892              | 958          | 898                   | 852          | 798          | 1155         | 666                 | 1016         | 785          | 1195         | 840          | 971          |
| Secondary School             | 719                | 812          | 803              | 724          | 867                   | 677          | 754          | 911          | 603                 | 800          | 712          | 873          | 779          | 779          |
| Supermarket                  | 1279               | 875          | 1367             | 800          | 1405                  | 672          | 1330         | 902          | 1120                | 837          | 1248         | 846          | 1344         | 820          |
| Quick Service Restaurant     | 1233               | 1013         | 1414             | 916          | 1513                  | 819          | 1316         | 1127         | 1025                | 973          | 1262         | 1035         | 1387         | 970          |
| Full Service Restaurant      | 1367               | 1119         | 1499             | 1014         | 1655                  | 952          | 1442         | 1234         | 1156                | 1114         | 1380         | 1124         | 1473         | 1059         |
| Hospital                     | 3388               | 3318         | 3205             | 3055         | 3467                  | 2733         | 3891         | 3448         | 2913                | 3312         | 3170         | 3413         | 3372         | 3215         |
| Outpatient Health Care       | 3203               | 3113         | 3261             | 2834         | 3150                  | 2627         | 3128         | 3217         | 3001                | 3109         | 3013         | 3265         | 3164         | 2994         |
| Small Hotel - Building       | 602                | 2247         | 697              | 2097         | 760                   | 1914         | 620          | 2386         | 436                 | 2304         | 575          | 2277         | 669          | 2207         |
| Large Hotel - Building       | 1656               | 2148         | 1472             | 2016         | 1980                  | 1916         | 1943         | 2369         | 1202                | 2186         | 1551         | 2363         | 1692         | 2155         |
| Midrise Apartment - Building | 1462               | 1132         | 1599             | 1028         | 1710                  | 901          | 1590         | 1214         | 1208                | 1085         | 1433         | 1171         | 1580         | 1090         |
| C&I Average <sup>126</sup>   | 1067               | 1018         | 1196             | 937          | 1217                  | 865          | 1118         | 1085         | 910                 | 996          | 1060         | 1053         | 1164         | 986          |

<sup>126</sup> See Volume 1 for details on modeling calculations and assumptions.cek

## 2.4.1 Boiler

### DESCRIPTION

This measure applies to the installation of a high-efficiency, gas-fired steam or hot water boiler in a commercial or multifamily space. High-efficiency boilers achieve gas savings through the use of a sealed combustion chamber and multiple heat exchangers that remove a significant portion of the waste heat from flue gasses. Because multiple heat exchangers are used to remove waste heat from the escaping flue gasses, some of the flue gasses condense and must be drained.

This measure was developed to be applicable to the following program type: TOS.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a new boiler that is used 80% or more for space heating instead of process heating. Boiler annual fuel utilization efficiency (AFUE), thermal efficiency ( $E_T$ ), or combustion efficiency ( $E_C$ ) ratings must meet the minimum standards according to utility program requirements.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new boiler with an AFUE,  $E_T$ , or  $E_C$  rating that meets minimum federal energy efficiency standards.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 26.5 years for hot water gas-fired boilers and 23.6 years for steam gas-fired boilers.<sup>127</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure depends on boiler type (hot water or steam), capacity, and efficiency, as listed in the table below.<sup>128</sup>

| Incremental Costs for Hot Water Boilers |            |                                       |
|---|------------|---------------------------------------|
| Boiler Capacity                         | Efficiency | Incremental Equipment Cost (Per Unit) |
| <300,000 Btu/hr                         | 83% AFUE   | \$16                                  |
|   | 84% AFUE   | \$31                                  |
|   | 85% AFUE   | \$187                                 |
|   | 90% AFUE   | \$776                                 |
|   | 92% AFUE   | \$1,126                               |
|   | 96% AFUE   | \$3,899                               |
| ≥300,000 & ≤2,500,000 Btu/hr            | 81% $E_T$  | \$856                                 |
|   | 82% $E_T$  | \$1,779                               |

<sup>127</sup> Average lifetime from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Residential Boilers. U.S. Department of Energy, December 22, 2015.

<sup>128</sup> For boilers with input <300,000 Btu/hr, incremental costs are from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Residential Boilers. U.S. Department of Energy, December 22, 2015. For boilers ≥300,000 Btu/hr, incremental costs are from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Commercial Packaged Boilers. U.S. Department of Energy, March 4, 2016.

| Incremental Costs for Hot Water Boilers |                    |                                       |
|---|--------------------|---------------------------------------|
| Boiler Capacity                         | Efficiency         | Incremental Equipment Cost (Per Unit) |
|   | 84% E <sub>T</sub> | \$4,261                               |
|   | 85% E <sub>T</sub> | \$5,532                               |
|   | 93% E <sub>T</sub> | \$15,788                              |
|   | 95% E <sub>T</sub> | \$16,529                              |
|   | 99% E <sub>T</sub> | \$22,036                              |
| >2,500,000 Btu/hr                       | 83% E <sub>C</sub> | \$5,467                               |
|   | 84% E <sub>C</sub> | \$11,967                              |
|   | 85% E <sub>C</sub> | \$19,040                              |
|   | 94% E <sub>C</sub> | \$73,087                              |
|   | 97% E <sub>C</sub> | \$82,242                              |

| Incremental Costs for Steam Boilers |                     |                                       |
|-------------------------------------|---------------------|---------------------------------------|
| Boiler Capacity                     | Efficiency Category | Incremental Equipment Cost (Per Unit) |
| <300,000 Btu/hr                     | 82% AFUE            | \$40                                  |
|                                     | 83% AFUE            | \$319                                 |
| ≥300,000 & ≤2,500,000 Btu/hr        | 78% E <sub>T</sub>  | \$790                                 |
|                                     | 79% E <sub>T</sub>  | \$1,644                               |
|                                     | 80% E <sub>T</sub>  | \$2,567                               |
|                                     | 81% E <sub>T</sub>  | \$3,565                               |
|                                     | 83% E <sub>T</sub>  | \$5,810                               |
| >2,500,000 Btu/hr                   | 78% E <sub>T</sub>  | \$2,371                               |
|                                     | 79% E <sub>T</sub>  | \$4,878                               |
|                                     | 80% E <sub>T</sub>  | \$7,529                               |
|                                     | 81% E <sub>T</sub>  | \$10,332                              |
|                                     | 82% E <sub>T</sub>  | \$13,296                              |
|                                     | 84% E <sub>T</sub>  | \$19,743                              |

**LOADSHAPE**

Heating BUS

---

**Algorithm**

---

**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{EFF_{EE} - EFF_{Base}}{EFF_{Base}} \right)}{100,000}$$

Where:

- EFLH = Equivalent full load hours for heating  
= See table at the beginning of section 2.4 HVAC End Use. A custom value may also be used.
- Capacity = Nominal heating input capacity (Btu/hr) of efficient boiler  
= Actual
- EFF<sub>EE</sub> = Efficiency rating of high efficiency boiler  
= Actual
- EFF<sub>Base</sub> = Efficiency rating of baseline boiler  
= See tables below.<sup>129</sup> Baseline efficiency depends on boiler type (hot water or steam) and capacity.

| Federal Standards for Hot Water Boilers |                    |
|---|--------------------|
| Boiler Capacity                         | Efficiency Rating  |
| <300,000 Btu/hr                         | 82% AFUE           |
| ≥300,000 & ≤2,500,000 Btu/hr            | 80% E <sub>T</sub> |
| >2,500,000 Btu/hr                       | 82% E <sub>c</sub> |

| Federal Standards for Steam Boilers                   |                    |
|---|--------------------|
| Boiler Capacity                                       | Efficiency Rating  |
| <300,000 Btu/hr                                       | 80% AFUE           |
| All except natural draft ≥300,000 & ≤2,500,000 Btu/hr | 79% E <sub>T</sub> |
| Natural draft ≥300,000 & ≤2,500,000 Btu/hr            | 77% E <sub>T</sub> |
| All except natural draft >2,500,000 Btu/hr            | 79% E <sub>T</sub> |
| Natural draft >2,500,000 Btu/hr                       | 77% E <sub>T</sub> |

100,000 = Factor to convert Btus to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

<sup>129</sup> For boilers with input <300,000 Btu/hr, efficiency standards are from 10 CFR 431.87. For boilers ≥300,000 Btu/hr, efficiency standards are from 10 CFR 430.32.

## 2.4.2 Boiler Averaging Controls

### DESCRIPTION

Also known as “ALM” or Advanced Load Monitoring controls, this measure derives energy savings by dynamically managing boiler operation through use of a microprocessor controller augmenting existing boiler controls. The ALM monitors and records boiler cycling data including water temperature data that reduces the boiler from firing for a period of time to limit cycling losses during perceived low-load conditions. The ALM controller works with hydronic heating systems with “primary/secondary” or single loop piping arrangements by monitoring primary loop temperatures. When the boiler aquastat calls for heat, the ALM controller may delay this firing by up to 15 minutes depending on temperature data. The ALM controller does not activate a standby boiler, nor does it stop a firing boiler. Rather, it limits cycling losses by temporarily and dynamically lowering the boiler firing temperature resulting in lengthening of boiler firing times or lengthening time between firing cycles. Savings are proportional to the boiler’s oversizing and configuration of the building distribution system. The ALM is compatible with existing controls including multistage/modulating combustion and existing OTR. Features such as envelope and pipe insulation improvements may increase the savings potential. At this time, ALM controllers are not compatible with central steam boilers because they monitor temperatures only, with no pressure data collected by the unit.<sup>130</sup>

This measure was developed to be applicable to the following program types: RF.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify the boiler(s) must be retrofitted to incorporate an ALM control system.

### DEFINITION OF BASELINE EQUIPMENT

The baseline is a hot water boiler system without ALM controls.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The measure life is 20 years.<sup>131</sup>

### DEEMED MEASURE COST

As a retrofit measure, the actual installed cost should be used for screening purposes. If unknown, a cost of \$7,700<sup>132</sup> can be used for screening purposes.

### LOADSHAPE

Heating BUS

---

<sup>130</sup> Description as well as definition of baseline equipment sourced by a manufacturer of ALM device.

<sup>131</sup> The Brooklyn Union Gas Company, High Efficiency Heating and Water and Controls, Gas Energy Efficiency Program Implementation Plan.

<sup>132</sup> Building America Case Study: Advanced boiler Load Monitoring Controllers, Chicago, Illinois (Fact Sheet), Technology Solutions for New and Existing Homes, Energy Efficiency & Renewable Energy (EERE)

---

**Algorithm**

---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

$$\Delta\text{Therms} = B_{\text{input}} * SF * \text{EFLH}_{\text{heating}} / (100,000)$$

Where:

$B_{\text{input}}$  = Boiler Input Capacity (Btu/hr)  
= actual input capacity of existing boiler

SF = Savings factor  
= 10%<sup>133</sup> or custom input if it can be substantiated

$\text{EFLH}_{\text{heating}}$  = See table at the beginning of section 2.4 HVAC End Use. A custom value may also be used.

100,000 = conversion from Btu to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>133</sup> Field Test of Boiler Primary Loop Controller, U.S. DOE Building Technology Office, Energy Efficiency & Renewable Energy, September 2014. Of the case studies presented, the lowest annualized savings was chosen as a default savings factor to acknowledge that ALM controllers are an emerging technology with limited research. Savings are anticipated to be proportional with how much boilers are oversized, but additional research and evaluation is needed to confirm this relationship.

### 2.4.3 Boiler Lockout/Reset Controls

#### DESCRIPTION

This measure relates to improving combustion efficiency by adding controls to non-residential building space heating hot water boilers to vary the boiler entering water temperature relative to heating load as a function of the outdoor air temperature to save energy. Energy is saved by increasing the temperature difference between the water temperature entering the boiler in the boiler's heat exchanger and the boiler's burner flame temperature. The flame temperature remains the same while the water temperature leaving the boiler decreases with the decrease in heating load due to an increase in outside air temperature. A lockout temperature is also set to prevent the boiler from turning on when it is above a certain temperature outdoors.

This measure was developed to be applicable to the following program types: Retrofit. If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

Natural gas customer adding boiler reset controls capable of resetting the boiler supply water temperature in an inverse linear fashion with outdoor air temperature. Boiler lockout temperatures should be set at this time as well, to turn the boiler off when the temperature goes above an appropriate setpoint.

#### DEFINITION OF BASELINE EQUIPMENT

Existing hot water boiler without boiler reset controls, any size with constant hot water flow.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The measure life is 20 years<sup>134</sup>

#### DEEMED MEASURE COST

The cost of this measure is \$612<sup>135</sup>

#### LOADSHAPE

Heating BUS

---

### Algorithm

---

#### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

N/A

#### SUMMER COINCIDENT PEAK DEMAND SAVINGS

N/A

---

<sup>134</sup>CLEARResult references the Brooklyn Union Gas Company, High Efficiency Heating and Water and Controls, Gas Energy Efficiency Program Implementation Plan.

<sup>135</sup> Nexant. Questar DSM Market Characterization Report. August 9, 2006.

**NATURAL GAS ENERGY SAVINGS**

$$\Delta\text{Therms} = B_{\text{input}} * SF * \text{EFLH}_{\text{heating}} / (100,000)$$

Where:

$B_{\text{input}}$  = Boiler Input Capacity (Btu/hr)  
= actual input capacity of existing boiler

SF = Savings factor  
= 8%<sup>136</sup> or custom

$\text{EFLH}_{\text{heating}}$  = See table at the beginning of section 2.4 HVAC End Use. A custom value may also be used.

100,000 = conversion from Btu to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>136</sup> Savings factor is the estimate of annual gas consumption that is saved due to adding boiler reset controls. The CLEAResult uses a boiler tuneup savings value derived from Xcel Energy "DSM Biennial Plan-Technical Assumptions," Colorado. Focus on Energy uses 8%, citing multiple sources. Vermont Energy Investment Corporation's boiler reset savings estimates for custom projects further indicate 8% savings estimate is better reflection of actual expected savings.



## 2.4.4 High Temperature Heating & Ventilating (HTHV) Direct Fired Heater

### DESCRIPTION

High Temperature Heating & Ventilating (HTHV) Direct Fired Heaters are a newly classified technology class of products that are capable of providing heating, ventilation and de-stratification solutions for commercial and industrial applications. Using high pressure blowers, HTHV heaters draw 100% outside air, combust fuel in the airstream, and then direct the heated air at high velocities into the space. With air-fuel ratios typically 50 times the stoichiometric requirement, complete combustion results in emissions that consist primarily of water vapor and carbon dioxide.

This measure was developed to be applicable to the following program types: TOS, NC. If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

A 100% Outside Air, non-recirculating direct-fired gas heater capable of greater than 140 degree temperature rise and greater than 150 degree discharge temperature, with fully modulating temperature controls to meet both ventilation and space heating requirements. To qualify for this measure the installed equipment must be a HTHV direct fired natural gas heater.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a standard indirect-fired unit natural gas heater. Additionally, the HTHV heater is assumed to replace a separate make-up air unit that would have been required to meet space ventilation requirements.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 20 years.<sup>137</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure,<sup>138</sup> based on rated input capacity, is assumed to be \$0.007428 / Btu/hr.

### LOADSHAPE

Heating BUS

---

---

## Algorithm

---

---

### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

N/A. Although HTHV heaters require more powerful supply fans than a traditional indirect-fired baseline unit and consequently consume more electricity, this measure assumes that the HTHV heater also replaces the need for a separate make-up air unit that would require fan energy that is assumed to equal that of the HTHV unit. Thus, no electric impact is assumed.

---

<sup>137</sup>Measure life based upon service records of a HTHV manufacturer for comparable condensing unit heaters.

<sup>138</sup>Calculated from incremental costs outlined in DOE publication “Field Demonstration of High-Efficiency Gas Heaters,” October 2014.

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

$$\Delta\text{Therms} = H_{\text{input}} * \text{SF} * \text{EFLH}_{\text{heating}} / (100,000)$$

Where:

$H_{\text{input}}$  = Infrared Heater Input Capacity (Btu/hr)  
= actual input capacity of incentivized unit

SF = Savings factor  
= 15%<sup>139</sup> or custom input if it can be substantiated

$\text{EFLH}_{\text{heating}}$  = See table at the beginning of section 2.4 HVAC End Use. A custom value may also be used.

100,000 = conversion from Btu to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>139</sup> Savings factor is the resultant of  $(0.92/0.8) - 1 = 0.15$ ; where 0.92 is the efficiency of the HTHV heater, taken to be 0.92 which represents the LHV of natural gas, appropriate for direct firing applications; and 0.8 is the efficiency of the baseline unit heater, as per DOE Commercial Warm Air Furnace Standard DOE 10 CFR, Part 431.

## 2.4.5 High Turndown Burner for Spacing Heating Boilers

### DESCRIPTION

This measure applies to the retrofit of non-residential, boilers equipped with burners that have a turndown higher than 10:1. Turndown is the ratio of the high firing rate to the low firing rate. When boilers are subjected to loads below the low firing rate, the boiler must cycle on/off to meet load requirements. A higher turndown ratio reduces burner startups, provides better load control, saves wear-and-tear on the burner, and reduces purge-air requirements, resulting in a higher overall energy efficiency. The default values provided by the following algorithm assume that boiler(s) are used predominantly for space heating. Custom inputs should be derived for instances where they supply process heating.

This measure was developed to be applicable to the following program type: RF.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the efficient equipment must be a non-residential boiler with a burner turndown higher than 10:1.<sup>140</sup>

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is assumed to be a non-residential boiler with a burner turndown of 6:1<sup>141</sup> or lower.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>142</sup>

### DEEMED MEASURE COST

The deemed installed measure cost including labor is approximately \$3,800/MMBtu/hr.<sup>143</sup>

### LOADSHAPE

Heating BUS

---

---

### Algorithm

---

---

### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

N/A

#### SUMMER COINCIDENT PEAK DEMAND SAVINGS

N/A

---

<sup>140</sup> Safe turndown for high-performance gas-fired boilers from Understanding Fuel Savings in the Boiler Room. ASHRAE, December 2008.

<sup>141</sup> Typical turndown for gas-fired boilers from Understanding Fuel Savings in the Boiler Room. ASHRAE, December 2008.

<sup>142</sup> Measure life from the 2013-2015 Triennial Plan for the Minnesota Electric and Natural Gas Conservation Improvement Program. Xcel Energy, June 2, 2012.

<sup>143</sup> Average of capital costs for burner repair/upgrade from Available and Emerging Technologies for Reducing Greenhouse Gas Emissions from Industrial, Commercial, and Institutional Boilers. EPA Office of Air and Radiation, October 2010.

**NATURAL GAS SAVINGS**

$$\Delta Therms = \frac{EFLH * Capacity * \%Save}{100,000}$$

Where:

EFLH = Equivalent full load hours for heating  
= See table at the beginning of section 2.4 HVAC End Use. A custom value may also be used.

Capacity = Nominal heating input capacity (Btu/hr) of existing boiler  
= Actual

%Save = Reduction in gas consumption (%) as a result of high turndown burner installation  
= Custom or if unknown, assume 4%<sup>144</sup>

100,000 = Factor to convert Btus to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>144</sup> Average of savings assumptions for burner repair/upgrade from Available and Emerging Technologies for Reducing Greenhouse Gas Emissions from Industrial, Commercial, and Institutional Boilers. EPA Office of Air and Radiation, October 2010 and for modulating burners from 2013-2015 Triennial Plan for the Minnesota Electric and Natural Gas Conservation Improvement Program. Xcel Energy, June 2, 2012.

## 2.4.6 Infrared Heaters

### DESCRIPTION

This measure applies to natural gas fired low-intensity infrared heaters with an electric ignition. This measure includes replacement of failed or working standard indirect-fired heating systems within existing commercial and industrial buildings with natural gas fired infrared heaters, as well as installation of infrared heaters in new buildings. Low-intensity heaters have an enclosed flame. When heat is called for, the air/fuel mixture is combusted in a burner control box and the hot gases are forced through steel radiant tubing by an internal blower. The hot gasses heat the tubing assembly, which emit a portion of the energy as infrared energy. This infrared energy is directed toward the floor by highly polished reflectors that sit atop the tubing assembly. Infrared energy is absorbed by the floor, machinery, or anything else in its path, which in turn re-radiate this heat to create a comfort zone at the floor level.

This measure was developed to be applicable to the following program types: Time of Sale, New Construction. If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure the installed equipment must be a low-intensity infrared natural gas heater with an electric ignition.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a standard indirect-fired unit natural gas heater.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 15 years<sup>145</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure is as follows, based on size category<sup>146</sup>

| Size Category                     | Incremental Cost |
|-----------------------------------|------------------|
| Up to 50,000 BTUh                 | \$469.97         |
| > 50,000 BTUh up to 150,000 BTUh  | \$421.74         |
| > 150,000 BTUh up to 175,000 BTUh | \$380.40         |
| Greater than 175,000 BTUh         | \$352.84         |

### LOADSHAPE

Heating BUS

### COINCIDENCE FACTOR

N/A

---

<sup>145</sup>Focus on Energy Evaluation, Business Programs: Measure Life Study, August 25, 2009.

<sup>146</sup>Incremental Cost Study Phase Four Final Report, Northeast Energy Efficiency Partnerships, June 15, 2015

---

**Algorithm**

---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

$$\Delta\text{Therms} = H_{\text{input}} * \text{SF} * \text{EFLH}_{\text{heating}} / (100,000)$$

Where:

- $H_{\text{input}}$  = Infrared Heater Input Capacity (Btu/hr)  
= actual input capacity of incentivized unit
- $\text{SF}$  = Savings factor  
= 17.6%<sup>147</sup> or custom input if it can be substantiated
- $\text{EFLH}_{\text{heating}}$  = Equivalent Full Load Hours for heating are provided in section HVAC End Use.  
A custom value may also be used.
- 100,000 = conversion from Btu to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>147</sup> Although infrared heaters do not achieve savings by delivering heat more efficiently (i.e., equipment efficiencies are similar to conventional baseline unit heaters), savings from less stratification as well as more “targeted” heating means that comfort can be achieved with a 15% reduction in heat load (Minimum load reduction cited in 2008 ASHRAE® HANDBOOK: Heating, Ventilating, and Air-Conditioning SYSTEMS AND EQUIPMENT, Inch-Pound Edition, Chapter 15, pg. 15.1, “Energy Conservation,” 2008, American Society of Heating, Refrigerating, and Air-Conditioning Engineers, Inc., 1791 Tullie Circle N.E., Atlanta, GA 30329, U.S.A.). Accordingly, the savings factor is calculated as  $(1/0.85 - 1)$ . Savings may be greater and are dependent on proper heater layout design.

## 2.4.7 Small Commercial Learning Thermostats

### DESCRIPTION

This measure characterizes the energy savings from the installation of a new Learning Thermostat for reduced cooling and heating energy consumption through temperature set-back during unoccupied or reduced demand times as well as automatic adjustments based on occupancy patterns and various independent variables such as weather. This measure is limited to small businesses as defined by programs<sup>148</sup>, as they have smaller HVAC systems that are similar to residential HVAC systems and may be controlled by a simple manual adjustment thermostat. Mid- to large-sized businesses will typically have a building automation system or some other form of automated HVAC controls. This measure is only appropriate for single zone heating systems. Custom calculations are required for savings for learning thermostats installed in multi-zone systems.

This measure was developed to be applicable to the following program types: RF, DI, TOS.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

The criteria for this measure are established by replacement of a manual-only temperature control with one that has the capability to adjust temperature set-points according to various independent variables without manual intervention.

### DEFINITION OF BASELINE EQUIPMENT

For new thermostats the baseline is a non-programmable thermostat requiring manual intervention to change the temperature set-point.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life of a learning thermostat is assumed to be 10 years<sup>149</sup> based upon equipment life only<sup>150</sup>.

### DEEMED MEASURE COST

Actual material and labor costs should be used if the implementation method allows. If unknown, the capital cost for this measure is assumed to be \$224<sup>151</sup>.

### LOADSHAPE

Cooling BUS

Heating BUS (only use this loadshape for gas savings)

---

<sup>148</sup> The square footage of the small office prototype building modeled in is 7,500 sf.

<sup>149</sup> Table 1, HVAC Controls, Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007

<sup>150</sup> Future evaluation is strongly encouraged to inform the persistence of savings to further refine measure life assumption. As this characterization depends heavily upon a large scale but only 2-year study of the energy impacts of programmable thermostats, the longer term impacts should be assessed.

<sup>151</sup> 2012Ameren Missouri Technical Resource Manual – Effective January 1, 2018.

---

**Algorithm**

---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh = \frac{1}{eff} * EFLH_{COOL} * \frac{Btuh_{COOL}}{1000} * ESF_{COOL}$$

Where:

- eff = Efficiency of HVAC unit  
= Actual; If not available, assume 10 SEER
- EFLH<sub>COOL</sub> = Effective Full Load Cooling Hours  
= Actual; If not available, refer to section 2.4 HVAC
- Btuh<sub>COOL</sub> = Cooling System Capacity  
= Actual
- ESF<sub>COOL</sub> = Cooling energy savings factor  
= Assume 0.139<sup>152</sup>

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = kWh * CF$$

Where:

- kWh = Electric energy savings, as calculated above
- CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
= 0.0009106840

**NATURAL GAS ENERGY SAVINGS**

$$\Delta Therms = \frac{Sqft * Savings Factor * PF}{100 * AFUE(exist)}$$

Where:

- Sqft = square footage of building controlled by thermostat
- AFUE (exist) = efficiency rating of existing heating equipment (AFUE), in decimal form.
- 100 = converts kBtu to therms, 1 therm = 100 kBtu
- Savings Factor = 9.940 kBtu/sf-yr<sup>153</sup>

---

<sup>152</sup> Cadmus (Aarish, C., M. Perussi, A. Rietz, and D. Korn). *Evaluation of the 2013–2014 Programmable and Smart Thermostat Program*. Prepared for Northern Indiana Public Service Company and Vectren Corporation. 2015.

<sup>153</sup> Heating Savings Factors for the programmable thermostat are calculated as the savings in annual building load divided by the square footage of the prototype building (5,500 sf) and converted to kBtu.



**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.4.8 Small Commercial Programmable Thermostats

### DESCRIPTION

This measure characterizes the energy savings from the installation of a new Programmable Thermostat for reduced heating energy consumption through temperature set-back during unoccupied or reduced demand times. This measure is limited to small businesses as defined by programs<sup>154</sup>, as they have smaller HVAC systems that are similar to residential HVAC systems and may be controlled by a simple manual adjustment thermostat. Mid- to large-sized businesses will typically have a building automation system or some other form of automated HVAC controls. This measure is only appropriate for single zone heating systems. Custom calculations are required for savings for programmable thermostats installed in multi-zone systems.

This measure was developed to be applicable to the following program types: RF, DI.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

The criteria for this measure are established by replacement of a manual-only temperature control with one that has the capability to adjust temperature set-points according to a schedule without manual intervention.

### DEFINITION OF BASELINE EQUIPMENT

For new thermostats the baseline is a non-programmable thermostat requiring manual intervention to change the temperature set-point.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life of a programmable thermostat is assumed to be 8 years<sup>155</sup> based upon equipment life only<sup>156</sup>.

### DEEMED MEASURE COST

Actual material and labor costs should be used if the implementation method allows. If unknown, the capital cost for this measure is assumed to be \$181<sup>157</sup>.

### LOADSHAPE

Cooling BUS

Heating BUS

---

<sup>154</sup> The square footage of the small office prototype building modeled in is 7,500 sf.

<sup>155</sup> Table 1, HVAC Controls, Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007

<sup>156</sup> Future evaluation is strongly encouraged to inform the persistence of savings to further refine measure life assumption. As this characterization depends heavily upon a large scale but only 2-year study of the energy impacts of programmable thermostats, the longer term impacts should be assessed.

<sup>157</sup> Based upon Nicor, Illinois Rider 30 Business EER Program Database, Paid Rebates with Programmable Thermostat Installation Costs, Program to Date as of January 11, 2013. If Missouri average costs are available, they should be used.

---

**Algorithm**

---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh = \frac{Sqft * Savings Factor * PF}{EER(exist)}$$

Where:

- Sqft = square footage of building controlled by thermostat
- EER(exist) = efficiency rating of existing cooling equipment EER (btu hr/W)
- Savings Factor = 0.578 kWh/sf-yr<sup>158</sup>
- PF = Persistence Factor to account for thermostat being placed on hold, reset or bypassed.  
= Actual if provided in program evaluation, else assume 50% <sup>159</sup>

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

$$\Delta Therms = \frac{Sqft * Savings Factor * PF}{100 * AFUE(exist)}$$

Where:

- Sqft = square footage of building controlled by thermostat
- AFUE (exist) = efficiency rating of existing heating equipment (AFUE), in decimal form.
- 100 = converts kBtu to therms, 1 therm = 100 kBtu
- Savings Factor = 9.940 kBtu/sf-yr<sup>160</sup>

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

---

<sup>158</sup> Cooling Savings Factors for the programmable thermostat are calculated as the savings in annual building load divided by the square footage of the small office prototype building (5,500 sf).

<sup>159</sup> This factor is based on consideration of the findings from a number of evaluations, including Sachs et al, “*Field Evaluation of Programmable Thermostats*”, US DOE Building Technologies Program, December 2012, p35; “low proportion of households that ended up using thermostat-enabled energy saving settings”

[http://apps1.eere.energy.gov/buildings/publications/pdfs/building\\_america/field\\_eval\\_thermostats.pdf](http://apps1.eere.energy.gov/buildings/publications/pdfs/building_america/field_eval_thermostats.pdf)20, and Meier et al., “*Usability of residential thermostats: Preliminary investigations*”, Lawrence Berkeley National Laboratory, March 2011, p1; “The majority of occupants operated thermostats manually, rather than relying on their programmable features and almost 90% of respondents reported that they rarely or never adjusted the thermostat to set a weekend or weekday program. Photographs of thermostats were collected in one on-line survey, which revealed that about 20% of the thermostats displayed the wrong time and that about 50% of the respondents set their programmable thermostats on “long term hold” (or its equivalent).”

[http://eec.ucdavis.edu/files/Usability\\_of\\_residential\\_thermostats.pdf](http://eec.ucdavis.edu/files/Usability_of_residential_thermostats.pdf)

<sup>160</sup> Heating Savings Factors for the programmable thermostat are calculated as the savings in annual building load divided by the square footage of the prototype building (5,500 sf) and converted to kBtu.

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.4.9 Steam Trap Replacement or Repair

### DESCRIPTION

This measure applies to the repair or replacement of faulty steam traps on HVAC steam distribution systems. Faulty steam traps allow excess steam to escape, wasting the energy used to generate steam and increasing the amount of steam generated. The measure is applicable to steam systems in commercial, industrial, and multifamily buildings.

This measure was developed to be applicable to the following program type: RF.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

The efficient equipment is a repaired, rebuilt, or replaced steam trap.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a faulty steam trap that needs to be repaired, rebuilt, or replaced as confirmed by a steam trap survey. No minimum leak rate is required.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The life of this measure is 6 years<sup>161</sup>

### DEEMED MEASURE COST

Measure cost depends on customer (commercial or industrial) and maximum steam system operating pressure (psig).

| Steam System                         | Total Installed Cost (per Steam Trap) <sup>162</sup> |
|--------------------------------------|--|
| Commercial (all operating pressures) | \$177  |
| Industrial, $\leq 15$ psig           | \$280  |
| Industrial, $> 15 \leq 30$ psig      | \$300  |
| Industrial, $> 30 \leq 125$ psig     | \$323  |
| Industrial, $> 125 \leq 200$ psig    | \$415  |
| Industrial, $> 200 \leq 250$ psig    | \$275  |
| Industrial, $> 250$ psig             | Custom   |

### LOADSHAPE

Miscellaneous BUS

---

<sup>161</sup>Measure life from Work Paper: Steam Traps Revision #1. Resource Solutions Group, August 2011.

<sup>162</sup>Steam trap costs from Work Paper: Steam Traps Revision #1. Resource Solutions Group, August 2011. Measure cost includes installation cost of \$100 per trap, from Implement a Sustainable Steam-Trap Management Program, America Institute of Chemical Engineers, January 2014.

**Algorithm**

**CALCULATION OF SAVINGS**

**ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS SAVINGS**

$$\Delta Therms = LeakRate \times H_{vap} \times Hours_{Heat} \times \%Leak / EFF_{Heat} / 100,000$$

Where:

LeakRate = Average steam loss rate (lb/hr) per leaking trap  
 =  $24.24 \times (P_{Inlet} + 14.7) \times D^2 \times \%Adjust$

Where:

24.24 = Constant from Napier's equation (lb/(hr-psia-in<sup>2</sup>))

P<sub>Inlet</sub> = Steam trap inlet pressure (psig)  
 = Actual

14.7 = Atmospheric pressure (psia)

D = Diameter of steam trap orifice (in)  
 = Actual

%Adjust = Adjustment factor (%) to reduce the maximum theoretical steam flow to the average steam flow  
 = 50%<sup>163</sup>

H<sub>vap</sub> = Heat of vaporization of steam (Btu/lb)  
 = Use values from table below, based on steam trap inlet pressure (psig)<sup>164</sup>

| P <sub>Inlet</sub> (psig) | H <sub>vap</sub> (Btu/lb) |
|---------------------------|---------------------------|
| 2                         | 966                       |
| 5                         | 960                       |
| 10                        | 952                       |
| 15                        | 945                       |
| 20                        | 939                       |
| 25                        | 934                       |
| 30                        | 929                       |
| 40                        | 926                       |
| 50                        | 912                       |

<sup>163</sup> Enbridge adjustment factor, from Work Paper: Steam Traps Revision #1. Resource Solutions Group, August 2011.

<sup>164</sup> Heat of vaporization values from Steam Tables, Power Plant Service, Inc.

| $P_{\text{Inlet}}$ (psig) | $H_{\text{vap}}$ (Btu/lb) |
|---------------------------|---------------------------|
| 60                        | 905                       |
| 70                        | 898                       |
| 80                        | 892                       |
| 90                        | 886                       |
| 100                       | 880                       |
| 110                       | 875                       |
| 120                       | 871                       |
| 125                       | 868                       |
| 130                       | 866                       |
| 140                       | 862                       |
| 150                       | 857                       |
| 160                       | 853                       |
| 180                       | 845                       |
| 200                       | 834                       |
| 225                       | 829                       |
| 250                       | 820                       |

$\text{Hours}_{\text{Heat}}$  = Custom entry, annual operating hours of steam plant

$\% \text{Leak}$  = Percentage of leaking or blow-through steam traps

= 1.0 when applied to the replacment of an individual leaking trap. If a number of steam traps are replaced and the system has not been audited,  $\% \text{Leak}$  is applied to reflect the assumed percentage of steam traps that were actually leaking and in need of replacement. Use 27% for commerical customers and 16% for industrial customers.<sup>165</sup>

$\text{EFF}_{\text{Heat}}$  = Boiler efficiency (%)

= Custom or if unknown assume 71.9% AFUE.<sup>166</sup>

100,000 = Factor to convert Btus to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>165</sup> % Leak values from Work Paper: Steam Traps Revision #1. Resource Solutions Group, August 2011.

<sup>166</sup> Average nameplate efficiencies of all existing boilers in Ameren, IL PY3-PY4 (2010-2012).

## 2.4.10 Demand Controlled Ventilation

### DESCRIPTION

Demand control ventilation (DCV) automatically adjusts building ventilation rates based on occupancy. DCV is part of a building's ventilation system control strategy. It may include hardware, software, and controls as an integral part of a building's ventilation design. Active control of the ventilation system provides the opportunity to reduce heating and cooling energy use.

The primary component is a control sensor to communicate either directly with the economizer or with a central computer. The component is most typically a carbon dioxide (CO<sub>2</sub>) sensor, occupancy sensor, or turnstile counter. This measure is modeled to assume night time set backs are in operation and minimum outside air is being used when the building is unoccupied.

This measure was developed to be applicable to the following program types: RF. If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

The efficient equipment condition is defined by new CO<sub>2</sub> sensors installed on return air systems where no other sensors were previously installed. Additionally, commissioned control logic and installed hardware must be capable of reducing ventilation rates based on sensor input. For heating savings, this measure does not apply to any system with terminal reheat (constant volume or variable air volume). For terminal reheat system a custom savings calculation should be used.

### DEFINITION OF BASELINE EQUIPMENT

The base case for this measure is a space with no demand control capability. The current code minimum for outside air (OA) is 17 CFM per occupant (ASHRAE 62.1) which is the value assumed in this measure.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The deemed measure life is 10 years.<sup>167</sup>

### DEEMED MEASURE COST

As a retrofit measure, the actual cost of installation should be used for screening. Costs should include the hardware and labor costs to install the sensors. Additional purchase and installation costs for any other component of the DCV system that was not previously existing should also be included.

### LOADSHAPE

Cooling BUS

Heating BUS (only use this loadshape for gas savings)

---

### Algorithm

---

---

<sup>167</sup> Based on CO<sub>2</sub> sensor estimated life, determined through conversations with contractors to have a minimum lifetime of 10 years. It is recommended that they are part of a normal preventive maintenance program, as calibration is an important part of extending useful life. Although they are not subject to mechanical failure, they can fall out of tolerance over time.



**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

For facilities heated by natural gas, cooling savings are:

$$\Delta kWh = SQFT_{cond}/1000 * SF_{cooling}$$

For facilities heated by heat pumps, heating and cooling savings are:

$$\Delta kWh = SQFT_{cond}/1000 * SF_{cooling} + SQFT_{cond}/1000 * SF_{Heat HP}$$

For facilities heated by electric resistance heating and cooling savings are:

$$\Delta kWh = SQFT_{cond}/1000 * SF_{cooling} + SQFT_{cond}/1000 * SF_{Heat ER}$$

Where:

- SQFT<sub>cond</sub> = Square footage of conditioned space commissioned with DCV
- SF<sub>cooling</sub> = Cooling Savings Factor, including cooling and fan energy savings
- SF<sub>Heat HP</sub> = Heating Savings factor for facilities heated by Heat Pump (HP)
- SF<sub>Heat ER</sub> = Heating Savings factor for facilities heated by Electric Resistance (ER)

All Savings Factors are based on building type and weather zone, as listed in the following tables:<sup>168</sup>

| Building Type                  | SF <sub>cooling</sub> (kWh/1000 SqFt)  |                                   |  |                               |                 |                       |   |
|--------------------------------|--|-----------------------------------|--|-------------------------------|-----------------|-----------------------|---|
|                                | North East<br>(Fort<br>Madison,<br>IA) | North<br>West<br>(Lincoln,<br>NE) | South East<br>(Cape<br>Girardeau,<br>MO) | South West<br>(Kaiser,<br>MO) | St Louis,<br>MO | Kansas<br>City,<br>MO | Average/Un<br>known<br>(Knob<br>Noster, MO) |
| Office - Low-rise              | 475                                    | 533                               | 535                                      | 634                           | 649             | 555                   | 579   |
| Office - Mid-rise              | 448                                    | 502                               | 504                                      | 597                           | 611             | 523                   | 545   |
| Office - High-rise             | 468                                    | 525                               | 527                                      | 624                           | 639             | 547                   | 570   |
| Religious Building             | 567                                    | 635                               | 639                                      | 756                           | 774             | 662                   | 690   |
| Restaurant                     | 561                                    | 629                               | 632                                      | 748                           | 765             | 655                   | 683   |
| Retail -<br>Department Store   | 654                                    | 734                               | 737                                      | 873                           | 893             | 764                   | 797   |
| Retail - Strip Mall            | 399                                    | 447                               | 449                                      | 532                           | 544             | 466                   | 486   |
| Convenience Store              | 631                                    | 708                               | 711                                      | 842                           | 862             | 737                   | 769   |
| Elementary School              | 353                                    | 395                               | 397                                      | 470                           | 481             | 412                   | 430   |
| High School                    | 340                                    | 382                               | 384                                      | 454                           | 465             | 398                   | 415   |
| College/University             | 442                                    | 495                               | 498                                      | 589                           | 603             | 516                   | 538   |
| Healthcare Clinic              | 384                                    | 431                               | 433                                      | 513                           | 525             | 449                   | 468   |
| lodging                        | 605                                    | 679                               | 682                                      | 808                           | 827             | 707                   | 738   |
| Manufacturing                  | 500                                    | 560                               | 563                                      | 666                           | 682             | 584                   | 609   |
| Special Assembly<br>Auditorium | 476                                    | 534                               | 536                                      | 635                           | 650             | 556                   | 580   |

<sup>168</sup> Energy savings factors were calculated using weather data and methodology consistent with ASHRAE standards. Savings are calculated on an annual basis for each given weather zone in Missouri. Original energy savings for DCV were developed for Illinois utilizing standards, inputs and approaches as set forth by ASHRAE 62.1 and 90.1. These savings factors were then translated into Missouri-specific values using adjustment factors based on differences in heating and cooling degree hours. See DCV savings factors v1.xlsx for derivation.

| Building Type                  | SF <sub>Heat HP</sub> (kWh/1000 SqFt)  |                                   |  |                               |                 |                       |   |
|--------------------------------|--|-----------------------------------|--|-------------------------------|-----------------|-----------------------|---|
|                                | North East<br>(Fort<br>Madison,<br>IA) | North<br>West<br>(Lincoln,<br>NE) | South East<br>(Cape<br>Girardeau,<br>MO) | South West<br>(Kaiser,<br>MO) | St Louis,<br>MO | Kansas<br>City,<br>MO | Average/Un<br>known<br>(Knob<br>Noster, MO) |
| Office - Low-rise              | 171                                    | 191                               | 145                                      | 151                           | 156             | 176                   | 159   |
| Office - Mid-rise              | 114                                    | 128                               | 97                                       | 100                           | 104             | 117                   | 106   |
| Office - High-rise             | 154                                    | 172                               | 130                                      | 135                           | 140             | 158                   | 143   |
| Religious Building             | 1,118                                  | 1,248                             | 945                                      | 983                           | 1,018           | 1,149                 | 1,036                                       |
| Restaurant                     | 799                                    | 892                               | 675                                      | 702                           | 727             | 821                   | 740   |
| Retail -<br>Department Store   | 277                                    | 310                               | 234                                      | 244                           | 252             | 285                   | 257   |
| Retail - Strip Mall            | 184                                    | 205                               | 155                                      | 161                           | 167             | 189                   | 170   |
| Convenience Store              | 134                                    | 150                               | 114                                      | 118                           | 122             | 138                   | 125   |
| Elementary School              | 475                                    | 531                               | 402                                      | 418                           | 433             | 488                   | 440   |
| High School                    | 465                                    | 519                               | 393                                      | 409                           | 423             | 478                   | 431   |
| College/University             | 923                                    | 1,031                             | 780                                      | 812                           | 840             | 949                   | 856   |
| Healthcare Clinic              | 331                                    | 370                               | 280                                      | 291                           | 301             | 340                   | 307   |
| lodging                        | 157                                    | 175                               | 132                                      | 138                           | 143             | 161                   | 145   |
| Manufacturing                  | 122                                    | 136                               | 103                                      | 107                           | 111             | 125                   | 113   |
| Special Assembly<br>Auditorium | 1,335                                  | 1,490                             | 1,128                                    | 1,173                         | 1,215           | 1,371                 | 1,236                                       |

| Building Type                  | SF <sub>Heat ER</sub> (kWh/1000 SqFt)  |                                |  |                               |                 |                       |  |
|--------------------------------|--|--------------------------------|--|-------------------------------|-----------------|-----------------------|--|
|                                | North East<br>(Fort<br>Madison,<br>IA) | North West<br>(Lincoln,<br>NE) | South East<br>(Cape<br>Girardeau,<br>MO) | South West<br>(Kaiser,<br>MO) | St Louis,<br>MO | Kansas<br>City,<br>MO | Average/Unk<br>nown (Knob<br>Noster, MO) |
| Office - Low-rise              | 514                                    | 574                            | 434                                      | 452                           | 468             | 528                   | 476                                      |
| Office - Mid-rise              | 343                                    | 383                            | 290                                      | 301                           | 312             | 352                   | 318                                      |
| Office - High-rise             | 461                                    | 515                            | 390                                      | 406                           | 420             | 474                   | 428                                      |
| Religious Building             | 3,354                                  | 3,744                          | 2,835                                    | 2,948                         | 3,053           | 3,446                 | 3,108                                    |
| Restaurant                     | 2,396                                  | 2,675                          | 2,025                                    | 2,106                         | 2,181           | 2,462                 | 2,220                                    |
| Retail -<br>Department Store   | 832                                    | 929                            | 703                                      | 731                           | 757             | 855                   | 771                                      |
| Retail - Strip Mall            | 551                                    | 615                            | 465                                      | 484                           | 501             | 566                   | 510                                      |
| Convenience Store              | 403                                    | 450                            | 341                                      | 354                           | 367             | 414                   | 374                                      |
| Elementary School              | 1,426                                  | 1,592                          | 1,205                                    | 1,253                         | 1,298           | 1,465                 | 1,321                                    |
| High School                    | 1,395                                  | 1,557                          | 1,179                                    | 1,226                         | 1,270           | 1,433                 | 1,292                                    |
| College/University             | 2,770                                  | 3,093                          | 2,341                                    | 2,435                         | 2,521           | 2,846                 | 2,567                                    |
| Healthcare Clinic              | 993                                    | 1,109                          | 839                                      | 873                           | 904             | 1,020                 | 920                                      |
| lodging                        | 470                                    | 525                            | 397                                      | 413                           | 428             | 483                   | 436                                      |
| Manufacturing                  | 365                                    | 408                            | 309                                      | 321                           | 332             | 375                   | 338                                      |
| Special Assembly<br>Auditorium | 4,004                                  | 4,470                          | 3,384                                    | 3,519                         | 3,644           | 4,114                 | 3,709                                    |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

Energy savings from DCV occurs when occupancy levels are below design levels. Given that occupancy patterns may not always be predictable and the general expectation is that the coincident peak demand period will coincide with periods of highest occupancy, no peak demand savings should be assumed to result from this DCV measure. In instances where peak demand savings can be substantiated, a custom analysis should be used.

**NATURAL GAS SAVINGS**

$$\Delta\text{Therms} = \text{SQFT}_{\text{cond}}/1000 * \text{SF}_{\text{Heat Gas}}$$

Where:

$\text{SF}_{\text{Heat Gas}}$  = Savings factor for facilities heated by natural gas, as listed in the following table:

| Building Type               | SF <sub>Heat Gas</sub> (Therm/1000 sq ft) |                          |                                 |                         |              |                 |                                   |
|-----------------------------|---|--------------------------|---------------------------------|-------------------------|--------------|-----------------|-----------------------------------|
|                             | North East (Fort Madison, IA)             | North West (Lincoln, NE) | South East (Cape Girardeau, MO) | South West (Kaiser, MO) | St Louis, MO | Kansas City, MO | Average/Unknown (Knob Noster, MO) |
| Office - Low-rise           | 22  | 24                       | 19                              | 19                      | 20           | 23              | 20                                |
| Office - Mid-rise           | 15  | 16                       | 12                              | 13                      | 13           | 15              | 14                                |
| Office - High-rise          | 20  | 22                       | 17                              | 17                      | 18           | 20              | 18                                |
| Religious Building          | 143                                       | 160                      | 121                             | 126                     | 130          | 147             | 133                               |
| Restaurant                  | 102                                       | 114                      | 86                              | 90                      | 93           | 105             | 95                                |
| Retail - Department Store   | 35  | 40                       | 30                              | 31                      | 32           | 36              | 33                                |
| Retail - Strip Mall         | 23  | 26                       | 20                              | 21                      | 21           | 24              | 22                                |
| Convenience Store           | 17  | 19                       | 15                              | 15                      | 16           | 18              | 16                                |
| Elementary School           | 61  | 68                       | 51                              | 53                      | 55           | 62              | 56                                |
| High School                 | 60  | 66                       | 50                              | 52                      | 54           | 61              | 55                                |
| College/University          | 118                                       | 132                      | 100                             | 104                     | 108          | 121             | 109                               |
| Healthcare Clinic           | 42  | 47                       | 36                              | 37                      | 39           | 44              | 39                                |
| Lodging                     | 20  | 22                       | 17                              | 18                      | 18           | 21              | 19                                |
| Manufacturing               | 16  | 17                       | 13                              | 14                      | 14           | 16              | 14                                |
| Special Assembly Auditorium | 171                                       | 191                      | 144                             | 150                     | 155          | 175             | 158                               |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.4.11 Furnace

### DESCRIPTION

This measure applies to the installation of a high-efficiency, gas furnace in a commercial or multifamily space. High-efficiency gas furnaces achieve savings through the use of a sealed, super insulated combustion chamber, more efficient burners, and multiple heat exchangers that remove a significant portion of the waste heat from the flue gasses. Because multiple heat exchangers are used to remove waste heat from the escaping flue gasses, most of the flue gasses condense and must be drained.

This measure was developed to be applicable to the following program type: TOS.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a new furnace with an annual fuel utilization efficiency (AFUE) or thermal efficiency ( $E_T$ ) rating that meets the minimum standards according to utility program requirements.

### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is a new furnace with an AFUE or  $E_T$  rating that meets minimum federal energy efficiency standards.

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 19 years.<sup>169</sup>

### DEEMED MEASURE COST

The incremental capital cost for this measure depends on furnace efficiency and capacity, as listed in the table below.<sup>170</sup>

| Furnace Capacity | Efficiency | Incremental Equipment Cost (Per Unit) | Incremental Total Installed Cost (Per Unit) |
|------------------|------------|---------------------------------------|---|
| <225,000 Btu/hr  | 90% AFUE   | \$163.16                              | \$477.93                                    |
|                  | 92% AFUE   | \$179.19                              | \$493.96                                    |
|                  | 95% AFUE   | \$313.45                              | \$628.22                                    |
|                  | 98% AFUE   | \$505.76                              | \$820.53                                    |
| ≥225,000 Btu/hr  | 92% $E_T$  | \$1,371.96                            | \$1,752.75                                  |

### LOADSHAPE

Heating BUS

<sup>169</sup> Average of 15-year lifetime from Residential Heating and Cooling Systems Initiative Description. Consortium for Energy Efficiency, May 28, 2015 and 23-year lifetime from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Commercial Warm Air Furnaces. U.S. Department of Energy, December 15, 2015.

<sup>170</sup> For furnaces with input <225,000 Btu/hr, incremental costs are from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Residential Furnaces. U.S. Department of Energy, February 10, 2015. For furnaces ≥225,000 Btu/hr, incremental costs are from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Commercial Warm Air Furnaces. U.S. Department of Energy, December 15, 2015.

---

**Algorithm**

---

**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{EFF_{EE} - EFF_{Base}}{EFF_{Base}} \right)}{100,000}$$

Where:

- EFLH = Equivalent full load hours for heating  
= See table at the beginning of section 2.4 HVAC End Use. A custom value may also be used.
- Capacity = Nominal heating input capacity (Btu/hr) of efficient furnace  
= Actual
- EFF<sub>EE</sub> = Efficiency rating of high efficiency furnace  
= Actual
- EFF<sub>Base</sub> = Efficiency rating of baseline furnace  
= 80% AFUE for furnaces <225,000 Btu/hr<sup>171</sup> and 85% E<sub>T</sub> for furnaces ≥225,000 Btu/hr<sup>172</sup>
- 100,000 = Factor to convert Btus to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>171</sup> Federal efficiency standard for furnaces <225,000 Btu/hr from 10 CFR 430.32 is 80% AFUE.

<sup>172</sup> Federal efficiency standard for furnaces ≥225,000 Btu/hr from 10 CFR 431.77 is 85% E<sub>T</sub>.

## 2.4.12 Boiler/Furnace Tune-up

### DESCRIPTION

This measure entails a tune-up for a natural gas boiler or furnace that provides space and/or process heating in a nonresidential application. The tune-up will improve boiler/furnace efficiency and verify safe operation through a culmination of service procedures. Combustion efficiency should be measured before and after tune-up using an electronic flue gas analyzer.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

The recommended actions the tune up technician should take are as follows:

#### Boiler:

- Measure combustion efficiency using an electronic flue gas analyzer.
- Adjust airflow and reduce excessive stack temperatures.
- Adjust burner and gas input, manual or motorized draft control.
- Check for proper venting.
- Complete visual inspection of system piping and insulation.
- Check safety controls.
- Check adequacy of combustion air intake.
- Clean fireside surfaces.
- Inspect all refractory. Patch and wash coat as required.
- Inspect gaskets on front and rear doors and replace as necessary.
- Seal and close front and rear doors properly.
- Clean low and auxiliary low water cut-off controls, then re-install using new gaskets.
- Clean plugs in control piping.
- Remove all hand hole and man hole plates. Flush boiler with water to remove loose scale and sediment.
- Replace all hand hole and man hole plates with new gaskets.
- Open feedwater tank manway, inspect and clean as required. Replace manway plate with new gasket.
- Clean burner and burner pilot.
- Check pilot electrode and adjust or replace.
- Clean air damper and blower assembly.
- Clean motor starter contacts and check operation.
- Make necessary adjustments to burner for proper combustion.
- Perform all flame safeguard and safety trip checks.
- Check all hand hole plates and man hole plates for leaks at normal operating temperatures and pressures.
- Troubleshoot any boiler system problems as requested by on-site personnel.
- Verify boiler delta T is within system design limits.

#### Furnace:

- Measure combustion efficiency using an electronic flue gas analyzer.
- Check and clean blower assembly and components per manufacturer's recommendations.
- Where applicable, lubricate motor and inspect and replace fan belt if required.
- Inspect for gas leaks.

- Clean burner per manufacturer’s recommendations and adjust as needed.
- Check ignition system and safety systems and clean and adjust as needed.
- Check and clean heat exchanger per manufacturer’s recommendations.
- Inspect exhaust/flue for proper attachment and operation.
- Inspect control box, wiring, and controls for proper connections and performance.
- Check air filter and clean or replace per manufacturer’s recommendations.
- Inspect duct work connected to furnace for leaks or blockages.
- Measure temperature rise and adjust flow as needed.
- Check for correct line and load volts/amps.
- Check that thermostat operation is per manufacturer’s recommendations.
- Perform Carbon Monoxide test and adjust heating system until results are within standard industry acceptable limits.
- Check and adjust gas input.
- Check high limit and other safety controls.

**DEFINITION OF BASELINE EQUIPMENT**

The baseline condition is a boiler or furnace that has not had a tune-up in the past 24 months.

**DEEMED LIFETIME OF EFFICIENT EQUIPMENT**

Measure life is considered to be two years, although annual tune-ups are generally a recommended best-practice.

**DEEMED MEASURE COST**

The cost of this measure is the actual tune up cost, which can vary based on the extent of the service required.

**LOADSHAPE**

Heating BUS

---

**Algorithm**

---

**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS SAVINGS**

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{(Eff_{pre} + E_i)}{Eff_{pre}} - 1 \right)}{100,000}$$

Where:

EFLH = Equivalent full load hours for heating

|                    |  |
|--------------------|--|
|                    | = See table at the beginning of section 2.4 HVAC End Use. A custom value may also be used.   |
| Capacity           | = Nominal heating input capacity (Btu/hr) of efficient furnace<br>= Actual   |
| Eff <sub>pre</sub> | = Combustion Efficiency of the boiler before the tune-up<br>= Actual   |
| E <sub>i</sub>     | = Combustion Efficiency Improvement of the boiler tune-up measure <sup>173</sup><br>= Actual, informed by flue gas analysis and any additional considerations <sup>174</sup> |
| 100,000            | = Converts Btu to therms   |

#### WATER IMPACT DESCRIPTIONS AND CALCULATION

N/A

#### DEEMED O&M COST ADJUSTMENT CALCULATION

While there is likely to be some O&M cost savings due to reduced service calls, increased equipment life, etc., these will only be realized with a regular maintenance schedule, which cannot be assumed for each individual tune-up measure. This benefit is therefore conservatively excluded.

---

<sup>173</sup> The percentage improvement in combustion efficiency is deemed a reasonable proxy for the system improvement. If a full thermal efficiency test is performed instead, that should be used.

<sup>174</sup> Fuel-air ratios of furnaces and boilers can be either too lean or too rich, either of which reduces the combustion efficiency of the gas-fired equipment. When fuel-air ratios are too rich, correcting the mixture to improve combustion efficiency can actually lead to a decrease in the post-tune up efficiency reading of electronic flue gas analyzer tests (maybe analyzer dependent). When rich fuel-air ratios are corrected, detectable carbon monoxide (CO) or unburned hydrocarbons (HC) levels will decrease, indicating a more complete combustion. Yet the excess air needed for the complete combustion can often be registered as a decrease in the efficiency reading of the flue gas analyzer. Thus, flexibility is given to use other suitable mechanisms to assess pre/post combustion efficiencies.



## 2.5 Shell End Use

### 2.5.1 Air Sealing

#### DESCRIPTION

Thermal shell air leaks are sealed through strategic use and location of air-tight materials. An estimate of savings is provided in two ways. It is highly recommended that leaks be detected and pre- and post-sealing leakage rates measured with the assistance of a blower-door by qualified/certified inspectors.<sup>175</sup> Where this occurs, an algorithm is provided to estimate the site specific savings. Where test in/test out has not occurred, a conservative deemed assumption is provided.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

Air sealing materials and diagnostic testing should meet all eligibility program qualification criteria. The initial and final tested leakage rates should be assessed in such a manner that the identified reductions can be properly discerned, particularly in situations wherein multiple building envelope measures may be implemented simultaneously.

#### DEFINITION OF BASELINE EQUIPMENT

The existing air leakage should be determined through approved and appropriate test methods using a blower door. The baseline condition of a building upon first inspection significantly affects the opportunity for cost-effective energy savings through air sealing.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 15 years.<sup>176</sup>

#### DEEMED MEASURE COST

The actual capital cost for this measure should be used.

#### LOADSHAPE

Heating BUS

---

#### Algorithm

---

Calculation of Savings

#### NATURAL GAS SAVINGS

##### Test In / Test Out Approach

If Natural Gas heating:

$$\Delta Therms = \frac{(CFM50_{Pre} - CFM50_{Post}) * 60 * 24 * HDD * 0.018}{N_{heat} * (\eta_{Heat} * 100,000)}$$

---

<sup>175</sup> Refer to the Energy Conservatory Blower Door Manual for more information on testing methodologies.

<sup>176</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007.

Where:

N\_heat = Conversion factor from leakage at 50 Pascal to leakage at natural conditions  
 = Based on location and building height:<sup>177</sup>

| Climate Zone<br>(City based upon) | N_heat (by # of stories) |      |      |      |
|-----------------------------------|--------------------------|------|------|------|
|                                   | 1                        | 1.5  | 2    | 3    |
| North East (Fort Madison, IA)     | 24.9                     | 22.1 | 20.2 | 17.9 |
| North West (Lincoln, NE)          | 23.0                     | 20.4 | 18.7 | 16.6 |
| South East (Cape Girardeau, MO)   | 25.7                     | 22.8 | 20.9 | 18.5 |
| South West (Kaiser, MO)           | 26.6                     | 23.6 | 21.6 | 19.2 |
| St Louis, MO                      | 24.0                     | 21.3 | 19.5 | 17.3 |
| Kansas City, MO                   | 22.6                     | 20.0 | 18.4 | 16.3 |
| Average/Unknown (Knob Noster)     | 23.8                     | 21.1 | 19.3 | 17.1 |

HDD = Heating Degree Days  
 = Dependent on location:<sup>178</sup>

| Climate Zone (City based upon)                                     | HDD <sup>179</sup> |
|--|--------------------|
| North East (Fort Madison, IA)                                      | 4475               |
| North West (Lincoln, NE)   | 4905               |
| South East (Cape Girardeau, MO)                                    | 3368               |
| South West (Kaiser, MO)  | 3561               |
| St Louis, MO   | 4486               |
| Kansas City, MO  | 4059               |
| Average/Unknown (Knob Noster)                                      | 4037               |
| Ameren Missouri Natural Gas (Weighted Columbia and Cape Girardeau) | 4,866              |

<sup>177</sup> N-factor is used to convert 50-pascal blower door air flows to natural air flows and is dependent on geographic location and # of stories. These were developed by applying the LBNL infiltration model (see LBNL paper 21040, *Exegisis of Proposed ASHRAE Standard 119: Air Leakage Performance for Detached Single-Family Residential Buildings*; Sherman, 1986; page v-vi, Appendix page 7-9) to the reported wind speeds and outdoor temperatures provided by the NRDC 30 year climate normals. For more information see Bruce Harley, CLEAResult “Infiltration Factor Calculations Methodology.doc” and calculation worksheets.

<sup>178</sup> The calculations made in this measure have been based on using Climate Normals data with a base temp of 60°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.

<sup>179</sup> HDD values based on 60 degrees except for St. Louis and Ameren Missouri Natural Gas which are based on 65 degrees

$\eta_{Heat}$  = Efficiency of heating system  
 = Equipment efficiency \* distribution efficiency  
 = Actual<sup>180</sup> - If not available, use 71%<sup>181</sup>

Other factors as defined above

Conservative Deemed Approach

$$\Delta Therms = SavingsPerUnit * SqFt$$

Where:

SavingsPerUnit = Annual savings per square foot, dependent on heating / cooling equipment<sup>182</sup>

| Building Type  | HVAC System | SavingsPerUnit (Therms/ft) |
|----------------|-------------|----------------------------|
| Small Business | Gas Furnace | 0.013                      |
| Manufactured   | Gas Boiler  | 0.022                      |
| Multifamily    | Gas Boiler  | 0.018                      |
| Single Family  | Gas Boiler  | 0.016                      |
| Manufactured   | Gas Furnace | 0.017                      |
| Multifamily    | Gas Furnace | 0.012                      |
| Single Family  | Gas Furnace | 0.013                      |

SqFt = Building square footage  
 = Actual

---

<sup>180</sup> Ideally, the System Efficiency should be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

<sup>181</sup> This has been estimated assuming that natural gas central furnace heating is typical for Missouri residences (the predominant heating is gas furnace with 48% of Missouri homes (based on Energy Information Administration, 2009 Residential Energy Consumption Survey). In 2000, 29% of furnaces purchased in Missouri were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment - see Furnace Penetration.xls). Furnaces tend to last up to 20 years and so units purchased 16 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non-condensing furnaces and duct losses, the average heating system efficiency is estimated as follows:  $((0.29*0.92) + (0.71*0.8)) * (1-0.15) = 0.71$ .

<sup>182</sup> The values in the table represent estimates of savings from a 15% improvement in air leakage. The values are half those provided by Cadmus for the Iowa Joint Assessment, based on building simulations performed. While 30% savings are certainly achievable, this represents a thorough job in both the attic and basements and could not be verified without testing. The conservative 15% estimate is more appropriate for a deemed estimate. These values should be re-evaluated if EM&V values provide support for a higher deemed estimate.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 2.5.2 Windows

### DESCRIPTION

Energy and demand saving are realized through the installation of windows that offer performance improvements over baseline windows. Savings may be realized from reducing air infiltration, improved insulating properties, and changes to solar heat gain through the glazed surfaces of the building.

This measure was developed to be applicable to the following program types: RF and NC.

If applied to other program types, the measure savings should be verified.

### DEFINITION OF EFFICIENT EQUIPMENT

In order for this characterization to apply, the efficient equipment is assumed to exceed the efficiency requirements defined by the program.

### DEFINITION OF BASELINE EQUIPMENT

In order for this characterization to apply, the baseline is assumed to meet the efficiency requirements set forth by local jurisdictions. In most cases, this will be some version of International Energy Conservation Code (IECC). For retrofit applications, the baseline condition is the existing condition and requires assessment of the existing window assemblies.

Local code shall be referenced to define baseline where applicable. As an example, the following is set forth by IECC 2012. An efficient window would have specifications not exceeding these values.

|                         | Climate Zones 4 & 5            |
|-------------------------|--------------------------------|
| <b>U-Factor</b>         |                                |
| <i>Fixed Windows</i>    | 0.38 Btu/ft <sup>2</sup> .°F.h |
| <i>Operable Windows</i> | 0.45 Btu/ft <sup>2</sup> .°F.h |
| <b>SHGC</b>             | 0.40                           |

### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 20 years.<sup>183</sup>

### DEEMED MEASURE COST

For retrofit projects, full installation costs should be used, including both material and labor costs to install the windows.

In all other scenarios, the incremental cost for this measure is assumed to be \$1.50 per square foot of window area.<sup>184</sup>

### LOADSHAPE

Cooling BUS

Heating BUS (only use this loadshape for gas savings)

---

<sup>183</sup> Consistent with window measure lives specified by Ameren Missouri and KCP&L.

<sup>184</sup> Alliance to Save Energy Efficiency Windows Collaborative Report, December 2007. Consistent with other market reports.

**Algorithm**

**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Electric energy savings is calculated as the sum of energy saved when cooling the building and energy saved when heating the building.

$$\Delta kWh = \Delta kWh_{cooling} + \Delta kWh_{heating}$$

Heating and cooling savings are composed of three components: infiltration, conduction and solar gains. In instances where infiltration savings do not apply or are not eligible, it may be disregarded.

If central cooling, the electric energy saved in annual cooling due to the added insulation is:

$$\begin{aligned} \Delta kWh_{cooling} &= Infiltration_{cooling} + Conduction_{cooling} + Solar_{cooling} \\ &= \frac{(CFM_{Pre} - CFM_{Post}) * 60 * EFLH_{cooling} * \Delta T_{AVG,cooling} * 0.018 * LM}{(1000 * \eta_{cooling})} \end{aligned}$$

CFM<sub>Pre</sub> = Infiltration at natural conditions as estimated by blower door testing before window upgrade

= Actual

CFM<sub>Post</sub> = Infiltration at natural conditions as estimated by blower door testing after window upgrade

= Actual

60 = Converts Cubic Feet per Minute to Cubic Feet per Hour

EFLH<sub>cooling</sub> = Equivalent Full Load Hours for Cooling [hr] are provided in Section 2.4, HVAC End Use

$\Delta T_{AVG,cooling}$  = Average temperature difference [°F] during cooling season between outdoor air temperature and assumed 75°F indoor air temperature, dependent on location:

| Climate Zone<br>(City based upon) | OA <sub>AVG,cooling</sub><br>[°F] <sup>185</sup> | $\Delta T_{AVG,cooling}$<br>[°F] |
|-----------------------------------|--|----------------------------------|
| North East (Fort Madison, IA)     | 76.2   | 1.2                              |
| North West (Lincoln, NE)          | 78.8   | 3.8                              |
| South East (Cape Girardeau, MO)   | 79.4   | 4.4                              |
| South West (Kaiser, MO)           | 81.3   | 6.3                              |
| St Louis, MO                      | 80.8   | 5.8                              |
| Kansas City, MO                   | 79.0   | 4.0                              |
| Average/Unknown (Knob Noster)     | 80.7   | 5.7                              |

<sup>185</sup> National Solar Radiation Data Base -- 1991- 2005 Update: Typical Meteorological Year 3 [http://rredc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/by\\_state\\_and\\_city.html](http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/by_state_and_city.html) . Heating Season defined as September 17<sup>th</sup> through April 13<sup>th</sup>, cooling season defined as May 20 through August 15<sup>th</sup>. For cooling season, temperatures from 8AM to 8PM were used to establish average temperatures as this is when cooling systems are expected to be loaded.

- 0.018 = Specific Heat Capacity of Air (Btu/ft<sup>3</sup> °F)  
 LM = Latent multiplier to account for latent cooling demand  
 = dependent on location:<sup>186</sup>

| Climate Zone (City based upon)  | LM  |
|---------------------------------|-----|
| North East (Fort Madison, IA)   | 5.1 |
| North West (Lincoln, NE)        | 3.5 |
| South East (Cape Girardeau, MO) | 4.5 |
| South West (Kaiser, MO)         | 3.7 |
| St Louis, MO                    | 3.0 |
| Kansas City, MO                 | 4.0 |
| Average/Unknown (Knob Noster)   | 3.2 |

- 1,000 = Conversion from Btu to kBtu  
 $\eta_{cooling}$  = Seasonal energy efficiency ratio (SEER) of cooling system (kBtu/kWh)  
 = Actual

$$Conduction_{cooling} = \frac{(U_{base} - U_{eff}) * A_{window} * EFLH_{cooling} * \Delta T_{AVG,cooling}}{(1,000 * \eta_{cooling})}$$

Where:

- $U_{base}$  = U-factor value of baseline window assembly (Btu/ft<sup>2</sup>.°F.h)  
 = Dependent on climate zone and window type. See table below for IECC2012 requirements:  
 $U_{eff}$  = U-factor value of the efficient window assembly (Btu/ft<sup>2</sup>.°F.h)  
 = Actual.  
 $A_{window}$  = Area of insulated window (including visible frame and glass) (ft<sup>2</sup>)

Other variables as defined above.

$$Solar_{cooling} = \frac{(SHGC_{base} - SHGC_{eff}) * A_{window} * \psi_{cooling}}{(1,000 * \eta_{cooling})}$$

Where:

- $SHGC_{base}$  = Solar Heat Gain Coefficient of the baseline window assembly (fractional)

<sup>186</sup> The Latent Multiplier is used to convert the sensible cooling savings calculated to a value representing sensible and latent cooling loads. The values are derived from the methodology outlined in Infiltration Factor Calculation Methodology by Bruce Harley, Senior Manager, Applied Building Science, CLEARResult 11/18/2015 and is based upon an 8760 analysis of sensible and total heat loads using hourly climate data.

$SHGC_{eff}$  (fractional) = Solar Heat Gain Coefficient of the efficient window assembly

$\Psi_{cooling}$  = Incident solar radiation during the cooling season (Btu/ft<sup>2</sup>)  
 = Based on location:<sup>187</sup>

| Climate Zone (City based upon)  | $\Psi_{cooling}$ |
|---------------------------------|------------------|
| North East (Fort Madison, IA)   | 42062            |
| North West (Lincoln, NE)        | 42322            |
| South East (Cape Girardeau, MO) | 40266            |
| South West (Kaiser, MO)         | 45222            |
| St Louis, MO                    | 40996            |
| Kansas City, MO                 | 44843            |
| Average/Unknown (Knob Noster)   | 45892            |

Other variables as defined above.

If the building is heated with electric heat (resistance or heat pump), the electric energy saved in annual heating due to the window upgrade is:

$$\Delta kWh_{heating} = Infiltration_{heating} + Conduction_{heating} - Solar_{heating}$$

$$= \frac{Infiltration_{heating} (CFM_{Pre} - CFM_{Post}) * 60 * EFLH_{heating} * \Delta T_{AVG,heating} * 0.018}{(3,412 * \eta_{heating})}$$

Where:

$EFLH_{heating}$  = Equivalent Full Load Hours for Heating [hr] are provided in Section 2.4, HVAC end use

$\Delta T_{AVG,heating}$  = Average temperature difference [°F] during heating season between outdoor air temperature and assumed 55°F heating base temperature

| Climate Zone (City based upon)  | $OA_{AVG,heating}$ [°F] <sup>188</sup> | $\Delta T_{AVG,heating}$ [°F] |
|---------------------------------|--|-------------------------------|
| North East (Fort Madison, IA)   | 42.1                                   | 12.9                          |
| North West (Lincoln, NE)        | 39.0                                   | 16.0                          |
| South East (Cape Girardeau, MO) | 45.7                                   | 9.3                           |
| South West (Kaiser, MO)         | 45.0                                   | 10.0                          |
| St Louis, MO                    | 43.2                                   | 11.8                          |
| Kansas City, MO                 | 40.3                                   | 14.7                          |
| Average/Unknown (Knob Noster)   | 43.4                                   | 11.6                          |

<sup>187</sup> See “Windows SHG.xlsx” for derivation.

<sup>188</sup> National Solar Radiation Data Base -- 1991- 2005 Update: Typical Meteorological Year 3 [http://rredc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/by\\_state\\_and\\_city.html](http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/by_state_and_city.html) . Heating Season defined as September 17<sup>th</sup> through April 13<sup>th</sup>, cooling season defined as May 20 through August 15<sup>th</sup>. For cooling season, temperatures from 8AM to 8PM were used to establish average temperatures as this is when cooling systems are expected to be loaded.



- 3,412 = Conversion from Btu to kWh.
- $\eta_{\text{heating}}$  = Efficiency of heating system  
= Actual. Note: electric resistance heating and heat pumps will have an efficiency greater than or equal to 100%

Other variables as defined above.

$$\text{Conduction}_{\text{heating}} = \frac{(U_{\text{base}} - U_{\text{eff}}) * A_{\text{window}} * EFLH_{\text{heating}} * \Delta T_{\text{AVG,heating}}}{(3,412 * \eta_{\text{heating}})}$$

Variables as defined above.

$$\text{Solar}_{\text{heating}} = \frac{(SHGC_{\text{base}} - SHGC_{\text{eff}}) * A_{\text{window}} * \Psi_{\text{heating}}}{(3,412 * \eta_{\text{heating}})}$$

Where:

- $\Psi_{\text{heating}}$  = Incident solar radiation during the heading season (Btu/ft<sup>2</sup>)  
= Based on location:

| Climate Zone (City based upon)  | $\Psi_{\text{cooling}}$ |
|---------------------------------|-------------------------|
| North East (Fort Madison, IA)   | 70736                   |
| North West (Lincoln, NE)        | 74390                   |
| South East (Cape Girardeau, MO) | 72519                   |
| South West (Kaiser, MO)         | 70498                   |
| St Louis, MO                    | 66592                   |
| Kansas City, MO                 | 78501                   |
| Average/Unknown (Knob Noster)   | 68653                   |

Other variables as defined above.

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{\text{cooling}} * CF$$

Where:

- $\Delta kWh_{\text{cooling}}$  = Annual electricity savings for cooling, as calculated above
- CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor for Cooling  
= 0.000910684

**NATURAL GAS SAVINGS**

If building uses a gas heating system, the savings resulting from the window assembly is calculated with the following formula.

$$\Delta \text{Therms} = \text{Infiltration}_{\text{gasheating}} + \text{Conduction}_{\text{gasheating}} - \text{Solar}_{\text{gasheating}}$$

$$\begin{aligned} & Infiltration_{gasheating} \\ = & \frac{(CFM_{Pre} - CFM_{Post}) * 60 * EFLH_{heating} * \Delta T_{AVG,heating} * 0.018}{(100,000 * \eta_{heat})} \end{aligned}$$

Where:

100,000 = Conversion from BTUs to Therms

$\eta_{heat}$  = Efficiency of heating system

= Actual

*Other variables as defined above.*

$$\begin{aligned} & Conduction_{gasheating} \\ = & \frac{(U_{base} - U_{eff}) * A_{window} * EFLH_{heating} * \Delta T_{AVG,heating}}{(100,000 * \eta_{heat})} \end{aligned}$$

$$\begin{aligned} & Solar_{gasheating} \\ = & \frac{(SHGC_{base} - SHGC_{eff}) * A_{window} * \psi_{heating}}{(100,000 * \eta_{heat})} \end{aligned}$$

Variables as defined above.

#### **WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

#### **DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

### **2.5.3 Ceiling and Wall Insulation**

#### **DESCRIPTION**

Energy and demand saving are realized through reductions in the building cooling and heating loads.

This measure was developed to be applicable to the following program types: RF and NC.

If applied to other program types, the measure savings should be verified.

#### **DEFINITION OF EFFICIENT EQUIPMENT**

In order for this characterization to apply, the efficient equipment is assumed to exceed the efficiency requirements defined by the program.

#### **DEFINITION OF BASELINE EQUIPMENT**

In order for this characterization to apply, the baseline is assumed to meet the efficiency requirements set forth by local jurisdictions. In most cases, this will be some version of International Energy Conservation Code (IECC). For retrofit applications, the baseline condition is the existing condition and requires assessment of the existing insulation. It should be based on the entire wall assembly.

Local code shall be referenced to define baseline where applicable. As an example, the following is set forth by IECC 2012:

| ASHRAE/IECC Climate Zone 5<br>(A, B, C) Nonresidential |                     |                            |
|--|---------------------|----------------------------|
|  | Assembly<br>Maximum | Insulation Min.<br>R-Value |
| Mass   | U-0.078             | R-11.4 ci                  |
| Metal Building   | U-0.052             | R-13 + R-13 ci             |
| Metal Framed   | U-0.064             | R-13 + R-7.5 ci            |
| Wood Framed<br>and Other                               | U-0.064             | R-13 + R-3.8 ci<br>or R-20 |

| ASHRAE/IECC Climate Zone 6<br>(A, B, C) Nonresidential |                     |  |
|--|---------------------|--|
|  | Assembly<br>Maximum | Insulation Min.<br>R-Value               |
| Mass   | U-0.078             | R-13.1 ci                                |
| Metal Building   | U-0.052             | R-13 + R-13 ci                           |
| Metal Framed   | U-0.064             | R-13 + R-7.5 ci                          |
| Wood Framed<br>and Other                               | U-0.051             | R-13 + R-7.5 ci<br>or R-20 + R-3.8<br>ci |

Note: ci = continuous insulation

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The measure expected useful life (EUL) is assumed to be 20 years per DEER 2008. This is consistent with SDG&E’s 9th Year Measure Retrofit Study (1996 & 1997 Residential Weatherization Programs), CPUC’s Energy Efficiency Policy Manual v.2, and GDS’s Measure Life Report Residential and Commercial/Industrial Lighting and HVAC Measures (June 2007).

#### DEEMED MEASURE COST

For retrofit projects, full installation costs should be used.

For new construction projects, costs should be limited to incremental material and labor costs associated with the portion of insulation that exceeds code requirements.

#### LOADSHAPE

##### HVAC BUS

Heating BUS (only use this loadshape for gas savings)

---



---

### Algorithm

---



---

#### CALCULATION OF ENERGY SAVINGS

##### ELECTRIC ENERGY SAVINGS

Electric energy savings is calculated as the sum of energy saved when cooling the building and energy saved when heating the building

$$\Delta kWh = \Delta kWh_{cooling} + \Delta kWh_{heating}$$

If central cooling, the electric energy saved in annual cooling due to the added insulation is

$$\Delta kWh_{cooling} = \frac{\left(\frac{1}{R_{existing}} - \frac{1}{R_{new}}\right) * Area * CRF * EFLH_{cooling} * \Delta T_{AVG,cooling}}{(1,000 * \eta_{cooling})}$$

Where:

- $R_{existing}$  = Assembly heat loss coefficient with existing insulation [(hr-°F-ft²)/Btu]
- $R_{new}$  = Assembly heat loss coefficient with new insulation [(hr-°F-ft²)/Btu]
- Area = Area of the surface in square feet.
- CRF = Correction Factor. Adjustment to account for the effects the framing has on the overall assembly R-value, when cavity insulation is used.
  - = 100% if Spray Foam or External Rigid Foam
  - = 50% if studs and cavity insulation<sup>189</sup>
- $EFLH_{cooling}$  = Equivalent Full Load Hours for Cooling [hr] are provided in Section 2.4, HVAC End Use

$\Delta T_{AVG,cooling}$  = Average temperature difference [°F] during cooling season between outdoor air temperature and assumed 75°F indoor air temperature

| Climate Zone<br>(City based upon) | $OA_{AVG,cooling}$<br>[°F] <sup>190</sup> | $\Delta T_{AVG,cooling}$<br>[°F] |
|-----------------------------------|---|----------------------------------|
| North East (Fort Madison, IA)     | 76.2                                      | 1.2                              |
| North West (Lincoln, NE)          | 78.8                                      | 3.8                              |
| South East (Cape Girardeau, MO)   | 79.4                                      | 4.4                              |
| South West (Kaiser, MO)           | 81.3                                      | 6.3                              |
| St Louis, MO                      | 80.8                                      | 5.8                              |
| Kansas City, MO                   | 79.0                                      | 4.0                              |
| Average/Unknown (Knob Noster)     | 80.7                                      | 5.7                              |

- 1,000 = Conversion from Btu to kBtu
- $\eta_{cooling}$  = Seasonal energy efficiency ratio (SEER) of cooling system (kBtu/kWh)
  - = Actual

If the building is heated with electric heat (resistance or heat pump), the electric energy saved in annual heating due to the added insulation is:

$$\Delta kWh_{heating} = \frac{\left(\frac{1}{R_{existing}} - \frac{1}{R_{new}}\right) * Area * CRF * EFLH_{heating} * \Delta T_{AVG,heating}}{(3,412 * \eta_{heating})}$$

<sup>189</sup> Consistent with the information listed in ASHRAE, 2001, Table 5-1 Wall Sections with Steel Studs Parallel Path Correction Factors and experimental findings by the Oak Ridge National Laboratory, “Couple Secrets about How Framing is Effecting the Thermal Performance of Wood and Steel-Framed Walls.”

<sup>190</sup> National Solar Radiation Data Base -- 1991- 2005 Update: Typical Meteorological Year 3 [http://rredc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/by\\_state\\_and\\_city.html](http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/by_state_and_city.html) . Heating Season defined as September 17<sup>th</sup> through April 13<sup>th</sup>, cooling season defined as May 20 through August 15<sup>th</sup>. For cooling season, temperatures from 8AM to 8PM were used to establish average temperatures as this is when cooling systems are expected to be loaded.

Where:

$EFLH_{heating}$  = Equivalent Full Load Hours for Heating [hr] are provided in Section 2.4, HVAC end use

$\Delta T_{AVG,heating}$  = Average temperature difference [ $^{\circ}F$ ] during heating season between outdoor air temperature and assumed 55 $^{\circ}F$  heating base temperature

| Climate Zone<br>(City based upon) | $OA_{AVG,heating}$<br>[ $^{\circ}F$ ] <sup>191</sup> | $\Delta T_{AVG,heating}$<br>[ $^{\circ}F$ ] |
|-----------------------------------|--|---|
| North East (Fort Madison, IA)     | 42.1   | 12.9  |
| North West (Lincoln, NE)          | 39.0   | 16.0  |
| South East (Cape Girardeau, MO)   | 45.7   | 9.3   |
| South West (Kaiser, MO)           | 45.0   | 10.0  |
| St Louis, MO                      | 43.2   | 11.8  |
| Kansas City, MO                   | 40.3   | 14.7  |
| Average/Unknown (Knob Noster)     | 43.4   | 11.6  |

3,412 = Conversion from Btu to kWh.

$\eta_{heating}$  = Efficiency of heating system  
= Actual. *Note: electric resistance heating and heat pumps will have an efficiency greater than or equal to 100%*

If the building is heated with a gas furnace, there will be some electric savings in heating the building attributed to extra insulation since the furnace fans will run less.

$$\Delta kWh_{heating} = \Delta Therms * Fe * 29.3$$

Where:

$\Delta Therms$  = Gas savings calculated with equation below.

$Fe$  = Percentage of heating energy consumed by fans, assume 3.14%<sup>192</sup>

29.3 = Conversion from therms to kWh

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{cooling} * CF$$

Where:

$\Delta kWh_{cooling}$  = Annual electricity savings for cooling, as calculated above

$CF$  = Summer peak coincidence demand (kW) to annual energy (kWh) factor for Cooling

<sup>191</sup> National Solar Radiation Data Base -- 1991- 2005 Update: Typical Meteorological Year 3 [http://rredc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/by\\_state\\_and\\_city.html](http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/by_state_and_city.html) . Heating Season defined as September 17<sup>th</sup> through April 13<sup>th</sup>, cooling season defined as May 20 through August 15<sup>th</sup>. For cooling season, temperatures from 8AM to 8PM were used to establish average temperatures as this is when cooling systems are expected to be loaded.

<sup>192</sup>  $F_e$  is not one of the AHRI certified ratings provided for furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy ( $E_f$  in MMBtu/yr) and  $E_{ae}$  (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14% for residential units. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2%  $F_e$ . See “Programmable Thermostats Furnace Fan Analysis.xlsx” for reference. Assumed to be consistent with C&I applications.

$$= 0.0004439830$$

**NATURAL GAS SAVINGS**

If building uses a gas heating system, the savings resulting from the insulation is calculated with the following formula.

$$\Delta\text{Therms} = \frac{\left(\frac{1}{R_{\text{existing}}} - \frac{1}{R_{\text{new}}}\right) * \text{Area} * \text{CRF} * \text{EFLH}_{\text{heating}} * \Delta T_{\text{AVG,heating}}}{(100,000 * \eta_{\text{heat}})}$$

Where:

- $R_{\text{existing}}$  = Assembly heat loss coefficient with existing insulation [(hr-°F-ft²)/Btu]
- $R_{\text{new}}$  = Assembly heat loss coefficient with new insulation [(hr-°F-ft²)/Btu]
- Area = Area of the surface in square feet. Assume 1000 sq ft for planning.
- $\text{EFLH}_{\text{heating}}$  = Equivalent Full Load Hours for Heating are provided in Section 2.4, HVAC end use
- $\Delta T_{\text{AVG,heating}}$  = Average temperature difference [°F] during heating season (see above)
- 100,000 = Conversion from BTUs to Therms
- $\eta_{\text{heat}}$  = Efficiency of heating system  
= Actual

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

# **Natural Gas Technical Resource Manual**

## **Volume 3: Residential Gas Measures**





**Volume 3: Residential Measures ..... 4**

**3.1 Appliances End Use ..... 4**

    3.1.1 Clothes Dryer ..... 4

    3.1.2 Clothes Washer ..... 8

**3.2 Hot Water End Use ..... 16**

    3.2.1 Low Flow Faucet Aerator ..... 16

    3.2.2 Low Flow Showerhead ..... 22

    3.2.3 Water Heater ..... 27

    3.2.4 Water Heater Wrap ..... 31

    3.2.5 Hot Water Pipe Insulation ..... 34

    3.2.6 Thermostatic Restrictor Shower Valve ..... 37

    3.2.7 Hot Water Measure Kit ..... 44

**3.3 HVAC End Use ..... 45**

    3.3.1 Advanced Thermostat ..... 45

    3.3.2 Boiler ..... 52

    3.3.3 Duct Sealing and Duct Repair ..... 55

    3.3.4 Furnace ..... 63

    3.3.5 Standard Programmable Thermostat ..... 66

    3.3.6 Blower Motor ..... 71

    3.3.7 Furnace Tune-Up ..... 74

**3.4 Shell End Use ..... 77**

    3.4.1 Air Sealing ..... 77

    3.4.2 Ceiling Insulation ..... 85

    3.4.3 Duct Insulation ..... 90

    3.4.4 Floor Insulation ..... 95

    3.4.5 Foundation Sidewall Insulation ..... 100

    3.4.6 Storm Windows ..... 108

    3.4.7 Kneewall and Sillbox Insulation ..... 116

    3.4.8 Door ..... 121

    3.4.9 Wall Insulation ..... 122

## Volume 3: Residential Measures

### 3.1 Appliances End Use

#### 3.1.1 Clothes Dryer

##### DESCRIPTION

This measure relates to the installation of a residential clothes dryer meeting the ENERGY STAR® criteria. ENERGY STAR® qualified clothes dryers save energy through a combination of more efficient drying and reduced runtime of the drying cycle. More efficient drying is achieved through increased insulation, modifying operating conditions such as air flow and/or heat input rate, improving air circulation through better drum design or booster fans, and improving efficiency of motors. Reducing the runtime of dryers through automatic termination by temperature and moisture sensors is believed to have the greatest potential for reducing energy use in clothes dryers<sup>1</sup>. ENERGY STAR® provides criteria for both gas and electric clothes dryers.

This measure was developed to be applicable to the following program types: TOS, NC. If applied to other program types, the measure savings should be verified.

##### DEFINITION OF EFFICIENT EQUIPMENT

Clothes dryer must meet the ENERGY STAR® criteria, as required by the program.

##### DEFINITION OF BASELINE EQUIPMENT

The baseline condition is a clothes dryer meeting the minimum federal requirements for units manufactured on or after January 1, 2015.

##### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 14 years.<sup>2</sup>

##### DEEMED MEASURE COST

| Dryer Size | Incremental Cost <sup>3</sup> |
|------------|-------------------------------|
| Standard   | \$75                          |
| Compact    | \$105                         |

##### LOADSHAPE

Loadshape - Miscellaneous RES

---

<sup>1</sup> ENERGY STAR® Market & Industry Scoping Report. Residential Clothes Dryers. Table 8. November 2011.

[http://www.energystar.gov/ia/products/downloads/ENERGY\\_STAR\\_Scoping\\_Report\\_Residential\\_Clothes\\_Dryers.pdf](http://www.energystar.gov/ia/products/downloads/ENERGY_STAR_Scoping_Report_Residential_Clothes_Dryers.pdf)

<sup>2</sup> Based on an average estimated range of 12-16 years. ENERGY STAR® Market & Industry Scoping Report. Residential Clothes Dryers. November 2011.

[http://www.energystar.gov/ia/products/downloads/ENERGY\\_STAR\\_Scoping\\_Report\\_Residential\\_Clothes\\_Dryers.pdf](http://www.energystar.gov/ia/products/downloads/ENERGY_STAR_Scoping_Report_Residential_Clothes_Dryers.pdf)

<sup>3</sup> Cost based on ENERGY STAR® Savings Calculator for ENERGY STAR® Qualified Appliances.

[https://www.energystar.gov/sites/default/files/asset/document/appliance\\_calculator.xlsx](https://www.energystar.gov/sites/default/files/asset/document/appliance_calculator.xlsx)

**Algorithm**

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh = \left( \frac{Load}{CEF_{base}} - \frac{Load}{CEF_{eff}} \right) * N_{cycles} * \%Electric$$

Where:

Load = The average total weight (lbs) of clothes per drying cycle. If dryer size is unknown, assume standard.

| Drver Size | Load (lbs) <sup>4</sup> |
|------------|-------------------------|
| Standard   | 8.45                    |
| Compact    | 3                       |

CEFB<sub>base</sub> = Combined energy factor (CEF) (lbs/kWh) of the baseline unit is based on existing federal standards energy factor and adjusted to CEF as performed in the ENERGY STAR® analysis<sup>5</sup>. If product class unknown, assume electric, standard.

| Product Class                                      | CEFB <sub>base</sub> |
|--|----------------------|
| Vented Electric, Standard (≥ 4.4 ft <sup>3</sup> ) | 3.11                 |
| Vented Electric, Compact (120V) (< 4.4             | 3.01                 |
| Vented Electric, Compact (240V) (<4.4              | 2.73                 |
| Ventless Electric, Compact (240V) (<4.4            | 2.13                 |
| Vented Gas   | 2.84 <sup>6</sup>    |

CEFE<sub>ff</sub> = CEF (lbs/kWh) of the ENERGY STAR® unit based on ENERGY STAR® requirements.<sup>7</sup> If product class unknown, assume electric, standard.

| Product Class  | CEFE <sub>ff</sub> |
|--|--------------------|
| Vented or Ventless Electric, Standard (≥ 4.4 ft <sup>3</sup> ) | 3.93               |
| Vented or Ventless Electric, Compact (120V) (< 4.4             | 3.80               |
| Vented Electric, Compact (240V) (< 4.4 ft <sup>3</sup> )       | 3.45               |
| Ventless Electric, Compact (240V) (< 4.4 ft <sup>3</sup> )     | 2.68               |
| Vented Gas   | 3.48 <sup>8</sup>  |

N<sub>cycles</sub> = Number of dryer cycles per year. Use actual data if available. If unknown, use 283 cycles per year.<sup>9</sup>

<sup>4</sup> Based on ENERGY STAR® test procedures. [https://www.energystar.gov/index.cfm?c=clothesdry.pr\\_crit\\_clothes\\_dryers](https://www.energystar.gov/index.cfm?c=clothesdry.pr_crit_clothes_dryers)

<sup>5</sup> ENERGY STAR® Draft 2 Version 1.0 Clothes Dryers Data and Analysis

<sup>6</sup> Federal standards report CEF for gas clothes dryers in terms of lbs/kWh. To determine gas savings, this number is later converted to therms.

<sup>7</sup> ENERGY STAR® Clothes Dryers Key Product Criteria.

[https://www.energystar.gov/index.cfm?c=clothesdry.pr\\_crit\\_clothes\\_dryers](https://www.energystar.gov/index.cfm?c=clothesdry.pr_crit_clothes_dryers)

<sup>8</sup> Federal standards report CEF for gas clothes dryers in terms of lbs/kWh. To determine gas savings, this number is later converted to therms.

<sup>9</sup> Appendix D to Subpart B of Part 430 – Uniform Test Method for Measuring the Energy Consumption of Dryers.

%Electric = The percent of overall savings coming from electricity  
 = 100% for electric dryers, 5% for gas dryers<sup>10</sup>

Using defaults provided above:

| Product Class   | kWh   |
|---|-------|
| Vented Electric, Standard ( $\geq 4.4$ ft <sup>3</sup> )  | 145.7 |
| Vented Electric, Compact (120V) (< 4.4 ft <sup>3</sup> )  | 53.8  |
| Vented Electric, Compact (240V) (<4.4 ft <sup>3</sup> )   | 58.9  |
| Ventless Electric, Compact (240V) (<4.4 ft <sup>3</sup> ) | 74.3  |
| Vented Gas  | 7.0   |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

$\Delta kWh$  = Energy Savings as calculated above  
 CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0001148238

Using defaults provided above:

| Product Class   | kW     |
|---|--------|
| Vented Electric, Standard ( $\geq 4.4$ ft <sup>3</sup> )  | 0.0251 |
| Vented Electric, Compact (120V) (< 4.4 ft <sup>3</sup> )  | 0.0092 |
| Vented Electric, Compact (240V) (<4.4 ft <sup>3</sup> )   | 0.0101 |
| Ventless Electric, Compact (240V) (<4.4 ft <sup>3</sup> ) | 0.0128 |
| Vented Gas  | 0.0012 |

**NATURAL GAS ENERGY SAVINGS**

Natural gas savings only apply to ENERGY STAR® vented gas clothes dryers.

$$\Delta Therm = \left( \frac{Load}{CEF_{base}} - \frac{Load}{CEF_{eff}} \right) * Ncycles * Therm\_convert * \%Gas$$

Where:

Therm\_convert = Conversion factor from kWh to Therm  
 = 0.03413  
 %Gas = Percent of overall savings coming from gas

---

<sup>10</sup> %Electric accounts for the fact that some of the savings on gas dryers comes from electricity (motors, controls, etc). 5% was determined using a ratio of the electric to total savings from gas dryers given by ENERGY STAR® Draft 2 Version 1.0 Clothes Dryers Data and Analysis. Value reported in 2015 EPA EnergySTAR appliance calculator.

= 0% for electric units and 84% for gas units<sup>11</sup>

Using defaults provided above:

$$\begin{aligned}\Delta\text{Therm} &= (8.45/2.84 - 8.45/3.48) * 257 * 0.03413 * 0.84 \\ &= 4.03 \text{ therms}\end{aligned}$$

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>11</sup> %Gas accounts for the fact that some of the savings on gas dryers comes from electricity (motors, controls, etc). 84% was determined using a ratio of the gas to total savings from gas dryers given by ENERGY STAR® Draft 2 Version 1.0 Clothes Dryers Data and Analysis.

### 3.1.2 Clothes Washer

#### DESCRIPTION

This measure relates to the installation of a clothes washer meeting the ENERGY STAR® (CEE Tier1), ENERGY STAR® Most Efficient (CEE Tier 2) or CEE Tier 3 minimum qualifications. Note if the Domestic Hot Water (DHW) and dryer fuels of the installations are unknown (for example through a retail program) savings are based on a weighted blend using RECS data (the resultant values (kWh, therms and gallons of water) are provided). The algorithms can also be used to calculate site specific savings where DHW and dryer fuels are known.

This measure was developed to be applicable to the following program types: TOS, NC.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

Clothes washer must meet the ENERGY STAR® (CEE Tier1), ENERGY STAR® Most Efficient (CEE Tier 2), or CEE Tier 3 minimum qualifications (provided in the table below), as required by the program.

#### DEFINITION OF BASELINE EQUIPMENT

The baseline condition is a standard-sized clothes washer meeting the minimum federal baseline as of March 2015<sup>12</sup>.

| Efficiency Level |   | Top loading<br>>2.5 Cu ft | Front Loading<br>>2.5 Cu ft |
|------------------|---|---------------------------|-----------------------------|
| Baseline         | Federal Standard                        | ≥1.29 IMEF,<br>≤8.4 IWF   | ≥1.84 IMEF,<br>≤4.7 IWF     |
| Efficient        | ENERGY STAR®,<br>CEE Tier 1             | ≥2.06 IMEF,<br>≤4.3 IWF   | ≥2.38 IMEF,<br>≤3.7 IWF     |
|                  | ENERGY STAR® Most Efficient, CEE Tier 2 | ≥2.76 IMEF,<br>≤3.5 IWF   | ≥2.74 IMEF,<br>≤3.2 IWF     |
|                  | CEE Tier 3                              | ≥2.92 IMEF,<br>≤3.2 IWF   |                             |

The Integrated Modified Energy Factor (IMEF) includes unit operation, standby, water heating, and drying energy use, with the higher the value the more efficient the unit; "The quotient of the cubic foot (or liter) capacity of the clothes container divided by the total clothes washer energy consumption per cycle, with such energy consumption expressed as the sum of the machine electrical energy consumption, the hot water energy consumption, the energy required for removal of the remaining moisture in the wash load, and the combined low-power mode energy consumption."

The Integrated Water Factor (IWF) indicates the total water consumption of the unit, with the lower the value the less water required; "The quotient of the total weighted per-cycle water consumption for all 67 wash cycles in gallons divided by the cubic foot (or liter) capacity of the clothes washer"<sup>13</sup>.

<sup>12</sup> See [http://www1.eere.energy.gov/buildings/appliance\\_standards/product.aspx/productid/39](http://www1.eere.energy.gov/buildings/appliance_standards/product.aspx/productid/39).

<sup>13</sup> Definitions provided in ENERGY STAR® v7.1 specification on the ENERGY STAR® website.

**DEEMED LIFETIME OF EFFICIENT EQUIPMENT**

The expected measure life is assumed to be 14 years.<sup>14</sup>

**DEEMED MEASURE COST**

The incremental cost assumptions are provided below<sup>15</sup>:

| Efficiency Level                        | Incremental Cost |
|---|------------------|
| ENERGY STAR®, CEE Tier 1                | \$32             |
| ENERGY STAR® Most Efficient, CEE TIER 2 | \$393            |
| CEE TIER 3                              | \$454            |

**LOADSHAPE**

Miscellaneous RES

---

**Algorithm**

---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh = \left[ \left( Capacity * \frac{1}{IMEF_{base}} * Ncycles \right) * \left( \%CW_{base} + (\%DHW_{base} * \%Electric_{DHW}) + (\%Dryer_{base} * \%Electric_{Dryer}) \right) \right] - \left[ \left( Capacity * \frac{1}{IMEF_{eff}} * Ncycles \right) * \left( \%CW_{eff} + (\%DHW_{eff} * \%Electric_{DHW}) + (\%Dryer_{eff} * \%Electric_{Dryer}) \right) \right]$$

Where:

- Capacity = Clothes Washer capacity (cubic feet)  
= Actual - If capacity is unknown, assume 3.45 cubic feet<sup>16</sup>
- IMEFbase = Integrated Modified Energy Factor of baseline unit

| Efficiency Level | IMEFbase               |                          |                                |
|------------------|------------------------|--------------------------|--------------------------------|
|                  | Top loading >2.5 Cu ft | Front Loading >2.5 Cu ft | Weighted Average <sup>17</sup> |
| Federal Standard | 1.29                   | 1.84                     | 1.66                           |

<sup>14</sup> Based on DOE Chapter 8 Life-Cycle Cost and Payback Period Analysis.

<sup>15</sup> Based on weighted average of top loading and front loading units (based on available product from the California Energy Commission (CEC) Appliance database; <https://cacertappliances.energy.ca.gov/Pages/ApplianceSearch.aspx>) and cost data from Life-Cycle Cost and Payback Period Excel-based analytical tool. See ‘2015 Clothes Washer Analysis.xls’ for details.

<sup>16</sup> Based on the average clothes washer volume of all units that pass the new Federal Standard on the CEC database of Clothes Washer products (accessed on 08/28/2014). If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area, then they should be used.

<sup>17</sup> Weighted average IMEF of Federal Standard rating for Front Loading and Top Loading units. Weighting is based upon the relative top v front loading percentage of available non-ENERGY STAR® product in the CEC database (accessed 08/28/2014). The relative weightings are as follows, see more information in “2015 Clothes Washer Analysis.xlsx”:

IMEF<sub>eff</sub> = Integrated Modified Energy Factor of efficient unit  
 = Actual. If unknown, assume average values provided below.

| Efficiency Level                        | IMEF <sub>eff</sub>       |                             |                                |
|---|---------------------------|-----------------------------|--------------------------------|
|   | Top loading<br>>2.5 Cu ft | Front Loading<br>>2.5 Cu ft | Weighted Average <sup>18</sup> |
| ENERGY STAR®, CEE Tier 1                | 2.06                      | 2.38                        | 2.26                           |
| ENERGY STAR® Most Efficient, CEE Tier 2 | 2.76                      | 2.74                        | 2.74                           |
| CEE Tier 3                              | 2.92                      |                             | 2.92                           |

Ncycles = Number of Cycles per year  
 = 271<sup>19</sup>

%CW = Percentage of total energy consumption for Clothes Washer operation (different for baseline and efficient unit – see table below)

%DHW = Percentage of total energy consumption used for water heating (different for baseline and efficient unit – see table below)

%Dryer = Percentage of total energy consumption for dryer operation (different for baseline and efficient unit – see table below)

|   | Percentage of Total Energy Consumption <sup>20</sup> |      |        |
|---|--|------|--------|
|   | %CW  | %DHW | %Dryer |
| Federal Standard                        | 8%   | 31%  | 61%    |
| ENERGY STAR®, CEE Tier 1                | 8%   | 23%  | 69%    |
| ENERGY STAR® Most Efficient, CEE Tier 2 | 14%  | 10%  | 76%    |
| CEE Tier 3                              | 14%  | 10%  | 76%    |

| Efficiency Level                        | Front | Top |
|---|-------|-----|
| Baseline                                | 67%   | 33% |
| ENERGY STAR®, CEE Tier 1                | 62%   | 38% |
| ENERGY STAR® Most Efficient, CEE Tier 2 | 98%   | 2%  |
| CEE Tier 3                              | 100%  | 0%  |

<sup>18</sup> Weighting is based upon the relative top v front loading percentage of available product in the CEC database (accessed 08/28/2014).

<sup>19</sup> Weighted average of 271 clothes washer cycles per year (based on 2009 Residential Energy Consumption Survey (RECS) national sample survey of housing appliances section, Midwest Census Region for state of MO): <http://www.eia.gov/consumption/residential/data/2009/>. See ‘2015 Clothes Washer Analysis.xls’ for details.

If utilities have specific evaluation results providing a more appropriate assumption for single-family or multi-family homes, in a particular market, or geographical area then that should be used.

<sup>20</sup> The percentage of total energy consumption that is used for the machine, heating the hot water, or by the dryer is different depending on the efficiency of the unit. Values are based on a weighted average of top loading and front loading units based on data from DOE Life-Cycle Cost and Payback Analysis. See ‘2015 Clothes Washer Analysis.xls’ for details.



$\%Electric_{DHW}$  = Percentage of DHW savings assumed to be electric

| DHW fuel    | $\%Electric_{DHW}$ |
|-------------|--------------------|
| Electric    | 100%               |
| Natural Gas | 0%                 |
| Unknown     | 43% <sup>21</sup>  |

$\%Electric_{Dryer}$  = Percentage of dryer savings assumed to be electric

| Dryer fuel  | $\%Electric_{Dryer}$ |
|-------------|----------------------|
| Electric    | 100%                 |
| Natural Gas | 0%                   |
| Unknown     | 90% <sup>22</sup>    |

Using the default assumptions provided above, the prescriptive savings for each configuration are presented below<sup>23</sup>:

Front Loaders:

|  | $\Delta kWh$                   |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 149.3                          | 52.6                      | 96.4                      | -0.2                 |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 222.1                          | 85.9                      | 132.2                     | -4.0                 |
| CEE Tier 3                                 | 243.1                          | 104.8                     | 137.2                     | -1.1                 |

Top Loaders:

|  | $\Delta kWh$                   |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 149.3                          | 97.0                      | 77.0                      | 24.8                 |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 222.1                          | 132.6                     | 117.1                     | 27.5                 |
| CEE Tier 3                                 | 243.1                          | 374.4                     | 230.5                     | 42.0                 |

Weighted Average:

<sup>21</sup> Default assumption for unknown fuel is based on EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of MO. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area, then they should be used

<sup>22</sup> Default assumption for unknown is based on percentage of homes with clothes washers that use an electric dryer from EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of MO. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area, then they should be used.

<sup>23</sup> Note that the baseline savings for all cases (Front, Top and Weighted Average) is based on the weighted average baseline IMEF (as opposed to assuming Front baseline for Front efficient unit and Top baseline for Top efficient unit). The reasoning is that the support of the program of more efficient units (which are predominately front loading) will result in some participants switching from planned purchase of a top loader to a front loader.

|  | $\Delta kWH$                   |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 149.3                          | 70.6                      | 88.0                      | 9.4                  |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 222.1                          | 80.9                      | 137.5                     | -3.7                 |
| CEE Tier 3                                 | 243.1                          | 98.4                      | 143.2                     | -1.5                 |

If the DHW and dryer fuel is unknown the prescriptive kWh savings based on defaults provided above should be:

| Efficiency Level                           | $\Delta kWH$  |             |                     |
|--|---------------|-------------|---------------------|
|  | Front Loaders | Top Loaders | Weighted<br>Average |
| ENERGY STAR®, CEE Tier 1                   | 112.8         | 89.6        | 99.0                |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 161.5         | 136.6       | 134.3               |
| CEE Tier 3                                 | 424.6         | 154.8       | 151.8               |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

- $\Delta kWh$  = Energy Savings as calculated above
- CF = Summer Peak Coincidence Factor for measure  
= 0.0001148238

Using the default assumptions provided above, the prescriptive savings for each configuration are presented below:

Front Loaders:

|  | $\Delta kW$                    |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 0.022                          | 0.008                     | 0.015                     | 0.000                |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 0.033                          | 0.013                     | 0.020                     | -0.001               |
| CEE Tier 3                                 | 0.037                          | 0.016                     | 0.021                     | 0.000                |

Top Loaders:

|  | $\Delta kW$                    |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 0.022                          | 0.015                     | 0.012                     | 0.004                |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 0.033                          | 0.020                     | 0.018                     | 0.004                |
| CEE Tier 3                                 | 0.037                          | 0.056                     | 0.035                     | 0.006                |

Weighted Average:

|  | $\Delta kW$                    |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 0.022                          | 0.011                     | 0.013                     | 0.001                |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 0.033                          | 0.012                     | 0.021                     | -0.001               |
| CEE Tier 3                                 | 0.037                          | 0.015                     | 0.022                     | 0.000                |

If the DHW and dryer fuel is unknown, the prescriptive kW savings should be:

| Efficiency Level                           | $\Delta kW$   |             |                     |
|--|---------------|-------------|---------------------|
|  | Front Loaders | Top Loaders | Weighted<br>Average |
| ENERGY STAR®, CEE Tier 1                   | 0.013         | 0.017       | 0.015               |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 0.021         | 0.024       | 0.020               |
| CEE Tier 3                                 | 0.023         | 0.064       | 0.023               |

**NATURAL GAS SAVINGS**

$$\Delta Therms = \left[ \left[ \left( Capacity * \frac{1}{IMEF_{base}} * N_{cycles} \right) * \left( (\%DHW_{base} * \%Natural\ Gas_{DHW} * R_{eff}) + (\%Dryer_{base} * \%Gas_{Dryer} \%Gas_{Dryer}) \right) \right] - \left[ \left( Capacity * \frac{1}{IMEF_{eff}} * N_{cycles} \right) * \left( (\%DHW_{eff} * \%Gas_{DHW} \%Natural\ Gas_{DHW} * R_{eff}) + (\%Dryer_{eff} * \%Gas_{Dryer} \%Gas_{Dryer}) \right) \right] \right] * Therm_{convert}$$

Where:

$\%Gas_{DHW}$  = Percentage of DHW savings assumed to be Natural Gas

| DHW fuel    | $\%Gas_{DHW}$     |
|-------------|-------------------|
| Electric    | 0%                |
| Natural Gas | 100%              |
| Unknown     | 57% <sup>24</sup> |

$R_{eff}$  = Recovery efficiency factor  
 = 1.26<sup>25</sup>

<sup>24</sup> Default assumption for unknown fuel is based EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of MO. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area then that should be used.

<sup>25</sup> To account for the different efficiency of electric and Natural Gas hot water heaters (gas water heater: recovery efficiencies ranging from 0.74 to 0.85 (0.78 used), and electric water heater with 0.98 recovery efficiency ([http://www.energystar.gov/ia/partners/bldrs\\_lenders\\_raters/downloads/Waste\\_Water\\_Heat\\_Recovery\\_Guidelines.pdf](http://www.energystar.gov/ia/partners/bldrs_lenders_raters/downloads/Waste_Water_Heat_Recovery_Guidelines.pdf))). Therefore a factor of 0.98/0.78 (1.26) is applied.

$\%Gas_{Dryer}$  = Percentage of dryer savings assumed to be Natural Gas

| Dryer fuel  | $\%Gas_{Dryer}$   |
|-------------|-------------------|
| Electric    | 0%                |
| Natural Gas | 100%              |
| Unknown     | 10% <sup>26</sup> |

Therm\_convert = Conversion factor from kWh to Therm  
 = 0.03412

Other factors as defined above.

Using the default assumptions provided above, the prescriptive savings for each configuration are presented below:

Front Loaders:

|  | $\Delta$ Therms                |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 0.0                            | 2.2                       | 2.5                       | 4.7                  |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 0.0                            | 3.8                       | 3.6                       | 7.4                  |
| CEE Tier 3                                 | 0.0                            | 8.1                       | 11.3                      | 19.4                 |

Top Loaders:

|  | $\Delta$ Therms                |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 0.0                            | 4.2                       | 1.8                       | 6.0                  |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 0.0                            | 5.9                       | 3.1                       | 8.9                  |
| CEE Tier 3                                 | 0.0                            | 5.9                       | 3.6                       | 9.6                  |

Weighted Average:

|  | $\Delta$ Therms                |                           |                           |                      |
|--|--------------------------------|---------------------------|---------------------------|----------------------|
|  | Electric DHW<br>Electric Dryer | Gas DHW<br>Electric Dryer | Electric DHW<br>Gas Dryer | Gas DHW<br>Gas Dryer |
| ENERGY STAR®, CEE Tier 1                   | 0.0                            | 3.4                       | 2.1                       | 5.5                  |
| ENERGY STAR® Most Efficient,<br>CEE Tier 2 | 0.0                            | 6.1                       | 2.9                       | 9.0                  |
| CEE Tier 3                                 | 0.0                            | 6.2                       | 3.4                       | 9.6                  |

If the DHW and dryer fuel is unknown, the prescriptive Therm savings should be:

<sup>26</sup> Default assumption for unknown fuel is based EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of MO. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area then that should be used.

| Efficiency Level                        | ΔTherms       |             |                  |
|---|---------------|-------------|------------------|
|   | Front Loaders | Top Loaders | Weighted Average |
| ENERGY STAR®, CEE Tier 1                | 1.51          | 2.52        | 2.11             |
| ENERGY STAR® Most Efficient, CEE Tier 2 | 2.52          | 3.60        | 3.71             |
| CEE Tier 3                              | 5.66          | 3.70        | 3.84             |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

$$\Delta Water \text{ (gallons)} = Capacity * (IWF_{base} - IWF_{eff}) * N_{cycles}$$

Where:

IWF<sub>base</sub> = Integrated Water Factor of baseline clothes washer  
 = 5.92<sup>27</sup>

IWF<sub>eff</sub> = Water Factor of efficient clothes washer  
 = Actual - If unknown assume average values provided below

Using the default assumptions provided above, the prescriptive water savings for each efficiency level are presented below:

| Efficiency Level                        | IWF <sup>28</sup> |             |                  | ΔWater (gallons per year) |             |                  |
|---|-------------------|-------------|------------------|---------------------------|-------------|------------------|
|   | Front Loaders     | Top Loaders | Weighted Average | Front Loaders             | Top Loaders | Weighted Average |
| Federal Standard                        | 4.7               | 8.4         | 5.92             | N/A                       |             |                  |
| ENERGY STAR®, CEE Tier 1                | 3.7               | 4.3         | 3.93             | 934                       | 3,828       | 1,857            |
| ENERGY STAR® Most Efficient, CEE Tier 2 | 3.2               | 3.5         | 3.21             | 1,400                     | 4,575       | 2,532            |
| CEE Tier 3                              | 3.2               |             | 3.20             | 1,400                     | 7,842       | 2,538            |

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

<sup>27</sup> Weighted average IWF of Federal Standard rating for Front Loading and Top Loading units. Weighting is based upon the relative top v front loading percentage of available non-ENERGY STAR® product in the CEC database.

<sup>28</sup> IWF values are the weighted average of the new ENERGY STAR® specifications. Weighting is based upon the relative top v front loading percentage of available ENERGY STAR® and ENERGY STAR® Most Efficient product in the CEC database. See “2015 Clothes Washer Analysis.xls” for the calculation.

## 3.2 Hot Water End Use

### 3.2.1 Low Flow Faucet Aerator

This measure relates to the installation of a low flow faucet aerator in a household kitchen or bath faucet fixture.

This measure may be used for units provided through Efficiency Kit's however the in service rate for such measures should be derived through evaluation results specifically for this implementation methodology.

This measure was developed to be applicable to the following program types: TOS, NC, RF, DI, KITS.

If applied to other program types, the measure savings should be verified.

#### **DEFINITION OF EFFICIENT EQUIPMENT**

To qualify for this measure the installed equipment must be a low flow faucet aerator, for bathrooms rated at 1.5 gallons per minute (GPM) or less, or for kitchens rated at 2.2 GPM or less. Savings are calculated on an average savings per faucet fixture basis.

#### **DEFINITION OF BASELINE EQUIPMENT**

The baseline condition is assumed to be a standard bathroom faucet aerator rated at 2.25 GPM or greater, or a standard kitchen faucet aerator rated at 2.75 GPM or greater. Average measured flow rates are used in the algorithm and are lower, reflecting the penetration of previously installed low flow fixtures (and therefore the freerider rate for this measure should be 0), use of the faucet at less than full flow, debris buildup, and lower water system pressure than fixtures are rated at.

#### **DEEMED LIFETIME OF EFFICIENT EQUIPMENT**

The expected measure life is assumed to be 10 years.<sup>29</sup>

#### **DEEMED MEASURE COST**

The incremental cost for this measure is \$11.33<sup>30</sup> or program actual.

For faucet aerators provided in Efficiency Kits, the actual program delivery costs should be utilized.

#### **LOADSHAPE**

Water Heating RES

---

---

### **Algorithm**

---

---

#### **CALCULATION OF SAVINGS**

#### **ELECTRIC ENERGY SAVINGS**

Note these savings are *per* faucet retrofitted<sup>31</sup> (unless faucet type is unknown, then it is per household).

---

<sup>29</sup> Measure lifetime is derived from the California DEER Effective Useful Life Table – 2014 Table Update, "[http://www.deeresources.com/files/DEER2013codeUpdate/download/DEER2014-EUL-table-update\\_2014-02-05.xlsx](http://www.deeresources.com/files/DEER2013codeUpdate/download/DEER2014-EUL-table-update_2014-02-05.xlsx)"

<sup>30</sup> Direct-install price per showerhead assumes cost of showerhead (Market research average of \$3 and assess and install cost of \$8.33 (20min at \$25 per hour, which is in line with the typical prevailing wage of a General Laborer, as per the Annual Wage Order No. 23 published by the Missouri Department of Labor).

<sup>31</sup> This algorithm calculates the amount of energy saved per aerator by determining the fraction of water consumption savings for the upgraded fixture.

$$\Delta kWh = \%ElectricDHW * ((GPM\_base * L\_base - GPM\_low * L\_low) * Household * 365.25 * DF / FPH) * EPG\_electric * ISR$$

Where:

**%ElectricDHW** = proportion of water heating supplied by electric resistance heating

| DHW fuel    | %ElectricDHW      |
|-------------|-------------------|
| Electric    | 100%              |
| Natural Gas | 0%                |
| Unknown     | 43% <sup>32</sup> |

**GPM\_base** = Average flow rate, in gallons per minute, of the baseline faucet “as-used.” This includes the effect of existing low flow fixtures and therefore the freerider rate for this measure should be 0.

= 1.39<sup>33</sup> or custom based on metering studies<sup>34</sup> or if measured during DI:  
 = Measured full throttle flow \* 0.83 throttling factor<sup>35</sup>

**GPM\_low** = Average flow rate, in gallons per minute, of the low-flow faucet aerator “as-used”

= 0.94<sup>36</sup> or custom based on metering studies<sup>37</sup> or if measured during DI:  
 = Rated full throttle flow \* 0.95 throttling factor<sup>38</sup>

**L\_base** = Average baseline daily length faucet use per capita for faucet of interest in minutes

= if available custom based on metering studies, if not use:

---

<sup>32</sup> Default assumption for unknown fuel is based on EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of MO. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area then that should be used

<sup>33</sup> Deoreo, B., and P. Mayer. Residential End Uses of Water Study Update. Forthcoming. ©2015 Water Research Foundation. Reprinted With Permission.

<sup>34</sup> Measurement should be based on actual average flow consumed over a period of time rather than a onetime spot measurement for maximum flow. Studies have shown maximum flow rates do not correspond well to average flow rate due to occupant behavior which does not always use maximum flow.

<sup>35</sup> 2008, Schuldt, Marc, and Debra Tachibana. Energy related Water Fixture Measurements: Securing the Baseline for Northwest Single Family Homes. 2008 ACEEE Summer Study on Energy Efficiency in Buildings. Page 1-265. [www.seattle.gov/light/Conserve/Reports/paper\\_10.pdf](http://www.seattle.gov/light/Conserve/Reports/paper_10.pdf)

<sup>36</sup> Average retrofit flow rate for kitchen and bathroom faucet aerators from sources 2, 4, 5, and 7(see source table at end of characterization). This accounts for all throttling and differences from rated flow rates. Assumes all kitchen aerators at 2.2 gpm or less and all bathroom aerators at 1.5 gpm or less. The most comprehensive available studies did not disaggregate kitchen use from bathroom use, but instead looked at total flow and length of use for all faucets. This makes it difficult to reliably separate kitchen water use from bathroom water use. It is possible that programs installing low flow aerators lower than the 2.2 gpm for kitchens and 1.5 gpm for bathrooms will see a lower overall average retrofit flow rate.

<sup>37</sup> Measurement should be based on actual average flow consumed over a period of time rather than a onetime spot measurement for maximum flow. Studies have shown maximum flow rates do not correspond well to average flow rate due to occupant behavior which does not always use maximum flow.

<sup>38</sup> 2008, Schuldt, Marc, and Debra Tachibana. Energy related Water Fixture Measurements: Securing the Baseline for Northwest Single Family Homes. 2008 ACEEE Summer Study on Energy Efficiency in Buildings. Page 1-265. [www.seattle.gov/light/Conserve/Reports/paper\\_10.pdf](http://www.seattle.gov/light/Conserve/Reports/paper_10.pdf)

| Faucet Type  | L_base<br>(min/person/day) |
|--|----------------------------|
| Kitchen  | 4.5 <sup>39</sup>          |
| Bathroom   | 1.6 <sup>40</sup>          |
| If location unknown (total for household): Single-Family | 7.8 <sup>41</sup>          |
| If location unknown (total for household): Multi-Family  | 6.7 <sup>42</sup>          |

L\_low = Average retrofit daily length faucet use per capita for faucet of interest in minutes

= if available custom based on metering studies, if not use:

| Faucet Type  | L_low<br>(min/person/day) |
|--|---------------------------|
| Kitchen  | 4.5 <sup>43</sup>         |
| Bathroom   | 1.6 <sup>44</sup>         |
| If location unknown (total for household): Single-Family | 7.8 <sup>45</sup>         |
| If location unknown (total for household): Multi-Family  | 6.7 <sup>46</sup>         |

Household = Average number of people per household

| Household Unit Type    | Household  |
|------------------------|--|
| Single-Family - Deemed | 2.67 <sup>47</sup>                                   |
| School Kits            | 4.3 <sup>48</sup>                                    |
| Multi-Family - Deemed  | 2.07 <sup>49</sup>                                   |
| Custom                 | Actual Occupancy or Number of Bedrooms <sup>50</sup> |

<sup>39</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group. This study of 135 single and multi-family homes in Michigan metered energy parameters for efficient showerhead and faucet aerators.

<sup>40</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group. This study of 135 single and multi-family homes in Michigan metered energy parameters for efficient showerhead and faucet aerators.

<sup>41</sup> One kitchen faucet plus 2.04 bathroom faucets. Based on findings from a 2012 Ameren Missouri potential study for single family homes.

<sup>42</sup> One kitchen faucet plus 1.4 bathroom faucets. Based on findings from an Ameren Missouri PY13 data for multifamily homes.

<sup>43</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group.

<sup>44</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group.

<sup>45</sup> One kitchen faucet plus 2.04 bathroom faucets. Based on findings from a 2012 Ameren Missouri potential study for single family homes.

<sup>46</sup> One kitchen faucet plus 1.4 bathroom faucets. Based on findings from an Ameren Missouri PY13 data for multifamily homes.

<sup>47</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Planning Year 2015, provided by Cadmus.

<sup>48</sup> Ameren Missouri Energy Efficient Kits Program Impact and Process Evaluation: Program Year 2016.

<sup>49</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Planning Year 2015, provided by Cadmus.

<sup>50</sup> Bedrooms are suitable proxies for household occupancy, and may be preferable to actual occupancy due to turnover rates in



365.25 = Days in a year, on average.

DF = Drain Factor

| Faucet Type | Drain Factor <sup>51</sup> |
|-------------|----------------------------|
| Kitchen     | 75%                        |
| Bath        | 90%                        |
| Unknown     | 79.5%                      |

FPH = Faucets Per Household

| Faucet Type  | FPH                |
|--|--------------------|
| Kitchen Faucets Per Home (KFPH)                          | 1                  |
| Bathroom Faucets Per Home (BFPH): Single-Family          | 2.04 <sup>52</sup> |
| Bathroom Faucets Per Home (BFPH): School Kits            | 2.4 <sup>53</sup>  |
| Bathroom Faucets Per Home (BFPH): Multi-Family           | 1.4 <sup>54</sup>  |
| If location unknown (total for household): Single-Family | 3.04               |
| If location unknown (total for household): Multi-Family  | 2.4                |

EPG<sub>electric</sub> = Energy per gallon of water used by faucet supplied by electric water heater

$$= (8.33 * 1.0 * (\text{WaterTemp} - \text{SupplyTemp})) / (\text{RE}_{\text{electric}} * 3412)$$

8.33 = Specific weight of water (lbs/gallon)

1.0 = Heat Capacity of water (btu/lb-°F)

WaterTemp = Assumed temperature of mixed water

residency and non-adult population impacts.

<sup>51</sup> Because faucet usages are at times dictated by volume (e.g., filling a cooking pot), only usage of the sort that would go straight down the drain will provide savings. VEIC is unaware of any metering study that has determined this specific factor and so recommends these values to be 75% for the kitchen and 90% for the bathroom. If the aerator location is unknown an average of 79.5% should be used which is based on the assumption that 70% of household water runs through the kitchen faucet and 30% through the bathroom  $(0.7*0.75)+(0.3*0.9)=0.795$ .

<sup>52</sup> Based on findings from a 2012 Ameren Missouri potential study for single family homes.

<sup>53</sup> Ameren Missouri Energy Efficient Kits Program Impact and Process Evaluation: Program Year 2016.

<sup>54</sup> Based on findings from an Ameren Missouri PY13 data for multifamily homes

- = 86F for Bath, 93F for Kitchen 91F for Unknown<sup>55</sup>
- SupplyTemp = Assumed temperature of water entering house  
= 60.83F<sup>56</sup>
- RE\_electric = Recovery efficiency of electric water heater  
= 98%<sup>57</sup>
- 3412 = Converts Btu to kWh (btu/kWh)
- ISR = In service rate of faucet aerators dependant on install method as listed in table below

| Selection                    | ISR                 |
|------------------------------|---------------------|
| Direct Install               | 0.977 <sup>58</sup> |
| Efficiency Kit—Single Family | 0.52 <sup>59</sup>  |
| Efficiency Kit—Multi Family  | 1.0 <sup>60</sup>   |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

- $\Delta kWh$  = as calculated above
- CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
= 0.0000887318<sup>61</sup>

**NATURAL GAS SAVINGS**

$$\Delta Therms = \%GasDHW * ((GPM\_base * L\_base - GPM\_low * L\_low) * Household * 365.25 * DF / FPH) * EPG\_gas * ISR$$

Where:

- $\%GasDHW$  = proportion of water heating supplied by Natural Gas heating

| DHW fuel    | $\%GasHW$         |
|-------------|-------------------|
| Electric    | 0%                |
| Natural Gas | 100%              |
| Unknown     | 48% <sup>62</sup> |

<sup>55</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group. If the aerator location is unknown an average of 91% should be used which is based on the assumption that 70% of household water runs through the kitchen faucet and 30% through the bathroom  $(0.7*93)+(0.3*86)=0.91$ .

<sup>56</sup> Based on the DOE's Building America Standard DHW Event Schedule calculator. Average annual water main temperatures were determined for each defined weather zone in Missouri. The overall average of 60.83 is taken to represent the statewide average input water temperature.

<sup>57</sup> Electric water heaters have recovery efficiency of 98%: <http://www.ahridirectory.org/ahridirectory/pages/home.aspx>

<sup>58</sup> Ameren Missouri Home Energy Analysis Program Impact and Process Evaluation: Program Year 2015

<sup>59</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Program Year 2015

<sup>60</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Program Year 2015

<sup>61</sup> Based on Ameren Missouri 2016 Loadshape for Residential Water Heating End-Use.

<sup>62</sup> Default assumption for unknown fuel is based on EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of MO. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area then that should be used

EPG\_gas = Energy per gallon of Hot water supplied by gas  
=  $(8.33 * 1.0 * (\text{WaterTemp} - \text{SupplyTemp})) / (\text{RE\_gas} * 100,000)$

RE\_gas = Recovery efficiency of gas water heater  
= 78% For SF homes<sup>63</sup>  
= 67% For MF homes<sup>64</sup>

100,000 = Converts Btus to Therms (btu/Therm)

Other variables as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

$\Delta\text{gallons} = ((\text{GPM\_base} * \text{L\_base} - \text{GPM\_low} * \text{L\_low}) * \text{Household} * 365.25 * \text{DF} / \text{FPH}) * \text{ISR}$

Variables as defined above.

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>63</sup> DOE Final Rule discusses Recovery Efficiency with an average around 0.76 for Gas Fired Storage Water heaters and 0.78 for standard efficiency gas fired tankless water heaters up to 0.95 for the highest efficiency gas fired condensing tankless water heaters. These numbers represent the range of new units however, not the range of existing units in stock. Review of AHRI Directory suggests range of recovery efficiency ratings for new Gas DHW units of 70-87%. Average of existing units is estimated at 78%.

<sup>64</sup> Water heating in multi-family buildings is often provided by a larger central boiler. This suggests that the average recovery efficiency is somewhere between a typical central boiler efficiency of 0.59 and the 0.75 for single family homes. An average efficiency of 0.67 is used for this analysis as a default for multi-family buildings.

### 3.2.2 Low Flow Showerhead

#### DESCRIPTION

This measure relates to the installation of a low flow showerhead in a single or multi-family household.

This measure may be used for units provided through Efficiency Kit's however the in service rate for such measures should be derived through evaluation results specifically for this implementation methodology.

This measure was developed to be applicable to the following program types: TOS, RF, NC, DI, KITS.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure the installed equipment must be a low flow showerhead, typically rated at 2.0 gallons per minute (GPM) or less. Savings are calculated on a per showerhead fixture basis.

#### DEFINITION OF BASELINE EQUIPMENT

For Direct-install programs, the baseline condition is assumed to be a standard showerhead rated at 2.5 GPM<sup>65</sup> or greater.

For retrofit and time-of-sale programs, the baseline condition is assumed to be a representative average of existing showerhead flow rates of participating customers including a range of low flow showerheads, standard-flow showerheads, and high-flow showerheads.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 10 years.<sup>66</sup>

#### DEEMED MEASURE COST

The incremental cost for time of sale, new construction or efficiency kits is \$7<sup>67</sup> or program actual.

For low flow showerheads provided in retrofit or direct install programs, the actual program delivery costs should be utilized, if unknown assume \$15.33.<sup>68</sup>

#### LOADSHAPE

Water Heating RES

---

---

#### Algorithm

---

---

#### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

Note these savings are per showerhead fixture

---

<sup>65</sup> Maximum showerhead flow rate at 80 PSI is 2.5 GPM in accordance with Federal Standard 10 CFR Part 430.32(p) See Docket filed at "<https://www.regulations.gov/document?D=EERE-2011-BT-TP-0061-0039>"

<sup>66</sup> Table C-6, Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007. Evaluations indicate that consumer dissatisfaction may lead to reductions in persistence, particularly in Multi-Family , "[http://neep.org/uploads/EMV%20Forum/EMV%20Studies/measure\\_life\\_GDS%5B1%5D.pdf](http://neep.org/uploads/EMV%20Forum/EMV%20Studies/measure_life_GDS%5B1%5D.pdf)"

<sup>67</sup> Based on online pricing market research 2/6/2017.

<sup>68</sup> Direct-install price per showerhead assumes cost of showerhead (Market research average of \$7 and assess and install cost of \$8.33 (20min at \$25 per hour, which is in line with the typical prevailing wage of a General Laborer, as per the Annual Wage Order No. 23 published by the Missouri Department of Labor).

$$\Delta kWh = \%ElectricDHW * ((GPM\_base * L\_base - GPM\_low * L\_low) * Household * SPCD * 365.25 / SPH) * EPG\_electric * ISR$$

Where:

**%ElectricDHW** = proportion of water heating supplied by electric resistance heating

| DHW fuel    | %ElectricDHW      |
|-------------|-------------------|
| Electric    | 100%              |
| Natural Gas | 0%                |
| Unknown     | 43% <sup>69</sup> |

**GPM\_base** = Flow rate of the baseline showerhead

| Program                              | GPM_base           |
|--------------------------------------|--------------------|
| Direct-install                       | 2.35 <sup>70</sup> |
| Retrofit, Efficiency Kits, NC or TOS | 2.35 <sup>71</sup> |

**GPM\_low** = As-used flow rate of the low-flow showerhead, which may, as a result of measurements of program evaluations deviate from rated flows, see table below:

| Rated Flow                     |
|--------------------------------|
| 2.0 GPM                        |
| 1.75 GPM                       |
| 1.5 GPM                        |
| Custom or Actual <sup>72</sup> |

**L\_base** = Shower length in minutes with baseline showerhead  
= 7.8 min<sup>73</sup>

**L\_low** = Shower length in minutes with low-flow showerhead

<sup>69</sup> Default assumption for unknown fuel is based on EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of MO. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area then that should be used

<sup>70</sup> Based on Ameren MO PY14 program data for direct-install measures. A delta of 0.85 GPM is assumed, derived from confirmed retrofitted aerator flow rates of 1.5 GPM and assuming existing showerheads were consuming 2.35 GPM, based on average of DOE-reported values for homes with domestic water pressures of 60psi and 80psi. <http://energy.gov/energysaver/articles/reduce-hot-water-use-energy-savings>.

<sup>71</sup> Representative value from sources 1, 2, 4, 5, 6 and 7 (See Source Table at end of measure section) adjusted slightly upward to account for program participation which is expected to target customers with existing higher flow devices rather than those with existing low flow devices.

<sup>72</sup> Note that actual values may be either a) program-specific minimum flow rate, or b) program-specific evaluation-based value of actual effective flow-rate due to increased duration or temperatures. The latter increases in likelihood as the rated flow drops and may become significant at or below rated flows of 1.5 GPM. The impact can be viewed as the inverse of the throttling described in the footnote for baseline flowrate.

<sup>73</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group. This study of 135 single and multi-family homes in Michigan metered energy parameters for efficient showerhead and faucet aerators.

= 7.8 min<sup>74</sup>

Household

= Average number of people per household

| Household Unit Type <sup>75</sup> | Household  |
|-----------------------------------|--|
| Single-Family - Deemed            | 2.67 <sup>76</sup>                                   |
| School Kits                       | 4.3  |
| Multi-Family - Deemed             | 2.07 <sup>77</sup>                                   |
| Custom                            | Actual Occupancy or Number of Bedrooms <sup>78</sup> |

SPCD

= Showers Per Capita Per Day

= 0.6<sup>79</sup>

365.25

= Days per year, on average.

SPH

= Showerheads Per Household so that per-showerhead savings fractions can be determined

| Household Type | SPH                |
|----------------|--------------------|
| Single-Family  | 2.05 <sup>80</sup> |
| School Kits    | 2.1 <sup>81</sup>  |
| Multi-Family   | 1.4 <sup>82</sup>  |
| Custom         | Actual             |

EPG<sub>electric</sub>

= Energy per gallon of hot water supplied by electric

=  $(8.33 * 1.0 * (\text{ShowerTemp} - \text{SupplyTemp})) / (\text{RE}_{\text{electric}} * 3412)$

=  $(8.33 * 1.0 * (101 - 60.83)) / (0.98 * 3412)$

= 0.100 kWh/gal

8.33

= Specific weight of water (lbs/gallon)

1.0

= Heat Capacity of water (btu/lb-°)

ShowerTemp

= Assumed temperature of water

<sup>74</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group. This study of 135 single and multi-family homes in Michigan metered energy parameters for efficient showerhead and faucet aerators.

<sup>75</sup> If household type is unknown, as may be the case for time of sale measures, then single family deemed value shall be used.

<sup>76</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Planning Year 2015, provided by Cadmus.

<sup>77</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Planning Year 2015, provided by Cadmus

<sup>78</sup> Bedrooms are suitable proxies for household occupancy, and may be preferable to actual occupancy due to turnover rates in residency and non-adult population impacts.

<sup>79</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group.

<sup>80</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Planning Year 2015, provided by Cadmus.

<sup>81</sup> Ameren Missouri Energy Efficient Kits Program Impact and Process Evaluation: Program Year 2016.

<sup>82</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Planning Year 2015, provided by Cadmus.

- = 101.0 F <sup>83</sup>
- SupplyTemp = Assumed temperature of water entering house  
= 60.83 F <sup>84</sup>
- RE\_electric = Recovery efficiency of electric water heater  
= 98% <sup>85</sup>
- 3412 = Converts Btu to kWh (btu/kWh)
- ISR = In service rate of showerhead  
= Dependant on program delivery method as listed in table below

| Selection                    | ISR                |
|------------------------------|--------------------|
| Direct Install               | 0.98 <sup>86</sup> |
| Efficiency Kit—Single Family | 0.47 <sup>87</sup> |
| Efficiency Kit—Multi Family  | 0.86 <sup>88</sup> |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

- $\Delta kWh$  = as calculated above
- CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
= 0.0000887318<sup>89</sup>

**NATURAL GAS SAVINGS**

$$\Delta \text{Therms} = \% \text{GasDHW} * ((\text{GPM}_{\text{base}} * L_{\text{base}} - \text{GPM}_{\text{low}} * L_{\text{low}}) * \text{Household} * \text{SPCD} * 365.25 / \text{SPH}) * \text{EPG}_{\text{gas}} * \text{ISR}$$

Where:

- %GasDHW = proportion of water heating supplied by Natural Gas heating

| DHW fuel    | %GasDHW           |
|-------------|-------------------|
| Electric    | 0%                |
| Natural Gas | 100%              |
| Unknown     | 48% <sup>90</sup> |

<sup>83</sup> Cadmus and Opinion Dynamics Showerhead and Faucet Aerator Meter Study Memorandum dated June 2013, directed to Michigan Evaluation Working Group.

<sup>84</sup> Based on the DOE’s Building America Standard DHW Event Schedule calculator. Average annual water main temperatures were determined for each defined weather zone in Missouri. The overall average of 60.83 is taken to represent the statewide average input water temperature.

<sup>85</sup> Electric water heaters have recovery efficiency of 98%: <http://www.ahridirectory.org/ahridirectory/pages/home.aspx>

<sup>86</sup> Ameren Missouri Home Energy Analysis Program Impact and Process Evaluation: Program Year 2015

<sup>87</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Program Year 2015

<sup>88</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Program Year 2015

<sup>89</sup> Based on Ameren Missouri 2016 Loadshape for Residential Water Heating End-Use.

<sup>90</sup> Default assumption for unknown fuel is based on EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of IL. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area then that should be used

EPG\_gas = Energy per gallon of Hot water supplied by gas  
=  $(8.33 * 1.0 * (\text{ShowerTemp} - \text{SupplyTemp})) / (\text{RE\_gas} * 100,000)$   
= 0.00429 Therm/gal for SF homes  
= 0.00499 Therm/gal for MF homes

RE\_gas = Recovery efficiency of gas water heater  
= 78% For SF homes<sup>91</sup>  
= 67% For MF homes<sup>92</sup>

100,000 = Converts Btus to Therms (btu/Therm)

Other variables as defined above.

#### WATER IMPACT DESCRIPTIONS AND CALCULATION

$\Delta\text{gallons} = ((\text{GPM\_base} * \text{L\_base} - \text{GPM\_low} * \text{L\_low}) * \text{Household} * \text{SPCD} * 365.25 / \text{SPH}) * \text{ISR}$

Variables as defined above

#### DEEMED O&M COST ADJUSTMENT CALCULATION

N/A

---

<sup>91</sup> DOE Final Rule discusses Recovery Efficiency with an average around 0.76 for Gas Fired Storage Water heaters and 0.78 for standard efficiency gas fired tankless water heaters up to 0.95 for the highest efficiency gas fired condensing tankless water heaters. These numbers represent the range of new units however, not the range of existing units in stock. Review of AHRI Directory suggests range of recovery efficiency ratings for new Gas DHW units of 70-87%. Average of existing units is estimated at 78%.

<sup>92</sup> Water heating in multi-family buildings is often provided by a larger central boiler. This suggests that the average recovery efficiency is somewhere between a typical central boiler efficiency of 0.59 and the 0.75 for single family homes. An average efficiency of 0.67 is used for this analysis as a default for multi-family buildings.



### 3.2.3 Water Heater

#### DESCRIPTION

This measure applies to gas water heaters under the following program types:

- a) Time of Sale or New Construction:  
The purchase and installation of a new, residential gas-fired storage or tankless water heater meeting program energy factor (EF) requirements, in place of a unit meeting federal standards.
- b) Early Replacement:  
The early removal of an existing and functioning, residential gas-fired storage or tankless water heater, prior to its natural end of life, and replacement with a new unit meeting program EF requirements. Savings are calculated between existing unit and efficient unit consumption during the remaining life of the existing unit, and between new baseline unit and efficient unit consumption for the remainder of the measure life.

This measure was developed to be applicable to the following program types: TOS, NC, EREP.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a residential gas-fired storage water heater with a maximum heat input rating of 75,000 Btu/hr or a tankless water heater meeting the EF requirements within the table below.<sup>93</sup>

| Water Heater Type                           | EF   |
|---|------|
| Gas Storage $\geq 20$ gal and $\leq 55$ gal | 0.67 |
| Gas Storage $> 55$ gal and $\leq 100$ gal   | 0.77 |
| Gas Tankless                                | 0.90 |

#### DEFINITION OF BASELINE EQUIPMENT

Time of Sale or New Construction: The baseline equipment is assumed to be a new, gas-fired storage or tankless residential water heater meeting the minimum federal efficiency standards.<sup>94</sup> For 20 to 55 gallon tanks, the federal standard is calculated as  $0.675 - (0.0015 * \text{rated storage size in gallons})$ , for 55 - 100 gallon tanks, the calculation is  $0.8012 - (0.00078 * \text{rated storage size in gallons})$ , and for tankless units, the calculation is  $0.82 - (0.0019 * \text{rated storage size in gallons})$ .

Early Replacement: The baseline is the efficiency of the existing gas water heater for the remaining useful life of the unit and the efficiency of a new gas water heater meeting minimum federal efficiency standards for the remainder of the measure life.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

Time of Sale or New Construction: The expected measure life is assumed to be 13 years for a gas storage water heater and 20 years for a gas tankless water heater.<sup>95</sup>

For Early Replacement: The remaining life of existing equipment is assumed to be 3.67 for gas storage

<sup>93</sup> ENERGY STAR® Product Specification for Residential Water Heaters, Version 3.0, effective April 16, 2015

<sup>94</sup> Minimum federal standard as of 4/16/2015;

<http://www.gpo.gov/fdsys/pkg/CFR-2012-title10-vol3/pdf/CFR-2012-title10-vol3-sec430-32.pdf>

<sup>95</sup> 2010 Residential Heating Products Final Rule Technical Support Document, U.S. DOE, Table 8.7.1.

water heaters and 6.67 years for gas tankless water heaters.<sup>96</sup>

**DEEMED MEASURE COST**

Time of Sale or New Construction: The incremental capital cost for this measure is dependent on the type of water heater, as listed below.<sup>97</sup>

Early Replacement: The full installed cost is provided in the table below. The assumed deferred cost (after 4 years) of replacing existing equipment with a new baseline unit is assumed to be \$799 for storage units 20 gal and ≤55 gal, and \$593 for tankless units.<sup>98</sup> This cost should be discounted to present value using the utility’s discount rate.

Actual costs should be used where available.

| Water Heater Type               | Incremental Cost | Full Install Cost <sup>99</sup> |
|---------------------------------|------------------|---------------------------------|
| Gas Storage ≥20 gal and ≤55 gal | \$256            | \$1,055                         |
| Gas Tankless                    | \$510            | \$1,103                         |

**LOADSHAPE**

Water Heating RES

---



---

**Algorithm**

---



---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

Time of Sale or New Construction:

$$\Delta Therms = (1/EF_{Base} - 1/EF_{EE}) * (GPD * Household * 365.25 * \gamma_{Water} * (T_{Out} - T_{In}) * 1.0) / 100,000$$

Early Replacement:<sup>100</sup>

ΔTherms for remaining life of existing unit (1st 3.67 years for gas storage unit and 1<sup>st</sup> 6.67 years

---

<sup>96</sup> Database for Energy-Efficiency Resources (DEER), “DEER2014 EUL Table Update,” California Public Utilities Commission, February 4, 2014.

<sup>97</sup> Cost information is based upon data from “2010-2012 WA017 Ex Ante Measure Cost Study Draft Report”, Itron, February 28, 2014. See “NR HW Heater\_WA017\_MCS Results Matrix - Volume I\_August2016.xls” for more information.

<sup>98</sup> Cost information is based upon data from “2010-2012 WA017 Ex Ante Measure Cost Study Draft Report”, Itron, February 28, 2014. See “NR HW Heater\_WA017\_MCS Results Matrix - Volume I.xls” for more information.

<sup>99</sup> Full install costs reflect 4.54 hours of labor at a labor rate of \$78.19 per hour.

<sup>100</sup> The two equations are provided to show how savings are determined during the initial phase of the measure (existing to efficient) and the remaining phase (new baseline to efficient). In practice, the screening tools used may require a first year savings calculation (using the first equation) and then a “number of years to adjustment” and “savings adjustment” input, which would be the (new base to efficient savings)/(existing to efficient savings).

for gas tankless unit):

$$\Delta Therms = (1/EF_{Existing} - 1/EF_{EE}) * (GPD * Household * 365.25 * \gamma_{Water} * (T_{Out} - T_{In}) * 1.0) / 100,000$$

$\Delta$ Therms for remaining measure life (next 7.33 years for gas storage unit and next 13.33 years for gas tankless unit):

$$\Delta Therms = (1/EF_{Base} - 1/EF_{EE}) * (GPD * Household * 365.25 * \gamma_{Water} * (T_{Out} - T_{In}) * 1.0) / 100,000$$

Where:

- EF<sub>Base</sub> = EF of standard gas water heater according to federal standards
  - = For gas storage water heaters with storage capacity  $\geq 20$  gallons and  $\leq 55$  gallons:  $0.675 - (0.0015 * \text{storage capacity in gallons})$
  - = For gas storage water heaters with storage capacity  $> 55$  gallons and  $\leq 100$  gallons:  $0.8012 - (0.00078 * \text{storage capacity in gallons})$
  - = For gas tankless water heaters:  $0.82 - (0.0019 * \text{storage capacity in gallons})$
  - = If tank size is unknown, assume 0.600 for a gas storage water heater with a 50-gallon storage capacity and 0.82 for a gas tankless water heater with a 0-gallon storage capacity
- EF<sub>EE</sub> = EF of efficient gas water heater
  - = Actual or if unknown, assume 0.67 for gas storage water heaters  $\leq 55$  gallons, 0.77 for gas storage water heaters  $> 55$  gallons and 0.90 for gas tankless water heaters<sup>101</sup>
- EF<sub>Existing</sub> = EF of existing gas water heater
  - = Actual or if unknown, assume 0.52<sup>102</sup>
- GPD = Gallons per day of hot water use per person
  - = 17.6<sup>103</sup>
- Household = Average number of people per household

| Household Unit Type <sup>104</sup> | Household   |
|------------------------------------|---|
| Single-Family - Deemed             | 2.67 <sup>105</sup>                                   |
| Multi-Family - Deemed              | 2.07 <sup>106</sup>                                   |
| Custom                             | Actual Occupancy or Number of Bedrooms <sup>107</sup> |

<sup>101</sup> ENERGY STAR® Product Specification for Residential Water Heaters, Version 3.0, effective April 16, 2015

<sup>102</sup> Based on DCEO Efficient Living Program Data for a sample size of 157 gas water heaters.

<sup>103</sup> GPD based on 45.5 gallons of hot water per day per household and 2.59 people per household, from Residential End Uses of Water Study 2013 Update. Prepared by Deoreo, B., and P. Mayer for the Water Research Foundation, 2014.

<sup>104</sup> If household type is unknown, as may be the case for time of sale measures, then single family deemed value shall be used.

<sup>105</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Planning Year 2015, prepared by Cadmus.

<sup>106</sup> Ameren Missouri Efficient Products Impact and Process Evaluation: Planning Year 2015, prepared by Cadmus.

<sup>107</sup> Bedrooms are suitable proxies for household occupancy, and may be preferable to actual occupancy due to turnover rates in residency and non-adult population impacts.

|                         |   |
|-------------------------|---|
| 365.25                  | = Number of days per year   |
| $\gamma_{\text{Water}}$ | = Specific weight of water<br>= 8.33 pounds per gallon                                  |
| $T_{\text{Out}}$        | = Tank temperature<br>= Actual, if unknown assume 125°F                                 |
| $T_{\text{In}}$         | = Incoming water temperature from well or municipal system<br>= 57.898°F <sup>108</sup> |
| 1.0                     | = Heat capacity of water (1 Btu/lb*°F)  |
| 100,000                 | = Conversion factor from Btu to therms  |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>108</sup> Using 40" deep soil temp as a proxy at Powell Gardens SCAN site. Average by month of available data from 3/28/02–10/11/14: 12 month average is 57.898. <http://www.wcc.nrcs.usda.gov/nwcc/site?sitenum=2061>

### 3.2.4 Water Heater Wrap

#### DESCRIPTION

This measure applies to a tank wrap or insulation “blanket” that is wrapped around the outside of an electric or gas domestic hot water (DHW) tank to reduce stand-by losses.

This measure was developed to be applicable to the following program types: DI, RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The efficient condition is an electric or gas DHW tank with wrap installed that has an R-value that meets program requirements.

#### DEFINITION OF BASELINE EQUIPMENT

The baseline condition is an uninsulated, electric or gas DHW tank.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The measure life is assumed to be 12 years.<sup>109</sup>

#### DEEMED MEASURE COST

The measure cost is the actual cost of material and installation. If actual costs are unknown, assume \$58<sup>110</sup> for material and installation.

#### LOADSHAPE

Water Heating RES

---

### Algorithm

---

#### CALCULATION OF SAVINGS

##### ELECTRIC ENERGY SAVINGS

Custom calculation below for electric DHW tanks, otherwise use default values from table that follows:

$$\Delta kWh = ((A_{Base}/R_{Base} - A_{EE}/R_{EE}) * \Delta T * Hours) / (\eta_{DHW_{Elec}} * 3,412)$$

Where:

- $A_{Base}$  = Surface area (ft<sup>2</sup>) of storage tank prior to adding tank wrap<sup>111</sup>
- = Actual or if unknown, use default based on tank capacity (gal) from table below
- $R_{Base}$  = Thermal resistance coefficient (hr-°F-ft<sup>2</sup>/BTU) of uninsulated tank

---

<sup>109</sup> 2014 Database for Energy-Efficiency Resources (DEER), Version 2014, “Cost Values and Summary Documentation”, California Public Utilities Commission, January, 2014. Average of values for electric DHW (13 years) and gas DHW (11 years).

<sup>110</sup> Average cost of R-10 tank wrap installation from the National Renewable Energy Laboratory’s National Residential Efficiency Measures Database. <http://www.nrel.gov/ap/retrofits/measures.cfm?gId=6&ctId=270>

<sup>111</sup> Area includes tank sides and top to account for typical wrap coverage.

- = Actual or if unknown, assume 14<sup>112</sup>
- $A_{EE}$  = Surface area (ft<sup>2</sup>) of storage tank after addition of tank wrap<sup>113</sup>
- = Actual or if unknown, use default based on tank capacity (gal) from table below
- $R_{EE}$  = Thermal resistance coefficient ((hr-°F-ft<sup>2</sup>/BTU) of tank after addition of tank wrap (R-value of uninsulated tank + R-value of tank wrap)
- = Actual or if unknown, assume 24
- $\Delta T$  = Average temperature difference (°F) between tank water and outside air
- = Actual or if unknown, assume 60°F<sup>114</sup>
- Hours = Hours per year
- = 8,766
- $\eta_{DHW_{Elec}}$  = Recovery efficiency of electric hot water heater
- = Actual or if unknown, assume 0.98<sup>115</sup>
- 3,412 = Conversion factor from Btu to kWh

The following table contains default savings for various tank capacities.

| Capacity (gal) | $A_{Base}$ (ft <sup>2</sup> ) <sup>116</sup> | $A_{EE}$ (ft <sup>2</sup> ) <sup>117</sup> | $\Delta kWh$ | $\Delta kW$ |
|----------------|--|--|--------------|-------------|
| 30             | 19.16  | 20.94                                      | 78.0         | 0.00890     |
| 40             | 23.18  | 25.31                                      | 94.6         | 0.01079     |
| 50             | 24.99  | 27.06                                      | 103.4        | 0.01180     |
| 80             | 31.84  | 34.14                                      | 134.0        | 0.01528     |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

- $\Delta kWh$  = Electric energy savings, as calculated above.
- CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor
- = 0.0000887318<sup>118</sup>

The table above contains default kW savings for various tank capacities.

<sup>112</sup> Baseline R-value based on information from Chapter 6 of The Virginia Energy Savers Handbook, Third Edition: The best heaters have 2 to 3 inches of urethane foam, providing R-values as high as R-20. Other less expensive models have fiberglass tank insulation with R-values ranging between R-7 and R-10.

<sup>113</sup> Area includes tank sides and top to account for typical wrap coverage.

<sup>114</sup> Assumes 125°F hot water tank temperature and average basement temperature of 65°F.

<sup>115</sup> Electric water heater recovery efficiency from AHRI database: <http://www.ahridirectory.org/ahridirectory/pages/home.aspx>

<sup>116</sup> Surface area assumptions from the June 2016 Pennsylvania TRM. Area values were calculated from average dimensions of several commercially available units, with radius values measured to the center of the insulation. Area includes tank sides and top to account for typical wrap coverage.

<sup>117</sup> Surface area assumptions from the June 2016 Pennsylvania TRM.  $A_{EE}$  was calculated by assuming that the water heater wrap is a 2” thick fiberglass material.

<sup>118</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Residential Water Heating. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

**NATURAL GAS SAVINGS**

Custom calculation below for gas DHW tanks, otherwise use default values from table that follows:

$$\Delta Therms = ((A_{Base}/R_{Base} - A_{EE}/R_{EE}) * \Delta T * Hours) / (\eta_{DHW_{Gas}} * 100,000)$$

Where:

$\eta_{DHW_{Gas}}$  = Recovery efficiency of gas hot water heater  
 = 0.78<sup>119</sup>

100,000 = Conversion factor from Btu to therms

Other variables as defined above

The following table contains default savings for various tank capacities.

| Capacity (gal) | A <sub>Base</sub> (ft <sup>2</sup> ) <sup>120</sup> | A <sub>EE</sub> (ft <sup>2</sup> ) <sup>121</sup> | $\Delta$ Therms | $\Delta$ PeakTherms |
|----------------|---|---|-----------------|---------------------|
| 30             | 19.16   | 20.94   | 3.3             | 0.0092              |
| 40             | 23.18   | 25.31   | 4.1             | 0.0111              |
| 50             | 24.99   | 27.06   | 4.4             | 0.0121              |
| 80             | 31.84   | 34.14   | 5.7             | 0.0157              |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>119</sup> Review of AHRI directory suggests range of recovery efficiency ratings for new gas DHW units of 70-87%. Average of existing units is estimated at 78%.

<sup>120</sup> Area values were calculated from average dimensions of several commercially available units, with radius values measured to the center of the insulation. Area includes tank sides and top to account for typical wrap coverage. Recommend updating with MO-specific data when available.

<sup>121</sup> A<sub>EE</sub> was calculated by assuming that the water heater wrap is a 2” thick fiberglass material. Recommend updating with MO-specific data when available.

### 3.2.5 Hot Water Pipe Insulation

#### DESCRIPTION

This measure applies to the addition of insulation to uninsulated domestic hot water (DHW) pipes. The measure assumes the pipe wrap is installed on the first length of both the hot and cold pipe up to the first elbow. This is the most cost-effective section to insulate since the water pipes act as an extension of the hot water tank up to the first elbow, which acts as a heat trap. Insulating this section helps to reduce standby losses.

This measure was developed to be applicable to the following program types: DI, RF

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The efficient condition is a domestic hot or cold water pipe with pipe wrap installed that has an R value that meets program requirements.

#### DEFINITION OF BASELINE EQUIPMENT

The baseline condition is an uninsulated, domestic hot or cold water pipe.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 12 years.<sup>122</sup>

#### DEEMED MEASURE COST

The measure cost is the actual cost of material and installation. If the actual cost is unknown, assume a default cost of \$7.10<sup>123</sup> per linear foot, including material and installation.

#### LOADSHAPE

Water Heating RES

---

### Algorithm

---

#### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

Custom calculation below for electric systems, otherwise assume 24.7 kWh per 6 linear feet of ¾ in, R-4 insulation or 35.4 kWh per 6 linear feet of 1 in, R-6 insulation:

$$\Delta kWh = ((C_{Base}/R_{Base} - C_{EE}/R_{EE}) * L * \Delta T * Hours) / (\eta_{DHW_{Elec}} * 3,412)$$

Where:

$C_{Base}$  = Circumference (ft) of uninsulated pipe

---

<sup>122</sup> 2014 Database for Energy-Efficiency Resources (DEER), Version 2014, “Cost Values and Summary Documentation”, California Public Utilities Commission, January, 2014. Average of values for electric DHW (13 years) and gas DHW (11 years).

<sup>123</sup> Average cost of R-5 pipe wrap installation from the National Renewable Energy Laboratory’s National Residential Efficiency Measures Database. <http://www.nrel.gov/ap/retrofits/measures.cfm?gId=6&ctId=323>



|                     |  |
|---------------------|--|
|                     | = Diameter (in) * $\pi/12$   |
|                     | = Actual or if unknown, assume 0.131 ft for a pipe with a 0.50 inch diameter   |
| $R_{Base}$          | = Thermal resistance coefficient (hr-°F-ft <sup>2</sup> )/Btu of uninsulated pipe  |
|                     | = 1.0 <sup>124</sup>   |
| $C_{EE}$            | = Circumference (ft) of insulated pipe   |
|                     | = Diameter (in) * $\pi/12$   |
|                     | = Actual or if unknown, assume 0.524 ft for a 0.50 in diameter pipe insulated with 3/4 in, R-4 wrap $((0.5 + 3/4 + 3/4) * \pi/12)$ or 0.654 ft for a 0.50 in diameter pipe insulated with 1 in, R-6 wrap $((0.5 + 1 + 1) * \pi/12)$ <sup>125</sup> |
| $R_{EE}$            | = Thermal resistance coefficient (hr-°F-ft <sup>2</sup> )/Btu of insulated pipe  |
|                     | = 1.0 + R value of insulation  |
|                     | = Actual or if unknown, assume 5.0 for R-4 wrap or 7.0 for R-6 wrap  |
| $L$                 | = Length of pipe from water heating source covered by pipe wrap (ft)   |
|                     | = Actual or if unknown, assume 6 ft  |
| $\Delta T$          | = Average temperature difference (°F) between supplied water and outside air   |
|                     | = Actual or if unknown, assume 60°F <sup>126</sup>   |
| Hours               | = Hours per year   |
|                     | = 8,766  |
| $\eta_{DHW_{Elec}}$ | = Recovery efficiency of electric hot water heater   |
|                     | = Actual or if unknown, assume 0.98 <sup>127</sup>   |
| 3,412               | = Conversion factor from Btu to kWh  |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

|              |   |
|--------------|---|
| $\Delta kWh$ | = Electric energy savings, as calculated above.                     |
| CF           | = Summer peak coincidence demand (kW) to annual energy (kWh) factor |
|              | = 0.0000887318  |

**NATURAL GAS SAVINGS**

Custom calculation below for gas DHW systems, otherwise assume 1.1 therms per 6 linear feet of ¾ in, R-4 insulation or 1.5 therms per 6 linear feet of 1 in, R-6 insulation:

---

<sup>124</sup> “Measures and Assumptions for Demand Side Management (DSM) Planning; Appendix C Substantiation Sheets,” Navigant, April 2009.

<sup>125</sup> Pipe wrap thicknesses based on review of available products on Grainger.com

<sup>126</sup> Assumes 125°F water leaving the hot water tank and average basement temperature of 65°F.

<sup>127</sup> Electric water heater recovery efficiency from AHRI database: <http://www.ahridirectory.org/ahridirectory/pages/home.aspx>

$$\Delta Therms = ((C_{Base}/R_{Base} - C_{EE}/R_{EE}) * L * \Delta T * Hours) / (\eta_{DHW_{Gas}} * 100,000)$$

Where:

$\eta_{DHW_{Gas}}$  = Recovery efficiency of gas hot water heater  
= 0.78<sup>128</sup>

100,000 = Conversion factor from Btu to therms

Other variables as defined above

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>128</sup> Review of AHRI directory suggests range of recovery efficiency ratings for new gas DHW units of 70-87%. Average of existing units is estimated at 78%.

### 3.2.6 Thermostatic Restrictor Shower Valve

#### DESCRIPTION

The measure is the installation of a thermostatic restrictor shower valve in a single or multi-family household. This is a valve attached to a residential showerhead which restricts hot water flow through the showerhead once the water reaches a set point (generally 95F or lower).

This measure was developed to be applicable to the following program types: RF, NC, DI. If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure the installed equipment must be a thermostatic restrictor shower valve installed on a residential showerhead.

#### DEFINITION OF BASELINE EQUIPMENT

The baseline equipment is the residential showerhead without the restrictor valve installed.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 10 years.<sup>129</sup>

#### DEEMED MEASURE COST

The incremental cost of the measure should be the actual program cost (including labor if applicable) or \$30<sup>130</sup> plus \$20 labor<sup>131</sup> if not available.

#### LOADSHAPE

Water Heating RES

#### COINCIDENCE FACTOR

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
= 0.0000887318

---

<sup>129</sup> Assumptions based on NY TRM, Pacific Gas and Electric Company Work Paper PGECODHW113, and measure life of low-flow showerhead

<sup>130</sup> Based on actual cost of the SS-1002CP-SB Ladybug Water-Saving Shower-Head adapter from Evolve showerheads.

<sup>131</sup> Estimate for contractor installation time.

**Algorithm**

**Calculation of Energy Savings**

**Electric Energy Savings**

$$\Delta kWh = \%ElectricDHW * ((GPM\_base\_S * L\_showerdevice) * Household * SPCD * 365.25 / SPH) * EPG\_electric * ISR$$

Where:

$\%ElectricDHW$  = proportion of water heating supplied by electric resistance heating

| DHW fuel    | $\%ElectricDHW$    |
|-------------|--------------------|
| Electric    | 100%               |
| Natural Gas | 0%                 |
| Unknown     | 16% <sup>132</sup> |

$GPM\_base\_S$  = Flow rate of the base case showerhead, or actual if available

| Program  | GPM  |
|--|--|
| Direct-install, device only  | 1.5 <sup>133</sup>                                   |
| New Construction or direct install of device and low flow showerhead | Rated or actual flow of program-installed showerhead |
| Retrofit or TOS  | 2.35 <sup>134</sup>                                  |

$L\_showerdevice$  = Hot water waste time avoided due to thermostatic restrictor valve  
 = 0.89 minutes<sup>135</sup>

Household = Average number of people per household

---

<sup>132</sup> Default assumption for unknown fuel is based on EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of IL. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area then that should be used

<sup>133</sup> Illinois Statewide Technical Reference Manual for Energy Efficiency Version 5.0. pp. 184. 2016. Available Online: [http://ilsagfiles.org/SAG\\_files/Technical\\_Reference\\_Manual/Version\\_5/Final/IL-TRM\\_Version\\_5.0\\_dated\\_February-11-2016\\_Final\\_Compiled\\_Volumes\\_1-4.pdf](http://ilsagfiles.org/SAG_files/Technical_Reference_Manual/Version_5/Final/IL-TRM_Version_5.0_dated_February-11-2016_Final_Compiled_Volumes_1-4.pdf). Assumes low flow showerhead is included in direct installation.

<sup>134</sup> Representative value from sources 1, 2, 4, 5, 6 and 7 (See Source Table at end of measure section) adjusted slightly upward to account for program participation which is expected to target customers with existing higher flow devices rather than those with existing low flow devices.

<sup>135</sup> Average of the following sources: ShowerStart LLC survey; “Identifying, Quantifying and Reducing Behavioral Waste in the Shower: Exploring the Savings Potential of ShowerStart”, City of San Diego Water Department survey; “Water Conservation Program: ShowerStart Pilot Project White Paper”, and PG&E Work Paper PGECODHW113.

| Household Unit Type <sup>136</sup> | Household   |
|------------------------------------|---|
| Single-Family - Deemed             | 2.67 <sup>137</sup>                                   |
| Multi-Family - Deemed              | 2.07 <sup>138</sup>                                   |
| Custom                             | Actual Occupancy or Number of Bedrooms <sup>139</sup> |

SPCD = Showers Per Capita Per Day  
 = 0.66<sup>140</sup>

365.25 = Days per year, on average.

SPH = Showerheads Per Household so that per-showerhead savings fractions can be determined

| Household Type | SPH                 |
|----------------|---------------------|
| Single-Family  | 2.05 <sup>141</sup> |
| Multi-Family   | 1.4 <sup>142</sup>  |
| Custom         | Actual              |

EPG\_electric = Energy per gallon of hot water supplied by electric  
 =  $(8.33 * 1.0 * (\text{ShowerTemp} - \text{SupplyTemp})) / (\text{RE\_electric} * 3412)$   
 =  $(8.33 * 1.0 * (105 - 61.3)) / (0.98 * 3412)$   
 = 0.109 kWh/gal

8.33 = Specific weight of water (lbs/gallon)

1.0 = Heat Capacity of water (btu/lb-°)

ShowerTemp = Assumed temperature of water  
 = 105F<sup>143</sup>

SupplyTemp = Assumed temperature of water entering house

<sup>136</sup> If household type is unknown, as may be the case for time of sale measures, then single family deemed value shall be used.

<sup>137</sup> MO TRM 2017 - Low Flow Showerheads 3.3.2

<sup>138</sup> MO TRM 2017 - Low Flow Showerheads 3.3.2

<sup>139</sup> Bedrooms are suitable proxies for household occupancy, and may be preferable to actual occupancy due to turnover rates in residency and non-adult population impacts.

<sup>140</sup> DeOreo, William, P. Mayer, L. Martien, M. Hayden, A. Funk, M. Kramer-Duffield, and R. Davis (2011). “California SingleFamily Water Use Efficiency Study.”

<sup>141</sup> MO TRM 2017 - Low Flow Showerheads 3.3.2

<sup>142</sup> MO TRM 2017 - Low Flow Showerheads 3.3.2

<sup>143</sup> Illinois Statewide Technical Reference Manual for Energy Efficiency Version 5.0. 2016. pp 103. Available Online: [http://ilsagfiles.org/SAG\\_files/Technical\\_Reference\\_Manual/Version\\_5/Final/IL-TRM\\_Version\\_5.0\\_dated\\_February-11-2016\\_Final\\_Compiled\\_Volumes\\_1-4.pdf](http://ilsagfiles.org/SAG_files/Technical_Reference_Manual/Version_5/Final/IL-TRM_Version_5.0_dated_February-11-2016_Final_Compiled_Volumes_1-4.pdf)

$$= 61.3F^{144}$$

RE\_electric = Recovery efficiency of electric water heater  
 = 98%<sup>145</sup>

3412 = Converts Btu to kWh (btu/kWh)

ISR = In service rate of showerhead

= Dependent on program delivery method as listed in table below

| Selection                      | ISR                                 |
|--------------------------------|-------------------------------------|
| Direct Install - Single Family | 0.91                                |
| Direct Install – Multi Family  | 0.91 <sup>146</sup>                 |
| Efficiency Kits                | To be determined through evaluation |

**EXAMPLE**

For example, a direct installed valve in a single-family home with electric DHW:

$$\begin{aligned} \Delta kWh &= 1.0 * (2.67 * 0.89 * 1.5 * 0.66 * 365.25 / 2.05) * 0.108 * 0.91 \\ &= 42 kWh \end{aligned}$$

**Summer Coincident Peak Demand Savings**

$$\Delta kW = \Delta kWh/Hours * CF$$

Where:

$\Delta kWh$  = calculated value above

Hours = Annual electric DHW recovery hours for wasted showerhead use prevented by device

$$= ((GPM\_base\_S * L\_showerdevice) * Household * SPCD * 365.25) * 0.712^{147} / GPH$$

GPH = Gallons per hour recovery of electric water heater calculated for 65.9F temp rise (120-54.1), 98% recovery efficiency, and typical 4.5kW electric resistance storage tank.

$$= 27.51$$

$$= 34.4 \text{ for SF Direct Install; } 28.3 \text{ for MF Direct Install}$$

$$= 30.3 \text{ for SF Retrofit and TOS; } 24.8 \text{ for MF Retrofit and TOS}$$

Water

Heating

RES

<sup>144</sup> Ameren Missouri 2012 Technical Resource Manual. Appendix A. pp. 43. Available online: <https://www.efis.psc.mo.gov/mpsc/commoncomponents/viewdocument.asp?DocId=935658483>

<sup>145</sup> Electric water heaters have recovery efficiency of 98%:

<http://www.ahridirectory.org/ahridirectory/pages/home.aspx>

<sup>146</sup> Based upon Ameren Missouri Community Savers Evaluation

<sup>147</sup> 71.2% is the proportion of hot 120F water mixed with 54.1F supply water to give 101F shower water.

**EXAMPLE**

For example, a direct installed thermostatic restrictor device in a single family home with electric DHW where the number of showers is not known.

$$\begin{aligned} \Delta kW &= 85.3/34.4 * 0.0022 \\ &= 0.0055 \text{ kW} \end{aligned}$$

**Natural Gas Savings**

$$\Delta \text{Therms} = \% \text{FossilDHW} * ((\text{GPM\_base\_S} * \text{L\_showerdevice}) * \text{Household} * \text{SPCD} * 365.25 / \text{SPH}) * \text{EPG\_gas} * \text{ISR}$$

Where:

$\% \text{FossilDHW}$  = proportion of water heating supplied by Natural Gas heating

| DHW fuel    | $\% \text{Fossil\_DHW}$ |
|-------------|-------------------------|
| Electric    | 0%                      |
| Natural Gas | 100%                    |
| Unknown     | 84% <sup>148</sup>      |

$\text{EPG\_gas}$  = Energy per gallon of Hot water supplied by gas

$$= (8.33 * 1.0 * (\text{ShowerTemp} - \text{SupplyTemp})) / (\text{RE\_gas} * 100,000)$$

= 0.00501 Therm/gal for SF homes

= 0.00583 Therm/gal for MF homes

$\text{RE\_gas}$  = Recovery efficiency of gas water heater

= 78% For SF homes<sup>149</sup>

= 67% For MF homes<sup>150</sup>

100,000 = Converts Btus to Therms (btu/Therm)

Other variables as defined above.

<sup>148</sup> Default assumption for unknown fuel is based on EIA Residential Energy Consumption Survey (RECS) 2009 for Midwest Region, data for the state of IL. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area then that should be used

<sup>149</sup> DOE Final Rule discusses Recovery Efficiency with an average around 0.76 for Gas Fired Storage Water heaters and 0.78 for standard efficiency gas fired tankless water heaters up to 0.95 for the highest efficiency gas fired condensing tankless water heaters. These numbers represent the range of new units however, not the range of existing units in stock. Review of AHRI Directory suggests range of recovery efficiency ratings for new Gas DHW units of 70-87%. Average of existing units is estimated at 78%.

<sup>150</sup> Water heating in multi-family buildings is often provided by a larger central boiler. This suggests that the average recovery efficiency is somewhere between a typical central boiler efficiency of 0.59 and the 0.75 for single family homes. An average efficiency of 0.67 is used for this analysis as a default for multi-family buildings.

**EXAMPLE**

For example, a direct installed thermostatic restrictor device in a gas fired DHW single family home where the number of showers is not known:

$$\begin{aligned} \Delta\text{Therms} &= 1.0 * ((2.67 * 0.89) * 2.56 * 0.6 * 365.25 / 1.79) * 0.00501 * 0.98 \\ &= 3.7 \text{ therms} \end{aligned}$$

**Water Impact Descriptions and Calculation**

$$\Delta\text{gallons} = ((\text{GPM\_base\_S} * \text{L\_showerdevice}) * \text{Household} * \text{SPCD} * 365.25 / \text{SPH}) * \text{ISR}$$

Variables as defined above

**EXAMPLE**

For example, a direct installed thermostatic restrictor device in a single family home where the number of showers is not known:

$$\begin{aligned} \Delta\text{gallons} &= ((2.67 * 0.89) * 2.56 * 0.6 * 365.25 / 1.79) * 0.98 \\ &= 730 \text{ gallons} \end{aligned}$$

**Deemed O&M Cost Adjustment Calculation**

N/A

**Sources**

| Source ID | Reference   |
|-----------|---|
| 1         | 2011, DeOreo, William. California Single Family Water Use Efficiency Study. April 20, 2011.   |
| 2         | 2000, Mayer, Peter, William DeOreo, and David Lewis. Seattle Home Water Conservation Study. December 2000.  |
| 3         | 1999, Mayer, Peter, William DeOreo. Residential End Uses of Water. Published by AWWA Research Foundation and American Water Works Association. 1999.  |
| 4         | 2003, Mayer, Peter, William DeOreo. Residential Indoor Water Conservation Study. Aquacraft, Inc. Water Engineering and Management. Prepared for East Bay Municipal Utility District and the US EPA. July 2003.                      |
| 5         | 2011, DeOreo, William. Analysis of Water Use in New Single Family Homes. By Aquacraft. For Salt Lake City Corporation and US EPA. July 20, 2011.  |
| 6         | 2011, Aquacraft. Albuquerque Single Family Water Use Efficiency and Retrofit Study. For Albuquerque Bernalillo County Water Utility Authority. December 1, 2011.  |
| 7         | 2008, Schultdt, Marc, and Debra Tachibana. Energy related Water Fixture Measurements: Securing the Baseline for Northwest Single Family Homes. 2008 ACEEE Summer Study on Energy Efficiency in Buildings.                           |
| 8         | 2011, Lutz, Jim. “Water and Energy Wasted During Residential Shower Events: Findings from a Pilot Field Study of Hot Water Distribution Systems”, Energy Analysis Department Lawrence Berkeley National Laboratory, September 2011. |
| 9         | 2008, Water Conservation Program: ShowerStart Pilot Project White Paper, City of San Diego,   |



| Source ID | Reference   |
|-----------|---|
|           | CA.   |
| 10        | 2012, Pacific Gas and Electric Company, Work Paper PGECODHW113, Low Flow Showerhead and Thermostatic Shower Restriction Valve, Revision # 4, August 2012.                       |
| 11        | 2008, “Simply & Cost Effectively Reducing Shower Based Warm-Up Waste: Increasing Convenience & Conservation by Attaching ShowerStart to Existing Showerheads”, ShowerStart LLC. |
| 12        | 2014, New York State Record of Revision to the TRM, Case 07-M-0548, June 19, 2014.  |

**3.2.7 Hot Water Measure Kit**

*This measure was not characterized for Version 1 of the Natural Gas Statewide TRM.*

### 3.3 HVAC End Use

#### 3.3.1 Advanced Thermostat

##### DESCRIPTION

This measure characterizes the household energy savings from the installation of a new thermostat(s) for reduced heating and cooling consumption through a configurable schedule of temperature setpoints (like a programmable thermostat) *and* automatic variations to that schedule to better match HVAC system runtimes to meet occupant comfort needs. These schedules may be defaults, established through user interaction, and be changed manually at the device or remotely through a web or mobile app. Automatic variations to that schedule could be driven by local sensors and software algorithms, and/or through connectivity to an internet software service. Data triggers to automatic schedule changes might include, for example: occupancy/activity detection, arrival & departure of conditioned spaces, optimization based on historical or population-specific trends, weather data and forecasts.<sup>151</sup> This class of products and services are relatively new, diverse, and rapidly changing. Generally, the savings expected for this measure aren't yet established at the level of individual features, but rather at the system level and how it performs overall. Like programmable thermostats, it is not suitable to assume that heating and cooling savings follow a similar pattern of usage and savings opportunity, and so here too this measure treats these savings independently. Note that it is a very active area of ongoing study to better map features to savings value, and establish standards of performance measurement based on field data so that a standard of efficiency can be developed.<sup>152</sup> That work is not yet complete but does inform the treatment of some aspects of this characterization and recommendations. Energy savings are applicable at the household level; all thermostats controlling household heat should be programmable and installation of multiple advanced thermostats per home does not accrue additional savings.

Note that though these devices and service could potentially be used as part of a demand response program, the costs, delivery, impacts, and other aspects of DR-specific program delivery are not included in this characterization at this time, though they could be added in the future.

This measure was developed to be applicable to the following program types: TOS, NC, RF, DI.

If applied to other program types, the measure savings should be verified.

##### DEFINITION OF EFFICIENT EQUIPMENT

The criteria for this measure are established by replacement of a manual-only or programmable thermostat, with one that has the default enabled capability—or the capability to automatically—establish a schedule of temperature setpoints according to driving device inputs above and beyond basic time and temperature data of conventional programmable thermostats. As summarized in the description, this category of products and services is broad and rapidly advancing in regards to their capability, usability, and sophistication, but at a minimum must be capable of two-way communication<sup>153</sup> and exceed the typical performance of manual and conventional programmable thermostats through the automatic or default

---

<sup>151</sup> For example, the capabilities of products and added services that use ultrasound, infrared, or geofencing sensor systems, automatically develop individual models of home's thermal properties through user interaction, and optimize system operation based on equipment type and performance traits based on weather forecasts demonstrate the type of automatic schedule change functionality that apply to this measure characterization.

<sup>152</sup> The ENERGY STAR® program discontinued its support for basic programmable thermostats effective 12/31/09, and is presently developing a new specification for 'Residential Climate Controls'.

<sup>153</sup> This measure recognizes that field data may be available, through this 2-way communication capability, to better inform characterization of efficiency criteria and savings calculations. It is recommended that program implementations incorporate this data into their planning and operation activities to improve understanding of the measure to manage risks and enhance savings results.

capabilities described above.

#### **DEFINITION OF BASELINE EQUIPMENT**

The baseline is either the actual type (manual or programmable) if it is known,<sup>154</sup> or an assumed mix of these two types based upon information available from evaluations or surveys that represent the population of program participants. This mix may vary by program, but as a default, 44% programmable and 56% manual thermostats may be assumed<sup>155</sup>.

#### **DEEMED LIFETIME OF EFFICIENT EQUIPMENT**

The expected measure life for advanced thermostats is assumed to be similar to that of a programmable thermostat 10 years<sup>156</sup> based upon equipment life only.<sup>157</sup>

#### **DEEMED MEASURE COST**

For DI and other programs for which installation services are provided, the actual material, labor, and other costs should be used. For retail, Bring Your Own Thermostat (BYOT) programs<sup>158</sup>, or other program types actual costs are still preferable<sup>159</sup> but if unknown then the average incremental cost for the new installation measure is assumed to be \$175<sup>160</sup>.

#### **LOADSHAPE**

Cooling RES

Heating RES (use only this loadshape for gas savings)

---

<sup>154</sup> If the actual thermostat is programmable and it is found to be used in override mode or otherwise effectively being operated like a manual thermostat, then the baseline may be considered to be a manual thermostat

<sup>155</sup> Value for blend of baseline thermostats comes from an IL Potential Study conducted by ComEd in 2013; Opinion Dynamics Corporation, “ComEd Residential Saturation/End Use, Market Penetration & Behavioral Study”, Appendix 3: Detailed Mail Survey Results, p34, April 2013.

<sup>156</sup> Table 1, HVAC Controls, Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007

<sup>157</sup> Future evaluation is strongly encouraged to inform the persistence of savings to further refine measure life assumption. As this characterization depends heavily upon a number of savings studies that only lasted a single year or less, the longer term impacts should be assessed.

<sup>158</sup> In contrast to program designs that utilize program affiliated contractors or other trade ally partners that support customer participation through thermostat distribution, installation and other services, BYOT programs enroll customers after the time of purchase through online rebate and program integration sign-ups.

<sup>159</sup> Including any one-time software integration or annual software maintenance, and or individual device energy feature fees.

<sup>160</sup> Market prices vary considerably in this category, generally increasing with thermostat capability and sophistication. The core suite of functions required by this measure's eligibility criteria are available on units readily available in the market roughly in the range of \$200 and \$250, excluding the availability of any wholesale or volume discounts. The assumed incremental cost is based on the middle of this range (\$225) minus a cost of \$50 for the baseline equipment blend of manual and programmable thermostats. Note that any add-on energy service costs, which may include one-time setup and/or annual per device costs are not included in this assumption.

**Algorithm**

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh^{161} = \Delta kWh_{heating} + \Delta kWh_{cooling}$$

$$\Delta kWh_{heating} = \%ElectricHeat * HeatingConsumption_{Electric} * HF * HeatingReduction * Eff_{ISR} + (\Delta Therms * Fe * 29.3)$$

$$\Delta kWh_{cool} = \%AC * ((EFLH_{cool} * CapacityCool * 1/SEER)/1000) * CoolingReduction * Eff_{ISR}$$

Where:

$\%ElectricHeat$  = Percentage of heating savings assumed to be electric

| Heating fuel | $\%ElectricHeat$   |
|--------------|--------------------|
| Electric     | 100%               |
| Natural Gas  | 0%                 |
| Unknown      | 35% <sup>162</sup> |

$HeatingConsumption_{Electric}$  = Estimate of annual household heating consumption for electrically heated single-family homes<sup>163</sup>.

| Climate Region<br>(City based upon) | Elec Heating Consumption (kWh) |                    |                                 |
|-------------------------------------|--------------------------------|--------------------|---------------------------------|
|                                     | Electric Resistance            | Electric Heat Pump | Unknown Electric <sup>164</sup> |
| North East (Fort Madison, IA)       | 17,940                         | 10,553             | 17,017                          |
| North West (Lincoln, NE)            | 19,664                         | 11,567             | 18,652                          |
| South East (Cape Girardeau, MO)     | 13,502                         | 7,943              | 12,807                          |
| South West (Kaiser, MO)             | 14,276                         | 8,398              | 13,541                          |
| St Louis, MO                        | 14,144                         | 8,320              | 13,416                          |
| Kansas City, MO                     | 16,272                         | 9,572              | 15,435                          |
| Average/Unknown (Knob Noster)       | 16,184                         | 9,520              | 15,351                          |

<sup>161</sup> Electrical savings are a function of both heating and cooling energy usage reductions. For heating this is a function of the percent of electric heat (heat pumps) and fan savings in the case of a natural gas furnace.

<sup>162</sup> Average (default) value of 35% electric space heating from 2009 Residential Energy Consumption Survey for Missouri. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area, then they should be used.

<sup>163</sup> Values in table are based on converting an average household heating load (834 therms) for Chicago based on Illinois furnace metering study ('Table E-1, Energy Efficiency/Demand Response Nicor Gas Plan Year 1: Research Report: Furnace Metering Study, Draft, Navigant, August 1 2013) to an electric heat load (divide by 0.03413) to electric resistance and ASHP heat load (resistance load reduced by 15% to account for distribution losses that occur in furnace heating but not in electric resistance while ASHP heat is assumed to suffer from similar distribution losses) and then to electric consumption assuming efficiencies of 100% for resistance and 200% for HP (see 'Thermostat\_FLH and Heat Load Calcs.xls'). The other climate region values are calculated using Climate Normals HDD data with a base temp ratio of 60°F. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. The calculations made in this measure have been based on HDD60. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions..

<sup>164</sup> Assumption that 12.5% of electrically heated homes in Missouri have Heat Pumps, based on 2009 Residential Energy Consumption Survey for Missouri.

HF = Household factor, to adjust heating consumption for non-single-family households.

| Household Type | HF                    |
|----------------|-----------------------|
| Single-Family  | 100%                  |
| Multi-Family   | 65% <sup>165</sup>    |
| Actual         | Custom <sup>166</sup> |

HeatingReduction = Assumed percentage reduction in total household heating energy consumption due to advanced thermostat

| Existing Thermostat Type | Heating_Reduction <sup>167</sup> |
|--------------------------|----------------------------------|
| Manual                   | 8.8%                             |
| Programmable             | 5.6%                             |
| Unknown (Blended)        | 7.4%                             |

Eff\_ISR = Effective In-Service Rate, the percentage of thermostats installed and configured effectively for 2-way communication

= If programs are evaluated during program deployment then custom ISR assumptions should be applied. If in service rate is captured within the savings percentage, ISR should be 100%. If using default savings, use 100%<sup>168</sup>.

ΔTherms = Therm savings if Natural Gas heating system

= See calculation in Natural Gas section below

F<sub>e</sub> = Furnace Fan energy consumption as a percentage of annual fuel consumption

= 3.14%<sup>169</sup>

29.3 = kWh per therm

%AC = Fraction of customers with thermostat-controlled air-conditioning

| Thermostat control of air conditioning? | %AC  |
|---|------|
| Yes                                     | 100% |

<sup>165</sup> Multifamily household heating consumption relative to single-family households is affected by overall household square footage and exposure to the exterior. This 65% reduction factor is applied to MF homes with electric resistance, based on professional judgment that average household size, and heat loads of MF households are smaller than single-family homes

<sup>166</sup> Program-specific household factors may be utilized on the basis of sufficiently validated program evaluations.

<sup>167</sup> These values represent adjusted baseline savings values for different existing thermostats as presented in Navigant’s IL TRM Workpaper on Impact Analysis from Preliminary Gas savings findings (page 28). The unknown assumption is calculated by multiplying the savings for manual and programmable thermostats by their respective share of baseline. Further evaluation and regular review of this key assumption is encouraged.

<sup>168</sup> As a function of the method for determining savings impact of these devices, in-service rate effects are already incorporated into the savings value for heating reduction above.

<sup>169</sup> F<sub>e</sub> is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy (Ef in MMBTU/yr) and Eae (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2% F<sub>e</sub>. See “Programmable Thermostats Furnace Fan Analysis.xlsx” for reference.

| Thermostat control of air conditioning? | %AC   |
|---|---|
| No                                      | 0%  |
| Unknown                                 | Actual population data, or 91% <sup>170</sup> |

EFLH<sub>cool</sub> = Equivalent full load hours of air conditioning  
 = dependent on location<sup>171</sup>:

| Climate Region (City based upon) | EFLH <sub>cool</sub> (Hours) |
|----------------------------------|------------------------------|
| North East (Fort Madison, IA)    | 642                          |
| North West (Lincoln, NE)         | 628                          |
| South East (Cape Girardeau, MO)  | 778                          |
| South West (Kaiser, MO)          | 719                          |
| St Louis, MO                     | 869                          |
| Kansas City, MO                  | 738                          |
| Average/Unknown (Knob Noster)    | 684                          |

CapacityCool = Capacity of Air Cooling system (Btu/hr) (Note: One ton is equal to 12,000 Btu/hr.)

= Actual installed - If actual size unknown, assume 36,000 Btu/h

SEER = the cooling equipment’s Seasonal Energy Efficiency Ratio rating (kBtu/kWh)

= Use actual SEER rating where it is possible to measure or reasonably estimate. If unknown assume 13<sup>172</sup>.

1/1000 = kBtu per Btu

CoolingReduction = Assumed percentage reduction in total household cooling energy consumption due to installation of advanced thermostat

= If programs are evaluated during program deployment then custom savings assumptions should be applied. Otherwise use:

= 8.0%<sup>173</sup>

<sup>170</sup> 91% of homes have central cooling in Missouri (based on 2009 Residential Energy Consumption Survey, see “RECS 2009 Air Conditioning\_hc7.9.xls”).

<sup>171</sup> Based on Full Load Hour assumptions (for St Louis and Kansas City) taken from the ENERGY STAR® calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 28.5% based on the evaluation results in Ameren territory suggesting an appropriate EFLH of 869. The other climate region values are calculated using the relative Climate Normals Cooling Degree Day ratios (at 65F set point).

<sup>172</sup> Based on Minimum Federal Standard; [http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/residential\\_cac\\_hp.html](http://www1.eere.energy.gov/buildings/appliance_standards/residential/residential_cac_hp.html).

<sup>173</sup> This assumption is based upon the review of many evaluations from other regions in the US. Cooling savings are more variable than heating due to significantly more variability in control methods and potential population and product capability.

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{cooling} * CF$$

Where:

$kWh_{cooling}$  = Electric energy savings for cooling, calculated above

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0009474181<sup>174</sup>

**NATURAL GAS ENERGY SAVINGS**

$$\Delta Therms = \%FossilHeat * HeatingConsumption_{Gas} * HF * HeatingReduction * Eff_{ISR}$$

Where:

$\%FossilHeat$  = Percentage of heating savings assumed to be Natural Gas

| Heating fuel | $\%FossilHeat$     |
|--------------|--------------------|
| Electric     | 0%                 |
| Natural Gas  | 100%               |
| Unknown      | 65% <sup>175</sup> |

$HeatingConsumption_{Gas}$

= Estimate of annual household heating consumption for gas heated single-family homes<sup>176</sup>.

| Climate Region (City based upon) | Gas Heating Consumption (Therms) |
|----------------------------------|----------------------------------|
| North East (Fort Madison, IA)    | 863                              |
| North West (Lincoln, NE)         | 946                              |
| South East (Cape Girardeau, MO)  | 649                              |
| South West (Kaiser, MO)          | 686                              |
| St Louis, MO                     | 680                              |

<sup>174</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Residential Cooling. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

<sup>175</sup> Average (default) value of 65% gas space heating from 2009 Residential Energy Consumption Survey for Missouri. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area, then they should be used.

<sup>176</sup> Values in table are based on average household heating load (834 therms) for Chicago based on Illinois furnace metering study (‘Table E-1, Energy Efficiency/Demand Response Nicor Gas Plan Year 1: Research Report: Furnace Metering Study, Draft, Navigant, August 1 2013) and adjusted for Missouri climate region values using the relative Climate Normal HDD data with a base temp ratio of 60°F. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. The calculations made in this measure have been based on HDD60. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions. This load value is then divided by standard assumption of existing unit efficiency of 83.5% (estimate based on 29% of furnaces purchased in Missouri were condensing in 2000 (based on data from GAMA, provided to Department of Energy) (see ‘Thermostat\_FLH and Heat Load Calcs.xls’). The resulting values are generally supported by data provided by Laclede Gas that showed an average pre-furnace replacement consumption of 1009 therms for St Louis, and a post-replacement consumption of 909. Assuming a typical hot water consumption at 225 therms (using defaults from <http://energy.gov/eere/femp/energy-cost-calculator-electric-and-gas-water-heaters-0#output>), this indicates a heating load of 684-784 therms.



| Climate Region<br>(City based upon) | Gas_Heating_<br>Consumption<br>(Therms) |
|-------------------------------------|---|
| Kansas City, MO                     | 783                                     |
| Average/Unknown (Knob Noster)       | 778                                     |

Other variables as provided above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

### 3.3.2 Boiler

#### DESCRIPTION

High-efficiency boilers achieve most gas savings through the use of a sealed combustion chamber and multiple heat exchangers that remove a significant portion of the waste heat from flue gases. Because multiple heat exchangers are used to remove waste heat from the escaping flue gases, some of the flue gases condense and must be drained.

This measure was developed to be applicable to the following program types: TOS, NC, EREP.

a) Time of Sale or New Construction:

The installation of a new, residential sized (<300,000 Btu/hr), high-efficiency, gas-fired hot water boiler in a residential location. This could relate to the replacement of an existing unit at the end of its useful life, or the installation of a new system in a new home.

b) Early Replacement:

The early removal of an existing, functional boiler from service, prior to its natural end of life, and replacement with a new, residential sized (<300,000 Btu/hr), high-efficiency, gas-fired hot water boiler in a residential location. Savings are based on the difference between the existing unit and efficient unit's consumption during the remaining life of the existing unit, and between the new baseline unit and efficient unit's consumption for the remainder of the measure life.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a new, residential sized (<300,000 Btu/hr), gas-fired hot water boiler with an annual fuel utilization efficiency (AFUE) rating that meets the minimum standards according to utility program requirements.

#### DEFINITION OF BASELINE EQUIPMENT

Time of Sale or New Construction: The baseline equipment is a new, residential sized (<300,000 Btu/hr), gas-fired hot water boiler with an AFUE rating that meets minimum federal energy efficiency standards.

Early Replacement: The baseline is the existing boiler, for the remaining useful life of the unit. For the remainder of the measure life, the baseline is a new boiler with an AFUE rating that meets minimum federal energy efficiency standards.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

Time of Sale or New Construction: The expected measure life is assumed to be 26.5 years.<sup>177</sup>

Early Replacement: The remaining life of the existing boiler is assumed to be 9 years.<sup>178</sup>

#### DEEMED MEASURE COST

The incremental cost for this measure depends on boiler type (hot water or steam) and efficiency, as listed in the table below.<sup>179</sup>

---

<sup>177</sup> Average lifetime from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Residential Boilers. U.S. Department of Energy, December 22, 2015.

<sup>178</sup> Assumed to be approximately one third of effective useful life.

<sup>179</sup> For boilers with input <300,000 Btu/hr, incremental costs are from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Residential Boilers. U.S. Department of Energy, December 22, 2015.

| Incremental Costs for Hot Water Boilers |                                       |   |
|---|---------------------------------------|---|
| Efficiency                              | Incremental Equipment Cost (Per Unit) | Incremental Total Installed Cost (Per Unit) |
| 83% AFUE                                | \$16                                  | \$16  |
| 84% AFUE                                | \$31                                  | \$31  |
| 85% AFUE                                | \$187                                 | \$278                                       |
| 90% AFUE                                | \$776                                 | \$884                                       |
| 92% AFUE                                | \$1,126                               | \$1,234                                     |
| 96% AFUE                                | \$3,899                               | \$1,924                                     |

| Incremental Costs for Steam Boilers |                                       |   |
|-------------------------------------|---------------------------------------|---|
| Efficiency                          | Incremental Equipment Cost (Per Unit) | Incremental Total Installed Cost (Per Unit) |
| 82% AFUE                            | \$40                                  | \$64  |
| 83% AFUE                            | \$319                                 | \$370                                       |

**LOADSHAPE**

Heating RES

---



---

**Algorithm**

---



---

**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

Time of Sale or New Construction:

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{AFUE_{EE} - AFUE_{Base}}{AFUE_{Base}} \right)}{100,000}$$

Early Replacement:

ΔTherms for remaining life of existing unit (first 9 years):

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{AFUE_{EE} - AFUE_{Exist}}{AFUE_{Exist}} \right)}{100,000}$$

ΔTherms for remaining measure life (next 17.5 years):

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{AFUE_{EE} - AFUE_{Base}}{AFUE_{Base}} \right)}{100,000}$$

Where:

EFLH = Equivalent full load hours for heating  
 = Dependent on location:<sup>180</sup>

| Climate Region (City based upon) | EFLH (Hours) |
|----------------------------------|--------------|
| North East (Fort Madison, IA)    | 2459         |
| North West (Lincoln, NE)         | 2695         |
| South East (Cape Girardeau, MO)  | 1851         |
| South West (Kaiser, MO)          | 1957         |
| St Louis, MO                     | 2009         |
| Kansas City, MO                  | 2149         |
| Average/Unknown (Knob Noster)    | 2218         |

Capacity = Nominal heating input capacity (Btu/hr) of efficient boiler  
 = Actual

AFUE<sub>EE</sub> = Efficiency rating of high efficiency boiler  
 = Actual

AFUE<sub>Base</sub> = Efficiency rating of baseline boiler  
 = 82% AFUE<sup>181</sup>

AFUE<sub>Exist</sub> = Efficiency rating of existing boiler  
 = Use actual AFUE rating where it is possible to measure or reasonably estimate.  
 If unknown, assume 61.6% AFUE.<sup>182</sup>

100,000 = Factor to convert Btus to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

**MEASURE CODE:**

---

<sup>180</sup> Based on Full Load Hour assumptions (for St Louis and Kansas City) taken from the ENERGY STAR® calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)). The other climate region values are calculated using the relative Climate Normals HDD data with a base temp ratio of 60°F. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. The calculations made in this measure have been based on HDD60. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions

<sup>181</sup> Federal efficiency standard for hot water, gas-fired residential boilers with input <300,000 Btu/hr from 10 CFR 431.87.

<sup>182</sup> Average nameplate efficiencies of all Early Replacement qualifying equipment in Ameren, IL PY3-PY4 (2010-2012).

### 3.3.3 Duct Sealing and Duct Repair

#### DESCRIPTION

This measure describes evaluating the savings associated with performing duct sealing to the distribution system of homes with central cooling and/or a ducted heating system. While sealing ducts in conditioned space can help with control and comfort, energy savings are largely limited to sealing ducts in unconditioned space where the heat loss is to outside the thermal envelope. Therefore, for this measure to be applicable, at least 30% of ducts should be within unconditioned space (e.g., attic with floor insulation, vented crawlspace, unheated garages. Basements should be considered conditioned space).

Three methodologies for estimating the savings associate from sealing the ducts are provided.

- 1. Modified Blower Door Subtraction** – this technique is described in detail on p. 44 of the Energy Conservatory Blower Door Manual; <http://dev.energyconservatory.com/wp-content/uploads/2014/07/Blower-Door-model-3-and-4.pdf>.  
It involves performing a whole house depressurization test and repeating the test with the ducts excluded.
- 2. Duct Blaster Testing** - as described in RESNET Test 803.7:  
[http://www.resnet.us/standards/DRAFT\\_Chapter\\_8\\_July\\_22.pdf](http://www.resnet.us/standards/DRAFT_Chapter_8_July_22.pdf)  
This involves using a blower door to pressurize the house to 25 Pascals and pressurizing the duct system using a duct blaster to reach equilibrium with the inside. The air required to reach equilibrium provides a duct leakage estimate.
- 3. Deemed Savings per Linear Foot** – this method provides a deemed conservative estimate of savings and should only be used where performance testing described above is not possible.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The efficient condition is sealed duct work throughout the unconditioned space in the home.

#### DEFINITION OF BASELINE EQUIPMENT

The existing baseline condition is leaky duct work with at least 30% of the ducts within the unconditioned space in the home.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The assumed lifetime of this measure is 20 years.<sup>183</sup>

#### DEEMED MEASURE COST

The actual duct sealing measure cost should be used.

#### LOADSHAPE

HVAC RES for electric savings

Heating RES (Use this loadshape for gas savings)

---

<sup>183</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.

**Algorithm**

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Methodology 1: Modified Blower Door Subtraction

- a. Determine Duct Leakage rate before and after performing duct sealing:

$$Duct\ Leakage\ (CFM50_{DL}) = (CFM50_{Whole\ House} - CFM50_{Envelope\ Only}) * SCF$$

Where:

CFM50<sub>Whole House</sub> = Standard Blower Door test result finding Cubic Feet per Minute at 50 Pascal pressure differential

CFM50<sub>Envelope Only</sub> = Blower Door test result finding Cubic Feet per Minute at 50 Pascal pressure differential with all supply and return registers sealed

SCF = Subtraction Correction Factor to account for underestimation of duct leakage due to connections between the duct system and the home. Determined by measuring pressure with respect to the building in the sealed duct system, with the building pressurized to 50 Pascals with respect to the outside. Use the following look up table provided by Energy Conservatory to determine the appropriate subtraction correction factor:

| House to Duct Pressure | Subtraction Correction Factor |
|------------------------|-------------------------------|
| 50                     | 1.00                          |
| 49                     | 1.09                          |
| 48                     | 1.14                          |
| 47                     | 1.19                          |
| 46                     | 1.24                          |
| 45                     | 1.29                          |
| 44                     | 1.34                          |
| 43                     | 1.39                          |
| 42                     | 1.44                          |
| 41                     | 1.49                          |
| 40                     | 1.54                          |
| 39                     | 1.60                          |
| 38                     | 1.65                          |
| 37                     | 1.71                          |
| 36                     | 1.78                          |
| 35                     | 1.84                          |
| 34                     | 1.91                          |
| 33                     | 1.98                          |
| 32                     | 2.06                          |
| 31                     | 2.14                          |

| House to Duct Pressure | Subtraction Correction Factor |
|------------------------|-------------------------------|
| 30                     | 2.23                          |
| 29                     | 2.32                          |
| 28                     | 2.42                          |
| 27                     | 2.52                          |
| 26                     | 2.64                          |
| 25                     | 2.76                          |
| 24                     | 2.89                          |
| 23                     | 3.03                          |
| 22                     | 3.18                          |
| 21                     | 3.35                          |
| 20                     | 3.54                          |
| 19                     | 3.74                          |
| 18                     | 3.97                          |
| 17                     | 4.23                          |
| 16                     | 4.51                          |
| 15                     | 4.83                          |
| 14                     | 5.20                          |
| 13                     | 5.63                          |
| 12                     | 6.12                          |
| 11                     | 6.71                          |

- b. Calculate duct leakage reduction, convert to CFM25<sub>DL</sub><sup>184</sup>, and factor in Supply and Return Loss Factors:

$$\text{Duct Leakage Reduction } (\Delta\text{CFM25}_{\text{DL}}) = (\text{Pre CFM50}_{\text{DL}} - \text{Post CFM50}_{\text{DL}}) * 0.64 * (\text{SLF} + \text{RLF})$$

Where:

- 0.64 = Converts CFM50<sub>DL</sub> to CFM25<sub>DL</sub><sup>185</sup>  
 SLF = Supply Loss Factor<sup>186</sup>  
 = % leaks sealed located in Supply ducts \* 1  
 Default = 0.5<sup>187</sup>  
 RLF = Return Loss Factor<sup>188</sup>  
 = % leaks sealed located in Return ducts \* 0.5  
 Default = 0.25<sup>189</sup>

- c. Calculate electric savings

$$\Delta kWh = \Delta kWh_{\text{Cooling}} + \Delta kWh_{\text{Heating}}$$

$$\Delta kWh_{\text{Cooling}} = \frac{\frac{\Delta\text{CFM25}_{\text{DL}}}{(\text{CapacityCool}/12000 * 400)} * \text{EFLHcool} * \text{CapacityCool}}{1000 * \text{SEER}}$$

$$\Delta kWh_{\text{Heating}_{\text{Electric}}} = \frac{\frac{\Delta\text{CFM25}_{\text{DL}}}{(\text{CapacityHeat}/12000 * 400)} * \text{EFLHheat} * \text{CapacityHeat}}{\text{COP} * 3412}$$

$$\Delta kWh_{\text{Heating}_{\text{Gas}}} = (\Delta\text{Therms} * \text{Fe} * 29.3)$$

Where:

- $\Delta\text{CFM25}_{\text{DL}}$  = Duct leakage reduction in CFM2 as calculated above  
 CapacityCool = Capacity of Air Cooling system (Btu/hr)  
 = Actual

---

<sup>184</sup> 25 Pascals is the standard assumption for typical pressures experienced in the duct system under normal operating conditions.

<sup>185</sup> To convert CFM50 to CFM25, multiply by 0.64 (inverse of the “Can’t Reach Fifty” factor for CFM25; see Energy Conservatory Blower Door Manual).

<sup>186</sup> Assumes that for each percent of supply air loss there is one percent annual energy penalty. This assumes supply side leaks are direct losses to the outside and are not recaptured back to the house. This could be adjusted downward to reflect regain of usable energy to the house from duct leaks. For example, during the winter some of the energy lost from supply leaks in a crawlspace will probably be regained back to the house (sometimes 1/2 or more may be regained). More information provided in “Appendix E Estimating HVAC System Loss From Duct Airtightness Measurements” from Energy Conservatory Blower Door Manual.

<sup>187</sup> Assumes 50% of leaks are in supply ducts.

<sup>188</sup> Assumes that for each percent of return air loss there is a half percent annual energy penalty. Note that this assumes that return leaks contribute less to energy losses than do supply leaks. This value could be adjusted upward if there was reason to suspect that the return leaks contribute significantly more energy loss than “average” (e.g., pulling return air from a super-heated attic), or can be adjusted downward to represent significantly less energy loss (e.g., pulling return air from a moderate temperature crawl space). More information provided in “Appendix E Estimating HVAC System Loss From Duct Airtightness Measurements” from Energy Conservatory Blower Door Manual.

<sup>189</sup> Assumes 50% of leaks are in return ducts.

- 12,000 = Converts Btu/H capacity to tons
- 400 = Conversion of Capacity to CFM (400CFM / ton)<sup>190</sup>
- EFLHcool = Equivalent Full Load Cooling Hours
- = Dependent on location<sup>191</sup>:

| Climate Region (City based upon) | EFLHcool (Hours) |
|----------------------------------|------------------|
| North East (Fort Madison, IA)    | 642              |
| North West (Lincoln, NE)         | 628              |
| South East (Cape Girardeau, MO)  | 778              |
| South West (Kaiser, MO)          | 719              |
| St Louis, MO                     | 869              |
| Kansas City, MO                  | 738              |
| Average/Unknown (Knob Noster)    | 684              |

- 1000 = Converts Btu to kBtu
- SEER = Efficiency in SEER of Air Conditioning equipment
- = Actual - If not available, use<sup>192</sup>:

| Equipment Type | Age of Equipment | SEER Estimate |
|----------------|------------------|---------------|
| Central AC     | Before 2006      | 10            |
|                | After 2006       | 13            |
| Heat Pump      | Before 2006      | 10            |
|                | 2006-2014        | 13            |
|                | 2015 on          | 14            |

- CapacityHeat = Heating output capacity (Btu/hr) of electric heat
- = Actual
- EFLHheat = Equivalent Full Load Heating Hours
- = Dependent on location<sup>193</sup>:

<sup>190</sup> This conversion is an industry rule of thumb; e.g., see <http://www.hvacsalesandsupply.com/Linked%20Documents/Tech%20Tips/61-Why%20400%20CFM%20per%20ton.pdf>

<sup>191</sup> Based on Full Load Hour assumptions (for St Louis and Kansas City) taken from the ENERGY STAR® calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 28.5% based on the evaluation results in Ameren territory suggesting an appropriate EFLH of 869. The other climate region values are calculated using the relative Climate Normals Cooling Degree Day ratios (at 65F set point).

<sup>192</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

<sup>193</sup> Based on Full Load Hour assumptions (for St Louis and Kansas City) taken from the ENERGY STAR® calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)). The other climate region values are calculated using the relative Climate Normals HDD data with a base temp ratio of 60°F. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. The calculations made in this measure have been based on HDD60. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.



| Climate Region (City based upon) | EFLHheat (Hours) |
|----------------------------------|------------------|
| North East (Fort Madison, IA)    | 2459             |
| North West (Lincoln, NE)         | 2695             |
| South East (Cape Girardeau, MO)  | 1851             |
| South West (Kaiser, MO)          | 1957             |
| St Louis, MO                     | 2009             |
| Kansas City, MO                  | 2149             |
| Average/Unknown (Knob Noster)    | 2218             |

COP = Efficiency in COP of Heating equipment  
 = Actual - If not available, use<sup>194</sup>:

| System Type | Age of Equipment | HSPF Estimate | COP (Effective COP Estimate) (HSPF/3.412)*0.85 |
|-------------|------------------|---------------|--|
| Heat Pump   | Before 2006      | 6.8           | 1.7  |
|             | 2006 - 2014      | 7.7           | 1.92   |
|             | 2015 on          | 8.2           | 2.04   |
| Resistance  | N/A              | N/A           | 1  |

3412 = Converts Btu to kWh  
 ΔTherms = Therm savings as calculated in Natural Gas Savings  
 F<sub>e</sub> = Furnace Fan energy consumption as a percentage of annual fuel consumption  
 = 3.14%<sup>195</sup>  
 29.3 = kWh per therm

Methodology 2: Duct Blaster Testing

$$\Delta kWh = \Delta kWh_{Cooling} + \Delta kWh_{Heating}$$

$$\Delta kWh_{Cooling} = \frac{\frac{Pre\_CFM25 - Post\_CFM25}{CapacityCool/12000 * 400} * EFLH_{cool} * CapacityCool}{1000 * SEER}$$

<sup>194</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.

<sup>195</sup> F<sub>e</sub> is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy (E<sub>f</sub> in MMBtu/yr) and E<sub>ae</sub> (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2% F<sub>e</sub>.

$$\Delta kWh_{Heating_{Electric}} = \frac{Pre\_CFM25 - Post\_CFM25}{CapacityCool/12000 * 400} * EFLH_{heat} * CapacityHeat$$

$$\Delta kWh_{Heating_{Gas}} = (\Delta Therms * Fe * 29.3)$$

Where:

- Pre\_CFM25 = Duct leakage in CFM25 as measured by duct blaster test before sealing
- Post\_CFM25 = Duct leakage in CFM25 as measured by duct blaster test after sealing
- All other variables as provided above

Methodology 3: Deemed Savings<sup>196</sup>

$$\Delta kWh = \Delta kWh_{cooling} + \Delta kWh_{Heating}$$

$$\Delta kWh_{cooling} = CoolSavingsPerUnit * Duct_{Length}$$

$$\Delta kWh_{Heating_{Electric}} = HeatSavingsPerUnit * Duct_{Length}$$

$$\Delta kWh_{Heating_{Gas}} = (\Delta Therms * Fe * 29.3)$$

Where:

CoolSavingsPerUnit = Annual cooling savings per linear foot of duct

| Building Type | HVAC System       | CoolSavingsPerUnit (kWh/ft) |
|---------------|-------------------|-----------------------------|
| Multifamily   | Cool Central      | 0.70                        |
| Single-family | Cool Central      | 0.81                        |
| Multifamily   | Heat Pump—Cooling | 0.70                        |
| Single-family | Heat Pump—Cooling | 0.81                        |

Duct<sub>Length</sub> = Linear foot of duct  
 = Actual

HeatSavingsPerUnit = Annual heating savings per linear foot of duct

| Building Type | HVAC System         | HeatSavingsPerUnit (kWh/ft) |
|---------------|---------------------|-----------------------------|
| Manufactured  | Heat Pump—Heating   | 5.06                        |
| Multifamily   | Heat Pump - Heating | 3.41                        |
| Single-family | Heat Pump— Heating  | 4.11                        |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{cooling} * CF$$

Where:

<sup>196</sup> Savings per unit are based upon analysis performed by Cadmus for the 2011 IA Joint Assessment of Potential. It was based on 10% savings in system efficiency. This would represent savings from homes with significant duct work outside of the thermal envelope. With no performance testing or verification, a deemed savings value should be very conservative and therefore the values provided in this section represent half of the savings – or 5% improvement. These values are provided as a conservative deemed estimate for Missouri, while encouraging the use of performance testing and verification for determination of more accurate savings estimates.

$kWh_{cooling}$  = Electric energy savings for cooling, calculated above  
 CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0009474181<sup>197</sup>

**NATURAL GAS SAVINGS**

For homes with Natural Gas Heating:

Methodology 1: Modified Blower Door Subtraction

$$\Delta Therm = \frac{\frac{\Delta CFM25_{DL}}{CapacityHeat * 0.0136} * EFLHheat * CapacityHeat * \frac{\eta_{Equipment}}{\eta_{System}}}{100,000}$$

Where:

$\Delta CFM25_{DL}$  = Duct leakage reduction in CFM25  
 = As calculated in Methodology 1 under electric savings  
 CapacityHeat = Heating input capacity (Btu/hr)  
 = Actual  
 0.0125 = Conversion of Capacity to CFM (0.0125CFM / Btu/hr)<sup>198</sup>  
 $\eta_{Equipment}$  = Heating Equipment Efficiency  
 = Actual<sup>199</sup> - If not available, use 83.5%<sup>200</sup>  
 $\eta_{System}$  = Pre duct sealing Heating System Efficiency (Equipment Efficiency \* Pre Distribution Efficiency)<sup>201</sup>  
 = Actual - If not available use 71.0%<sup>202</sup>

---

<sup>197</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Residential Cooling. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

<sup>198</sup> Based on Natural Draft Furnaces requiring 100 CFM per 10,000 Btu, Induced Draft Furnaces requiring 130CFM per 10,000Btu and Condensing Furnaces requiring 150 CFM per 10,000 Btu (rule of thumb from [http://contractingbusiness.com/enewsletters/cb\\_imp\\_43580/](http://contractingbusiness.com/enewsletters/cb_imp_43580/)). Data provided by GAMA during the federal rule-making process for furnace efficiency standards, suggested that in 2000, 29% of furnaces purchased in Missouri were condensing units. Therefore a weighted average required airflow rate is calculated assuming a 50:50 split of natural v induced draft non-condensing furnaces, as 125 per 10,000Btu or 0.0125/Btu.

<sup>199</sup> The Equipment Efficiency can be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test.

If there is more than one heating system, the weighted (by consumption) average efficiency should be used. If the heating system or distribution is being upgraded within a package of measures together with the insulation upgrade, the new average heating system efficiency should be used.

<sup>200</sup> In 2000, 29% of furnaces purchased in Missouri were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment - see Furnace Penetration.xls). Furnaces tend to last up to 20 years and so units purchased 16 years ago provide a reasonable proxy for the current mix of furnaces in the state. Assuming typical efficiencies for condensing and non-condensing furnaces and duct losses, the average heating system efficiency is estimated as follows: (0.29\*0.92) + (0.71\*0.8) = 0.835.

<sup>201</sup> The Distribution Efficiency can be estimated via a visual inspection and by referring to a look-up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

<sup>202</sup> Estimated as follows: 0.835 \* (1-0.15) = 0.710.

100,000 = Converts Btu to therms

Methodology 2: Duct Blaster Testing

$$\Delta Therms = \frac{Pre\_CFM25 - Post\_CFM25}{CapacityHeat * 0.0136} * EFLH_{gasheat} * CapacityHeat * \frac{\eta_{Equipment}}{\eta_{System}}$$

Where:

All variables as provided above

Methodology 3: Deemed Savings<sup>203</sup>

$$\Delta Therms = HeatSavingsPerUnit * Duct_{Length}$$

Where:

HeatSavingsPerUnit = Annual heating savings per linear foot of duct

| Building Type | HVAC System          | HeatSavingsPerUnit (Therms/ft) |
|---------------|----------------------|--------------------------------|
| Multifamily   | Heat Central Furnace | 0.19                           |
| Single-family | Heat Central Furnace | 0.21                           |

Duct<sub>Length</sub> = Linear foot of duct  
 = Actual

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>203</sup> Savings per unit are based upon analysis performed by Cadmus for the 2011 Joint Assessment of Potential. It was based on 10% savings in system efficiency. This would represent savings from homes with significant duct work outside of the thermal envelope. With no performance testing or verification, a deemed savings value should be very conservative and therefore the values provided in this section represent half of the savings – or 5% improvement. These values are provided as a conservative deemed estimate for Missouri, while encouraging the use of performance testing and verification for determination of more accurate savings estimates.

### 3.3.4 Furnace

#### DESCRIPTION

High-efficiency gas furnaces achieve savings through the use of a sealed, super insulated combustion chamber, more efficient burners, and multiple heat exchangers that remove a significant portion of the waste heat from the flue gasses. Because multiple heat exchangers are used to remove waste heat from the escaping flue gasses, most of the flue gasses condense and must be drained.

This measure was developed to be applicable to the following program type: TOS, NC, EREP:

a) Time of Sale or New Construction:

The installation of a new, residential sized (<225,000 Btu/hr), high-efficiency gas furnace in a residential location. This could relate to the replacement of an existing unit at the end of its useful life, or the installation of a new system in a new home.

b) Early Replacement:

The early removal of an existing, functional furnace from service, prior to its natural end of life, and replacement with a new, residential sized (<225,000 Btu/hr), high-efficiency, gas furnace in a residential location. Savings are based on the difference between the existing unit and efficient unit's consumption during the remaining life of the existing unit, and between the new baseline unit and efficient unit's consumption for the remainder of the measure life.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure, the installed equipment must be a new, residential sized (<225,000 Btu/hr) gas furnace with an annual fuel utilization efficiency (AFUE) rating that meets the minimum standards according to utility program requirements.

#### DEFINITION OF BASELINE EQUIPMENT

Time of Sale or New Construction: The baseline equipment is a new residential sized (<225,000 Btu/hr) gas furnace with an AFUE rating that meets minimum federal energy efficiency standards.

Early Replacement: The baseline is the existing furnace, for the remaining useful life of the unit. For the remainder of the measure life, the baseline is a new furnace with an AFUE rating that meets minimum federal energy efficiency standards.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

Time of Sale or New Construction: The expected measure life is assumed to be 19 years.<sup>204</sup>

Early Replacement: The remaining life of the existing furnace is assumed to be 6 years.<sup>205</sup>

---

<sup>204</sup> Average of 15-year lifetime from Residential Heating and Cooling Systems Initiative Description. Consortium for Energy Efficiency, May 28, 2015 and 23-year lifetime from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Commercial Warm Air Furnaces. U.S. Department of Energy, December 15, 2015.

<sup>205</sup> Assumed to be approximately one third of effective useful life.

**DEEMED MEASURE COST**

The incremental cost for this measure depends on furnace efficiency, as listed in the table below.<sup>206</sup>

| Furnace Capacity | Efficiency | Incremental Equipment Cost (Per Unit) | Incremental Total Installed Cost (Per Unit) |
|------------------|------------|---------------------------------------|---|
| <225,000 Btu/hr  | 90% AFUE   | \$163.16                              | \$477.93                                    |
|                  | 92% AFUE   | \$179.19                              | \$493.96                                    |
|                  | 95% AFUE   | \$313.45                              | \$628.22                                    |
|                  | 98% AFUE   | \$505.76                              | \$820.53                                    |

**LOADSHAPE**

Heating RES

---



---

**Algorithm**

---



---

**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS ENERGY SAVINGS**

Time of Sale or New Construction:

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{AFUE_{EE} - AFUE_{Base}}{AFUE_{Base}} \right)}{100,000}$$

Early Replacement:

ΔTherms for remaining life of existing unit (first 6 years):

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{AFUE_{EE} - AFUE_{Exist}}{AFUE_{Exist}} \right)}{100,000}$$

ΔTherms for remaining measure life (next 13 years):

$$\Delta Therms = \frac{EFLH * Capacity * \left( \frac{AFUE_{EE} - AFUE_{Base}}{AFUE_{Base}} \right)}{100,000}$$

Where:

---

<sup>206</sup> For furnaces with input <225,000 Btu/hr, incremental costs are from Technical Support Document: Energy Efficiency Program for Consumer Products and Commercial and Industrial Equipment: Residential Furnaces. U.S. Department of Energy, February 10, 2015.

EFLH = Equivalent full load hours for heating  
 = Dependent on location<sup>207</sup>:

| Climate Region (City based upon) | EFLH(Hours) |
|----------------------------------|-------------|
| North East (Fort Madison, IA)    | 2459        |
| North West (Lincoln, NE)         | 2695        |
| South East (Cape Girardeau, MO)  | 1851        |
| South West (Kaiser, MO)          | 1957        |
| St Louis, MO                     | 2009        |
| Kansas City, MO                  | 2149        |
| Average/Unknown (Knob Noster)    | 2218        |

Capacity = Nominal heating input capacity (Btu/hr) of efficient furnace  
 = Actual

AFUE<sub>EE</sub> = Efficiency rating of high efficiency furnace  
 = Actual

AFUE<sub>Base</sub> = Efficiency rating of baseline furnace  
 = 80% AFUE<sup>208</sup>

AFUE<sub>Exist</sub> = Efficiency rating of existing furnace  
 = Use actual AFUE rating where it is possible to measure or reasonably estimate.  
 If unknown, assume 64.4 AFUE%<sup>209</sup>

100,000 = Factor to convert Btus to therms

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>207</sup> Based on Full Load Hour assumptions (for St Louis and Kansas City) taken from the ENERGY STAR® calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)). The other climate region values are calculated using the relative Climate Normals HDD data with a base temp ratio of 60°F. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. The calculations made in this measure have been based on HDD60. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.

<sup>208</sup> Federal standard for furnaces <225,000 Btu/hr from 10 CFR 430.32.

<sup>209</sup> Average nameplate efficiencies of all Early Replacement qualifying equipment in Ameren, IL PY3-PY4 (2010-2012).

### 3.3.5 Standard Programmable Thermostat

#### DESCRIPTION

This measure characterizes the household energy savings from the installation of a new standard programmable thermostat for reduced heating energy consumption through temperature set-back during unoccupied or reduced demand times.

Energy savings are applicable at the household level; all thermostats controlling household heat should be programmable and installation of multiple programmable thermostats per home does not accrue additional savings.

If the home has a Heat Pump, a programmable thermostat specifically designed for heat pumps should be used to minimize the use of backup electric resistance heat systems.

This measure was developed to be applicable to the following program types: RF, DI.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The criteria for this measure are established by replacement of a manual-only temperature control with one that has the capability to adjust temperature setpoints according to a schedule without manual intervention.

#### DEFINITION OF BASELINE EQUIPMENT

For new thermostats the baseline is a non-programmable thermostat requiring manual intervention to change temperature set point.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected equipment life of a programmable thermostat is assumed to be 10 years<sup>210</sup>.

#### DEEMED MEASURE COST

Actual material and labor costs should be used if the implementation method allows. If unknown (e.g. through a retail program), the capital cost for the new installation is assumed to be \$70<sup>211</sup>.

#### LOADSHAPE

Cooling RES

Heating RES (use only this loadshape for gas savings)

---

---

### Algorithm

---

---

---

<sup>210</sup> Table 1, HVAC Controls, Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007. Future evaluation is strongly encouraged to inform the persistence of savings to further refine measure life assumption. As this characterization depends heavily upon a large scale but only 2-year study of the energy impacts of programmable thermostats, the longer term impacts should be assessed.

<sup>211</sup> Market prices vary significantly in this category, generally increasing with thermostat capability and sophistication. The basic functions required by this measure's eligibility criteria are available on units readily available in the market for \$30. Labor is assumed to be one hour at \$40 per hour.



**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

For central air conditioners and air source heat pumps:

$$\Delta kWh_{cool} = EFLH_{cool} * Capacity_{cooling} * \left(\frac{1}{SEER}\right) * SBdegrees * SF * EF/1000$$

For air source heat pumps there are additional heating savings:

$$\Delta kWh_{heat} = EFLH_{heat} * Capacity_{heating} * \left(\frac{1}{HSPF}\right) * SBdegrees * SF * EF/1000$$

Where:

*EFLH<sub>cool</sub>* = Full load cooling hours

=Actual or if unknown, assume

| Climate Region (City based upon) | EFLH <sub>cool</sub> (Hours) |
|----------------------------------|------------------------------|
| North East (Fort Madison, IA)    | 642                          |
| North West (Lincoln, NE)         | 628                          |
| South East (Cape Girardeau, MO)  | 778                          |
| South West (Kaiser, MO)          | 719                          |
| St Louis, MO                     | 869                          |
| Kansas City, MO                  | 738                          |
| Average/Unknown (Knob Noster)    | 684                          |

*CapacityCooling* = Cooling capacity of system in BTU/hr (1 ton = 12,000 BTU/hr)

=Actual or if unknown, assume 21,100<sup>212</sup>

| Household Type | Capacity Cool |
|----------------|---------------|
| Single-Family  | 36,000        |
| Multi-Family   | 23,400        |

*SEER* = SEER efficiency of central air conditioner or air source heat pump

| Unit Type | SEER <sup>213</sup> |
|-----------|---------------------|
| CAC       | 10                  |
| ASHP      | 10                  |

*HSPF* = Heating Season Performance Factor of system

<sup>212</sup> Ameren Missouri Community Savers Impact and Process Evaluation: Program Year 2017

<sup>213</sup> Ameren Missouri Community Savers Impact and Process Evaluation: Program Year 2017: IL-TRM (Based on minimum federal standards between 1992 and 2006)

| Unit Type           | SEER <sup>214</sup> |
|---------------------|---------------------|
| Electric Resistance | 3.41                |
| ASHP                | 7.0                 |

*FLH<sub>heat</sub>* = Full load heating hours

=Actual or if unknown, assume

| Climate Region (City based upon) | EFLH <sub>heat</sub> (Hours) |
|----------------------------------|------------------------------|
| North East (Fort Madison, IA)    | 2459                         |
| North West (Lincoln, NE)         | 2695                         |
| South East (Cape Girardeau, MO)  | 1851                         |
| South West (Kaiser, MO)          | 1957                         |
| St Louis, MO                     | 2009                         |
| Kansas City, MO                  | 2149                         |
| Average/Unknown (Knob Noster)    | 2218                         |

*CapacityHeating* = Heating capacity of system in BTU/hr (1 ton = 12,000 BTU/hr)

=Actual per unit serviced

| Unit Type           | Capacity Heating <sup>215</sup> |              |
|---------------------|---------------------------------|--------------|
|                     | Single Family                   | Multi family |
| Electric Resistance | 48,259                          | 21,000       |
| ASHP                | 58,240                          | 21,000       |
| Gas                 | 0                               | 0            |
| Unknown             | 42,250                          | 21,000       |

*SBdegrees* = weighted sum of setback degrees to comfort temperature

| =Actual per unit serviced Type | SBdegrees           |
|--------------------------------|---------------------|
| SBdegrees-cooling              | 3.67 <sup>216</sup> |
| SBdegrees-heating              | 8.0 <sup>217</sup>  |

*SF* = Savings factors from ENERGY STAR® calculator

| Type | SF <sup>218</sup> |
|------|-------------------|
|------|-------------------|

<sup>214</sup>Ameren Missouri Community Savers Impact and Process Evaluation: Program Year 2017: IL-TRM (Based on minimum federal standards between 1992 and 2006)

<sup>215</sup>Ameren Missouri Community Savers Impact and Process Evaluation: Program Year 2017: Program data

<sup>216</sup> PY2017 Site Visit Thermostat SB Data

<sup>217</sup> EnergyStar setpoints – MO TRM

<sup>218</sup> EnergyStar Calculator

|            |    |
|------------|----|
| SF-cooling | 6% |
| SF-heating | 3% |

EF = Efficiency ratio from Cadmus metering study

| Type       | SF <sup>219</sup> |
|------------|-------------------|
| EF-cooling | 18%               |
| EF-heating | 13%               |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{cooling} * CF$$

Where:

$$CF = 0.0009474181$$

N/A due to no savings from cooling during the summer peak period.

**NATURAL GAS ENERGY SAVINGS**

$$\frac{\Delta Therms}{PF} = \%FossilHeat * HeatingConsumption_{Gas} * HF * HeatingReduction * Eff_{ISR} *$$

Where:

%FossilHeat = Percentage of heating savings assumed to be Natural Gas

| Heating fuel | %FossilHeat        |
|--------------|--------------------|
| Electric     | 0%                 |
| Natural Gas  | 100%               |
| Unknown      | 65% <sup>220</sup> |

HeatingConsumption<sub>Gas</sub> = Estimate of annual household heating consumption for gas heated single-family homes<sup>221</sup>.

| Climate Region | Gas_Heating_ |
|----------------|--------------|
|----------------|--------------|

<sup>219</sup> Ameren Missouri Low Income and Process Evaluation: program year 2014, p.31

<sup>220</sup> Average (default) value of 65% gas space heating from 2009 Residential Energy Consumption Survey for Missouri. If utilities have specific evaluation results providing a more appropriate assumption for homes in a particular market or geographical area, then they should be used.

<sup>221</sup> Values in table are based on average household heating load (834 therms) for Chicago based on Illinois furnace metering study (‘Table E-1, Energy Efficiency/Demand Response Nicor Gas Plan Year 1: Research Report: Furnace Metering Study, Draft, Navigant, August 1 2013) and adjusted for Missouri climate region values using the relative Climate Normals HDD data with a base temp ratio of 60°F. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. The calculations made in this measure have been based on HDD60. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions. This load value is then divided by standard assumption of existing unit efficiency of 83.5% (estimate based on 29% of furnaces purchased in Missouri were condensing in 2000 (based on data from GAMA, provided to Department of Energy) (see ‘Thermostat\_FLH and Heat Load Calcs.xls’). The resulting values are generally supported by data provided by Laclede Gas that showed an average pre-furnace replacement consumption of 1009 therms for St Louis, and a post-replacement consumption of 909. Assuming a typical hot water consumption at 225 therms (using defaults from <http://energy.gov/eere/femp/energy-cost-calculator-electric-and-gas-water-heaters-0#output>), this indicates a heating load of 684-784 therms.

| (City based upon)               | Consumption (Therms) |
|---------------------------------|----------------------|
| North East (Fort Madison, IA)   | 863                  |
| North West (Lincoln, NE)        | 946                  |
| South East (Cape Girardeau, MO) | 649                  |
| South West (Kaiser, MO)         | 686                  |
| St Louis, MO                    | 680                  |
| Kansas City, MO                 | 783                  |
| Average/Unknown (Knob Noster)   | 778                  |

Other variables as provided above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

### 3.3.6 Blower Motor

#### DESCRIPTION

A new furnace with a brushless permanent magnet (BPM) blower motor is installed instead of a new furnace with a lower efficiency motor. This measure characterizes only the electric savings associated with the fan and could be coupled with gas savings associated with a more efficient furnace. Savings decrease sharply with static pressure so duct improvements, and clean, low pressure drop filters can maximize savings. Savings improve when the blower is used for cooling as well and when it is used for continuous ventilation, but only if the non-BPM motor would have been used for continuous ventilation too. If the resident runs the BPM blower continuously because it is a more efficient motor and would not run a non-BPM motor that way, savings are near zero and possibly negative. This characterization uses a 2009 Focus on Energy study of BPM blower motor savings in Wisconsin, which accounted for the effects of this behavioral impact.

This measure was developed to be applicable to the following program types: TOS, NC, EREP.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

A furnace with a brushless permanent magnet (BPM) blower motor, also known by the trademark ECM, BLDC, and other names.

#### DEFINITION OF BASELINE EQUIPMENT

A furnace with a non-BPM blower motor.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 20 years.<sup>222</sup>

#### DEEMED MEASURE COST

The capital cost for this measure is assumed to be:

| Incremental Cost (\$)   |                   |
|-------------------------|-------------------|
| \$97 <sup>223</sup>     | Time of Sale      |
| \$119.21 <sup>224</sup> | Early Replacement |

#### LOADSHAPE

HVAC RES

<sup>222</sup> Consistent with assumed life of a new gas furnace. Table 8.3.3 The Technical support documents for federal residential appliance standards: [http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/pdfs/fb\\_fr\\_tsd/chapter\\_8.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/residential/pdfs/fb_fr_tsd/chapter_8.pdf)

<sup>223</sup> Adapted from Tables 8.2.3 and 8.2.13 in

[http://www1.eere.energy.gov/buildings/appliance\\_standards/residential/pdfs/hvac\\_ch\\_08\\_lcc\\_2011-06-24.pdf](http://www1.eere.energy.gov/buildings/appliance_standards/residential/pdfs/hvac_ch_08_lcc_2011-06-24.pdf)

<sup>224</sup> This represents the delta between a future \$475 installation cost (6 years @ .0595 rate) & the NPV of that \$475. Minnesota TRM, [https://www.energy.gov/sites/prod/files/2014/02/f7/case\\_study\\_variablespeed\\_furnacemotor.pdf](https://www.energy.gov/sites/prod/files/2014/02/f7/case_study_variablespeed_furnacemotor.pdf), <https://energy.mo.gov/sites/energy/files/evaluation-of-retrofit-variable-speed-furnace-fan-motors.pdf>

Heating RES (only use this loadshape for gas savings)

---



---

**Algorithm**

---



---

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh_{Heating Mode} = (1 - \% \text{ with New ASHP}) \times \left( 400 \frac{kWh}{year} \times \frac{Heating EFLH}{Wisconsin Heating EFLH} \right) * HF$$

$$\Delta kWh_{Cooling Mode} = (1 - \% \text{ with New Central Cooling}) \times \left( 70 \frac{kWh}{year} \times \frac{Cooling EFLH}{Wisconsin Cooling EFLH} \right) * HF$$

$$\Delta kWh_{Auto Circulation} = \left( 25 \frac{kWh}{year} \times \frac{Cooling EFLH}{Wisconsin Cooling EFLH} + 2960 \frac{kWh}{year} \times 10\% - 30 \frac{kWh}{year} \right) * HF$$

$$\Delta kWh_{Continuous Circulation} = \left( 25 \frac{kWh}{year} \times \frac{Cooling EFLH}{Wisconsin Cooling EFLH} + 2960 \frac{kWh}{year} - 30 \frac{kWh}{year} \right) * HF$$

Where:

| Parameter                              | Value    |
|--|----------|
| Wisconsin Cooling Savings kWh/year     | 70.00    |
| Cooling Savings All Systems            | 25.00    |
| Wisconsin Cooling EFLH                 | 542.50   |
| Wisconsin Heating Savings kWh/year     | 400.00   |
| Wisconsin Heating EFLH                 | 2,545.25 |
| Wisconsin Circulation Savings kWh/year | 2,960.00 |
| % of Circulation Used                  | 10%      |
| Standby losses                         | 30       |
| Missouri Average Heating EFLH          | 2,218    |
| Missouri Average Cooling EFLH          | 684      |
| % with New Central Cooling             | 0.79     |
| % with New ASHP                        | 0.16     |

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh * CF$$

Where:

$$CF = \text{Summer peak coincidence demand (kW) to annual energy (kWh) factor}$$

$$= 0.0004660805$$

**NATURAL GAS SAVINGS**

$$\Delta\text{therms}^{225} = - \text{Heating Savings} * 0.03412 / \text{AFUE}$$

Where:

0.03412 = Converts kWh to therms

AFUE = Efficiency of the Furnace

= Actual. If unknown assume 95%<sup>226</sup> if in new furnace or 64.4 AFUE%<sup>227</sup> if in existing furnace

Using defaults:

$$\begin{aligned} \text{For new Furnace} &= - (430 * 0.03412) / 0.95 \\ &= - 15.4 \text{ therms} \end{aligned}$$

$$\begin{aligned} \text{For existing Furnace} &= - (430 * 0.03412) / 0.644 \\ &= - 22.8 \text{ therms} \end{aligned}$$

HF = Household factor, to adjust heating consumption for non-single-family households.

| Household Type | HF                 |
|----------------|--------------------|
| Single-Family  | 100%               |
| Multi-Family   | 65% <sup>228</sup> |

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>225</sup> The blower fan is in the heating duct so all, or very nearly all, of its waste heat is delivered to the conditioned space. Negative value since this measure will increase the heating load due to reduced waste heat.

<sup>226</sup> Minimum efficiency rating from ENERGY STAR® Furnace Specification v4.0, effective February 1, 2013.

<sup>227</sup> Average nameplate efficiencies of all Early Replacement qualifying equipment in Ameren IL PY3-PY4.

<sup>228</sup> Multifamily household heating consumption relative to single-family households is affected by overall household square footage and exposure to the exterior. This 65% reduction factor is applied to MF homes with electric resistance, based on professional judgment that average household size, and heat loads of MF households are smaller than single-family homes

### 3.3.7 Furnace Tune-Up

#### DESCRIPTION

This measure is for a natural gas Residential furnace that provides space heating. The tune-up will improve furnace performance by inspecting, cleaning and adjusting the furnace and appurtenances for correct and efficient operation. Additional savings maybe realized through a complete system tune-up.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

To qualify for this measure an approved technician must complete the tune-up requirements<sup>229</sup> listed below:

- Measure combustion efficiency using an electronic flue gas analyzer
- Check and clean blower assembly and components per manufacturer's recommendations
- Where applicable Lubricate motor and inspect and replace fan belt if required
- Inspect for gas leaks
- Clean burner per manufacturer's recommendations and adjust as needed
- Check ignition system and safety systems and clean and adjust as needed
- Check and clean heat exchanger per manufacturer's recommendations
- Inspect exhaust/flue for proper attachment and operation
- Inspect control box, wiring and controls for proper connections and performance
- Check air filter and clean or replace per manufacturer's
- Inspect duct work connected to furnace for leaks or blockages
- Measure temperature rise and adjust flow as needed
- Check for correct line and load volts/amps
- Check thermostat operation is per manufacturer's recommendations(if adjustments made, refer to 'Residential Programmable Thermostat' measure for savings estimate)
- Perform Carbon Monoxide test and adjust heating system until results are within standard industry acceptable limits

#### Verified Quality Maintenance:

This approach uses in-field measurement and interpretation of static pressures, identification and plotting of airflow, airflow measurement, temperature measurement and diagnostics, pressure measurements and duct design, and BTU measurement to ensure that existing equipment is operating according to manufacturers' published potential performance. Installed equipment operating efficiency is largely dependent on the efficiency rating of the equipment, the skill of the installation contractor, the degree to which the equipment has aged or drifted from initial settings, and the system level constraints. When one or more of these key dependencies are operating sub-optimally, the overall efficiency of the equipment is degraded. A Verified Quality Maintenance identifies sub-optimal performance and prescribes a solution during furnace tune ups.

#### DEFINITION OF BASELINE EQUIPMENT

The baseline is furnace assumed not to have had a tune-up in the past 2 years.

---

<sup>229</sup> American Standard Maintenance for Indoor Units (see 'HVAC Maintenance American Standard')



**DEEMED LIFETIME OF EFFICIENT EQUIPMENT**

The measure life for the clean and check tune up is 2 years.<sup>230</sup>

**DEEMED MEASURE COST**

The incremental cost for this measure should be the actual cost of tune up.

**DEEMED O&M COST ADJUSTMENTS**

There are no expected O&M savings associated with this measure.

**LOADSHAPE**

Heating RES

---

**Algorithms**

---

**CALCULATION OF ENERGY SAVINGS**

**ELECTRIC ENERGY SAVINGS**

N/A

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

N/A

**NATURAL GAS SAVINGS**

$$\Delta \text{Therms} = (\text{CAPInputPre} * \text{EFLH} * (1/\text{Effbefore} - 1/(\text{Effbefore} + \text{Ei})))$$

Where:

Effbefore = Efficiency of the furnace before the tune-up  
 = Actual

*Note: Contractors should select a mid-level firing rate that appropriately represents the average building operating condition over the course of the heating season and take readings at a consistent firing rate for pre and post tune-up.*

EI = Efficiency Improvement of the furnace tune-up measure  
 = Actual

EFLH = Equivalent Full Load Hours for heating

| Climate Region (City based upon) | EFLH(Hours) |
|----------------------------------|-------------|
| North East (Fort Madison, IA)    | 2459        |
| North West (Lincoln, NE)         | 2695        |
| South East (Cape Girardeau, MO)  | 1851        |
| South West (Kaiser, MO)          | 1957        |
| St Louis, MO                     | 2009        |
| Kansas City, MO                  | 2149        |
| Average/Unknown (Knob Noster)    | 2218        |

---

<sup>230</sup>Act on Energy Commercial Technical Reference Manual No. 2010-4, 9.2.3 Gas Forced-Air Furnace Tune-up.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

## 3.4 Shell End Use

### 3.4.1 Air Sealing

#### DESCRIPTION

Thermal shell air leaks are sealed through strategic use and location of air-tight materials. An estimate of savings is provided in two ways. It is highly recommended that leaks be detected and pre- and post-sealing leakage rates measured with the assistance of a blower-door by qualified/certified inspectors.<sup>231</sup> Where this occurs, an algorithm is provided to estimate the site specific savings. Where test in/test out has not occurred, a conservative deemed assumption is provided.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

Air sealing materials and diagnostic testing should meet all eligibility program qualification criteria. The initial and final tested leakage rates should be assessed in such a manner that the identified reductions can be properly discerned, particularly in situations wherein multiple building envelope measures may be implemented simultaneously.

#### DEFINITION OF BASELINE EQUIPMENT

The existing air leakage should be determined through approved and appropriate test methods using a blower door. The baseline condition of a building upon first inspection significantly affects the opportunity for cost-effective energy savings through air sealing.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 15 years.<sup>232</sup>

#### DEEMED MEASURE COST

The actual capital cost for this measure should be used.

#### LOADSHAPE

Building Shell RES

Heating RES (only use this loadshape for gas savings)

---

### Algorithm

---

#### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

#### Test In / Test Out Approach

$$\Delta kWh = \Delta kWh_{cooling} + \Delta kWh_{heating}$$

Where:

$\Delta kWh_{cooling}$  = If central cooling, reduction in annual cooling requirement due to air sealing

---

<sup>231</sup> Refer to the Energy Conservatory Blower Door Manual for more information on testing methodologies.

<sup>232</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007.

$$= \frac{\left( \frac{CFM50_{Pre} - CFM50_{Post}}{N_{cool}} \right) * 60 * 24 * CDD * DUA * 0.018 * LM}{(1000 * \eta_{Cool})}$$

CFM50<sub>Pre</sub> = Infiltration at 50 Pascals as measured by blower door before air sealing  
 = Actual<sup>233</sup>

CFM50<sub>Post</sub> = Infiltration at 50 Pascals as measured by blower door after air sealing  
 = Actual

N<sub>cool</sub> = Conversion factor from leakage at 50 Pascal to leakage at natural conditions  
 =Dependent on location and number of stories:<sup>234</sup>

| Climate Zone<br>(City based upon) | N_cool (by # of stories) |      |      |      |
|-----------------------------------|--------------------------|------|------|------|
|                                   | 1                        | 1.5  | 2    | 3    |
| North East (Fort Madison, IA)     | 43.0                     | 38.1 | 35.0 | 31.0 |
| North West (Lincoln, NE)          | 30.3                     | 26.9 | 24.6 | 21.8 |
| South East (Cape Girardeau, MO)   | 40.9                     | 36.2 | 33.2 | 29.4 |
| South West (Kaiser, MO)           | 41.2                     | 36.5 | 33.4 | 29.6 |
| St Louis, MO                      | 34.9                     | 30.9 | 28.3 | 25.1 |
| Kansas City, MO                   | 31.3                     | 27.7 | 25.4 | 22.5 |
| Average/Unknown (Knob Noster)     | 35.5                     | 31.4 | 28.8 | 25.5 |

60 \* 24 = Converts Cubic Feet per Minute to Cubic Feet per Day

CDD = Cooling Degree Days  
 = Dependent on location<sup>235</sup>:

| Climate Zone (City based upon)  | CDD 65 |
|---------------------------------|--------|
| North East (Fort Madison, IA)   | 1200   |
| North West (Lincoln, NE)        | 1174   |
| South East (Cape Girardeau, MO) | 1453   |
| South West (Kaiser, MO)         | 1344   |

<sup>233</sup> Because the pre- and post-sealing blower door test will occur on different days, there is a potential for the wind and temperature conditions on the two days to affect the readings. There are methodologies to account for these effects. For wind - first if possible, avoid testing in high wind, place blower door on downwind side, take a pre-test baseline house pressure reading and adjust your house pressure readings by subtracting the baseline reading, and use the time averaging feature on the digital gauge, etc. Corrections for air density due to temperature swings can be accounted for with Air Density Correction Factors. Refer to the Energy Conservatory Blower Door Manual for more information.

<sup>234</sup> N-factor is used to convert 50-pascal blower door air flows to natural air flows and is dependent on geographic location and # of stories. These were developed by applying the LBNL infiltration model (see LBNL paper 21040, *Exegisis of Proposed ASHRAE Standard 119: Air Leakage Performance for Detached Single-Family Residential Buildings*; Sherman, 1986; page v-vi, Appendix page 7-9) to the reported wind speeds and outdoor temperatures provided by the NRDC 30 year climate normals. For more information see Bruce Harley, CLEAResult “Infiltration Factor Calculations Methodology.doc” and calculation worksheets.

<sup>235</sup> Based on Climate Normals data with a base temperature of 65°F.

| Climate Zone (City based upon) | CDD 65 |
|--------------------------------|--------|
| St Louis, MO                   | 1646   |
| Kansas City, MO                | 1360   |
| Average/Unknown (Knob Noster)  | 1278   |

DUA = Discretionary Use Adjustment (reflects the fact that people do not always operate their AC when conditions may call for it)

= 0.75<sup>236</sup>

0.018 = Specific Heat Capacity of Air (Btu/ft<sup>3</sup>\*°F)

1000 = Converts Btu to kBtu

$\eta_{Cool}$  = Efficiency (SEER) of Air Conditioning equipment (kBtu/kWh)

= Actual (where it is possible to measure or reasonably estimate) - If unknown, assume the following<sup>237</sup>:

| Age of Equipment          | SEER Estimate |
|---------------------------|---------------|
| Before 2006               | 10            |
| 2006 - 2014               | 13            |
| Central AC After 1/1/2015 | 13            |
| Heat Pump After 1/1/2015  | 14            |

LM = Latent multiplier to account for latent cooling demand

= dependent on location:<sup>238</sup>

| Climate Zone (City based upon)  | LM  |
|---------------------------------|-----|
| North East (Fort Madison, IA)   | 5.1 |
| North West (Lincoln, NE)        | 3.5 |
| South East (Cape Girardeau, MO) | 4.5 |
| South West (Kaiser, MO)         | 3.7 |
| St Louis, MO                    | 3.0 |
| Kansas City, MO                 | 4.0 |
| Average/Unknown (Knob Noster)   | 3.2 |

$\Delta kWh_{heating}$  = If electric heat (resistance or heat pump), reduction in annual electric heating due

<sup>236</sup> This factor's source: Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p31.

<sup>237</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

<sup>238</sup> The Latent Multiplier is used to convert the sensible cooling savings calculated to a value representing sensible and latent cooling loads. The values are derived from the methodology outlined in Infiltration Factor Calculation Methodology by Bruce Harley, Senior Manager, Applied Building Science, CLEAResult 11/18/2015 and is based upon an 8760 analysis of sensible and total heat loads using hourly climate data.

to air sealing

$$= \frac{(CFM50_{Pre} - CFM50_{Post}) * 60 * 24 * HDD * 0.018}{N_{heat} (\eta_{Heat} * 3,412)}$$

N<sub>heat</sub> = Conversion factor from leakage at 50 Pascal to leakage at natural conditions  
 = Based on location and building height:<sup>239</sup>

| Climate Zone<br>(City based upon) | N <sub>heat</sub> (by # of stories) |      |      |      |
|-----------------------------------|-------------------------------------|------|------|------|
|                                   | 1                                   | 1.5  | 2    | 3    |
| North East (Fort Madison, IA)     | 24.9                                | 22.1 | 20.2 | 17.9 |
| North West (Lincoln, NE)          | 23.0                                | 20.4 | 18.7 | 16.6 |
| South East (Cape Girardeau, MO)   | 25.7                                | 22.8 | 20.9 | 18.5 |
| South West (Kaiser, MO)           | 26.6                                | 23.6 | 21.6 | 19.2 |
| St Louis, MO                      | 24.0                                | 21.3 | 19.5 | 17.3 |
| Kansas City, MO                   | 22.6                                | 20.0 | 18.4 | 16.3 |
| Average/Unknown (Knob Noster)     | 23.8                                | 21.1 | 19.3 | 17.1 |

HDD = Heating Degree Days  
 = Dependent on location:<sup>240</sup>

| Climate Zone (City based upon)  | HDD <sup>241</sup> |
|---------------------------------|--------------------|
| North East (Fort Madison, IA)   | 4475               |
| North West (Lincoln, NE)        | 4905               |
| South East (Cape Girardeau, MO) | 3368               |
| South West (Kaiser, MO)         | 3561               |
| St Louis, MO                    | 4486               |
| Kansas City, MO                 | 4059               |
| Average/Unknown (Knob Noster)   | 4037               |
| Ameren Missouri Natural Gas     | 4918               |

<sup>239</sup> N-factor is used to convert 50-pascal blower door air flows to natural air flows and is dependent on geographic location and # of stories. These were developed by applying the LBNL infiltration model (see LBNL paper 21040, *Exegisis of Proposed ASHRAE Standard 119: Air Leakage Performance for Detached Single-Family Residential Buildings*; Sherman, 1986; page v-vi, Appendix page 7-9) to the reported wind speeds and outdoor temperatures provided by the NRDC 30 year climate normals. For more information see Bruce Harley, CLEAResult “Infiltration Factor Calculations Methodology.doc” and calculation worksheets.

<sup>240</sup> The calculations made in this measure have been based on using Climate Normals data with a base temp of 60°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.

<sup>241</sup> St Louis and Ameren Missouri Natural Gas are based on HDD65, all others are based on HDD60.

$\eta_{Heat}$  = Efficiency of heating system  
 = Actual - If not available refer to default table below:<sup>242</sup>

| System Type | Age of Equipment | HSPF Estimate | $\eta_{Heat}$ (Effective COP Estimate) (HSPF/3.412)*0.85 |
|-------------|------------------|---------------|--|
| Heat Pump   | Before 2006      | 6.8           | 1.7  |
|             | 2006 - 2014      | 7.7           | 1.92   |
|             | 2015 and after   | 8.2           | 2.04   |
| Resistance  | N/A              | N/A           | 1  |

3412 = Converts Btu to kWh

Conservative Deemed Approach

$$\Delta kWh = SavingsPerUnit * SqFt$$

Where:

SavingsPerUnit = Annual savings per square foot, dependent on heating / cooling equipment<sup>243</sup>

| Building Type | HVAC System                            | SavingsPerUnit (kWh/ft) |
|---------------|--|-------------------------|
| Manufactured  | Central Air Conditioner                | 0.062                   |
| Multifamily   | Central Air Conditioner                | 0.043                   |
| Single Family | Central Air Conditioner                | 0.050                   |
| Manufactured  | Electric Furnace/Resistance Space Heat | 0.413                   |
| Multifamily   | Electric Furnace/Resistance Space Heat | 0.285                   |
| Single Family | Electric Furnace/Resistance Space Heat | 0.308                   |
| Manufactured  | Air Source Heat Pump                   | 0.391                   |
| Multifamily   | Air Source Heat Pump                   | 0.251                   |
| Single Family | Air Source Heat Pump                   | 0.308                   |
| Manufactured  | Air Source Heat Pump - Cooling         | 0.062                   |
| Multifamily   | Air Source Heat Pump - Cooling         | 0.043                   |
| Single Family | Air Source Heat Pump - Cooling         | 0.050                   |
| Manufactured  | Air Source Heat Pump - Heating         | 0.329                   |
| Multifamily   | Air Source Heat Pump - Heating         | 0.208                   |
| Single Family | Air Source Heat Pump - Heating         | 0.257                   |

<sup>242</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.

<sup>243</sup> The values in the table represent estimates of savings from a 15% improvement in air leakage. The values are half those provided by Cadmus for the Iowa Joint Assessment, based on building simulations performed. While 30% savings are certainly achievable, this represents a thorough job in both the attic and basements and could not be verified without testing. The conservative 15% estimate is more appropriate for a deemed estimate. These values should be re-evaluated if EM&V values provide support for a higher deemed estimate.

SqFt = Building conditioned square footage  
 = Actual

Additional Fan savings

$\Delta kWh_{heating}$  = If gas furnace heat, kWh savings for reduction in fan run time  
 =  $\Delta Therms * F_e * 29.3$

$F_e$  = Furnace Fan energy consumption as a percentage of annual fuel consumption  
 = 3.14%<sup>244</sup>

29.3 = kWh per therm

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{cooling} * CF$$

Where:

$\Delta kWh_{cooling}$  = As calculated above.

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0009474181<sup>245</sup>

**NATURAL GAS SAVINGS**

Test In / Test Out Approach

If Natural Gas heating:

$$\Delta Therms = \frac{(CFM50_{Pre} - CFM50_{Post})}{N_{heat}} * 60 * 24 * HDD * 0.018$$

$$(\eta_{Heat} * 100,000)$$

Where:

$N_{heat}$  = Conversion factor from leakage at 50 Pascal to leakage at natural conditions  
 = Based on location and building height:<sup>246</sup>

| Climate Zone<br>(City based upon) | N_heat (by # of stories) |      |      |      |
|-----------------------------------|--------------------------|------|------|------|
|                                   | 1                        | 1.5  | 2    | 3    |
| North East (Fort Madison, IA)     | 24.9                     | 22.1 | 20.2 | 17.9 |
| North West (Lincoln, NE)          | 23.0                     | 20.4 | 18.7 | 16.6 |

<sup>244</sup>  $F_e$  is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy ( $E_f$  in MMBtu/yr) and  $E_{ae}$  (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2%  $F_e$ . See “Furnace Fan Analysis.xlsx” for reference.

<sup>245</sup> Based on Ameren Missouri 2016 Loadshape for Residential Cooling End-Use.

<sup>246</sup> N-factor is used to convert 50-pascal blower door air flows to natural air flows and is dependent on geographic location and # of stories. These were developed by applying the LBNL infiltration model (see LBNL paper 21040, *Exegisis of Proposed ASHRAE Standard 119: Air Leakage Performance for Detached Single-Family Residential Buildings*; Sherman, 1986; page v-vi, Appendix page 7-9) to the reported wind speeds and outdoor temperatures provided by the NRDC 30 year climate normals. For more information see Bruce Harley, CLEAResult “Infiltration Factor Calculations Methodology.doc” and calculation worksheets.



| Climate Zone<br>(City based upon) | N <sub>heat</sub> (by # of stories) |      |      |      |
|-----------------------------------|-------------------------------------|------|------|------|
|                                   | 1                                   | 1.5  | 2    | 3    |
| South East (Cape Girardeau, MO)   | 25.7                                | 22.8 | 20.9 | 18.5 |
| South West (Kaiser, MO)           | 26.6                                | 23.6 | 21.6 | 19.2 |
| St Louis, MO                      | 24.0                                | 21.3 | 19.5 | 17.3 |
| Kansas City, MO                   | 22.6                                | 20.0 | 18.4 | 16.3 |
| Average/Unknown (Knob Noster)     | 23.8                                | 21.1 | 19.3 | 17.1 |

HDD = Heating Degree Days  
 = Dependent on location.<sup>247</sup>

| Climate Zone (City based upon)  | HDD <sup>248</sup> |
|---------------------------------|--------------------|
| North East (Fort Madison, IA)   | 4475               |
| North West (Lincoln, NE)        | 4905               |
| South East (Cape Girardeau, MO) | 3368               |
| South West (Kaiser, MO)         | 3561               |
| St Louis, MO                    | 4486               |
| Kansas City, MO                 | 4059               |
| Average/Unknown (Knob Noster)   | 4037               |
| Ameren Missouri Natural Gas     | 4918               |

$\eta_{Heat}$  = Efficiency of heating system  
 = Equipment efficiency \* distribution efficiency  
 = Actual<sup>249</sup> - If not available, use 71%<sup>250</sup>

<sup>247</sup> The calculations made in this measure have been based on using Climate Normals data with a base temp of 60°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.

<sup>248</sup> St. Louis and Ameren Missouri Natural Gas are based on HDD65. All others are based on HDD60.

<sup>249</sup> Ideally, the System Efficiency should be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

<sup>250</sup> This has been estimated assuming that natural gas central furnace heating is typical for Missouri residences (the predominant heating is gas furnace with 48% of Missouri homes (based on Energy Information Administration, 2009 Residential Energy Consumption Survey). In 2000, 29% of furnaces purchased in Missouri were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment - see Furnace Penetration.xls). Furnaces tend to last up to 20 years and so units purchased 16 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non-condensing furnaces and duct losses, the average heating system efficiency is estimated as follows:  $((0.29*0.92) + (0.71*0.8)) * (1-0.15) = 0.71$ .

Other factors as defined above

Conservative Deemed Approach

$$\Delta Therms = SavingsPerUnit * SqFt$$

Where:

SavingsPerUnit = Annual savings per square foot, dependent on heating / cooling equipment<sup>251</sup>

| Building Type | HVAC System | SavingsPerUnit (Therms/ft) |
|---------------|-------------|----------------------------|
| Manufactured  | Gas Boiler  | 0.022                      |
| Multifamily   | Gas Boiler  | 0.018                      |
| Single Family | Gas Boiler  | 0.016                      |
| Manufactured  | Gas Furnace | 0.017                      |
| Multifamily   | Gas Furnace | 0.012                      |
| Single Family | Gas Furnace | 0.013                      |

SqFt = Building square footage  
 = Actual

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>251</sup> The values in the table represent estimates of savings from a 15% improvement in air leakage. The values are half those provided by Cadmus for the Iowa Joint Assessment, based on building simulations performed. While 30% savings are certainly achievable, this represents a thorough job in both the attic and basements and could not be verified without testing. The conservative 15% estimate is more appropriate for a deemed estimate. These values should be re-evaluated if EM&V values provide support for a higher deemed estimate.

### 3.4.2 Ceiling Insulation

#### DESCRIPTION

This measure describes savings from adding insulation to the attic/ceiling. This measure requires a member of the implementation staff evaluating the pre- and post-project R-values and to measure surface areas. The efficiency of the heating and cooling equipment in the home should also be evaluated if possible.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The requirements for participation in the program will be defined by the utilities.

#### DEFINITION OF BASELINE EQUIPMENT

The existing condition will be evaluated by implementation staff or a participating contractor.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 25 years.<sup>252</sup>

#### DEEMED MEASURE COST

The actual installed cost for this measure should be used in screening.

#### LOADSHAPE

Cooling RES

Heating RES (only use this loadshape for gas savings)

---



---

### Algorithm

---



---

#### CALCULATION OF SAVINGS

##### ELECTRIC ENERGY SAVINGS

$$\Delta kWh = (\Delta kWh_{cooling} + \Delta kWh_{heating})$$

Where

$\Delta kWh_{cooling}$  = If central cooling, reduction in annual cooling requirement due to insulation

$$= \frac{\left( \frac{1}{R_{Old}} - \frac{1}{R_{Attic}} \right) * A_{Attic} * (1 - FramingFactor_{Attic}) * CDD * 24 * DUA}{(1000 * \eta_{Cool})}$$

$R_{Attic}$  = R-value of new attic assembly including all layers between inside air and outside air (ft<sup>2</sup>.°F.h/Btu)

$R_{Old}$  = R-value value of existing assembly and any existing insulation

---

<sup>252</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007

(Minimum of R-5 for uninsulated assemblies<sup>253</sup>)

$A_{Attic}$  = Total area of insulated ceiling/attic (ft<sup>2</sup>)

FramingFactor<sub>Attic</sub> = Adjustment to account for area of framing

= 7%<sup>254</sup>

CDD = Cooling Degree Days

= Dependent on location<sup>255</sup>:

| Climate Zone (City based upon)  | CDD 65 |
|---------------------------------|--------|
| North East (Fort Madison, IA)   | 1200   |
| North West (Lincoln, NE)        | 1174   |
| South East (Cape Girardeau, MO) | 1453   |
| South West (Kaiser, MO)         | 1344   |
| St Louis, MO                    | 1646   |
| Kansas City, MO                 | 1360   |
| Average/Unknown (Knob Noster)   | 1278   |

24 = Converts days to hours

DUA = Discretionary Use Adjustment (reflects the fact that people do not always operate their AC when conditions may call for it)

= 0.75<sup>256</sup>

1000 = Converts Btu to kBtu

$\eta_{Cool}$  = Seasonal Energy Efficiency Ratio of cooling system (kBtu/kWh)

= Actual (where it is possible to measure or reasonably estimate) - If unknown, assume the following:<sup>257</sup>

| Age of Equipment          | $\eta_{Cool}$ Estimate |
|---------------------------|------------------------|
| Before 2006               | 10                     |
| 2006 - 2014               | 13                     |
| Central AC after 1/1/2015 | 13                     |
| Heat Pump after 1/1/2015  | 14                     |

kWh\_heating = If electric heat (resistance or heat pump), reduction in annual electric heating due

<sup>253</sup> An estimate based on review of Madison Gas and Electric, Exterior Wall Insulation, R-value for no insulation in walls, and NREL's Building Energy Simulation Test for Existing Homes (BESTEST-EX).

<sup>254</sup> ASHRAE, 2001, "Characterization of Framing Factors for New Low-Rise Residential Building Envelopes (904-RP)," Table 7.1

<sup>255</sup> Based on Climate Normals data with a base temp of 65°F.

<sup>256</sup> This factor's source: Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p31.

<sup>257</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

to insulation

$$= \frac{\left(\frac{1}{R_{Old}} - \frac{1}{R_{Attic}}\right) * A_{Attic} * (1 - FramingFactor_{Attic}) * HDD * 24 * ADJ_{Attic}}{(\eta_{Heat} * 3412)}$$

HDD = Heating Degree Days  
 = Dependent on location:<sup>258</sup>

| Climate Zone (City based upon)  | HDD <sup>259</sup> |
|---------------------------------|--------------------|
| North East (Fort Madison, IA)   | 4475               |
| North West (Lincoln, NE)        | 4905               |
| South East (Cape Girardeau, MO) | 3368               |
| South West (Kaiser, MO)         | 3561               |
| St Louis, MO                    | 4486               |
| Kansas City, MO                 | 4059               |
| Average/Unknown (Knob Noster)   | 4037               |
| Ameren Missouri Natural Gas     | 4918               |

$\eta_{Heat}$  = Efficiency of heating system  
 = Actual - If not available, refer to default table below:<sup>260</sup>

| System Type | Age of Equipment | HSPF Estimate | $\eta_{Heat}$ (Effective COP Estimate) (HSPF/3.412)*0.85 |
|-------------|------------------|---------------|--|
| Heat Pump   | Before 2006      | 6.8           | 1.7  |
|             | 2006 - 2014      | 7.7           | 1.9  |
|             | 2015 and after   | 8.2           | 2.0  |
| Resistance  | N/A              | N/A           | 1.0  |

3412 = Converts Btu to kWh

$ADJ_{Attic}$  = Adjustment for attic insulation to account for prescriptive engineering algorithms consistently overclaiming savings.

<sup>258</sup> The calculations made in this measure have been based on using Climate Normals data with a <sup>base</sup> temp of 60°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions

<sup>259</sup> St. Louis and Ameren Missouri Natural Gas are based on HDD65. All others are based on HDD60.

<sup>260</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.

$$= 74\%^{261}$$

$\Delta kWh_{\text{heating}}$  = If gas *furnace* heat, kWh savings for reduction in fan run time

$$= \Delta \text{Therms} * F_e * 29.3$$

Where:

$F_e$  = Furnace Fan energy consumption as a percentage of annual fuel consumption

$$= 3.14\%^{262}$$

29.3 = kWh per therm

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{\text{cooling}} * CF$$

Where:

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor

$$= 0.0009474181^{263}$$

**NATURAL GAS SAVINGS**

$\Delta$ Therms (if Natural Gas heating)

$$= \frac{\left( \frac{1}{R_{\text{old}}} - \frac{1}{R_{\text{Attic}}} \right) * A_{\text{Attic}} * (1 - \text{FramingFactor}_{\text{Attic}}) * HDD * 24 * ADJ_{\text{Attic}}}{(\eta_{\text{Heat}} * 100,000)}$$

Where:

HDD = Heating Degree Days

= Dependent on location:<sup>264</sup>

| Climate Zone (City based upon) | HDD <sup>265</sup> |
|--------------------------------|--------------------|
| North East (Fort Madison, IA)  | 4475               |
| North West (Lincoln, NE)       | 4905               |
| South East (Cape Girardeau,    | 3368               |

<sup>261</sup> Based upon comparing algorithm derived savings estimate and evaluated bill analysis estimate in the following 2012 Massachusetts report: “Home Energy Services Impact Evaluation”, August 2012. See “Insulation ADJ calculations.xls” for details or calculation.

<sup>262</sup>  $F_e$  is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy ( $E_f$  in MMBtu/yr) and  $E_{ae}$  (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2%  $F_e$ . See “Furnace Fan Analysis.xlsx” for reference.

<sup>263</sup> Based on Ameren Missouri 2016 Loadshape for Residential Cooling End-Use.

<sup>264</sup> The calculations made in this measure have been based on using Climate Normals data with a base temp of 60°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.

<sup>265</sup> St. Louis and Ameren Missouri Natural Gas are based on HDD65. All others are based on HDD60.

| Climate Zone (City based upon) | HDD <sup>265</sup> |
|--------------------------------|--------------------|
| MO)                            |                    |
| South West (Kaiser, MO)        | 3561               |
| St Louis, MO                   | 4486               |
| Kansas City, MO                | 4059               |
| Average/Unknown (Knob Noster)  | 4037               |
| Ameren Missouri Natural Gas    | 4918               |

$\eta_{Heat}$  = Efficiency of heating system  
 = Equipment efficiency \* distribution efficiency  
 = Actual.<sup>266</sup> If unknown assume 71%<sup>267</sup>.

100,000 = Converts Btu to Therms

Other factors as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>266</sup> Ideally, the System Efficiency should be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

<sup>267</sup> This has been estimated assuming that natural gas central furnace heating is typical for Missouri residences (the predominant heating is gas furnace with 48% of Missouri homes based on Energy Information Administration, 2009 Residential Energy Consumption Survey). In 2000, 29% of furnaces purchased in Missouri were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment - see Furnace Penetration.xls). Furnaces tend to last up to 20 years and so units purchased 16 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non-condensing furnaces and duct losses, the average heating system efficiency is estimated as follows:  $((0.29*0.92) + (0.71*0.8)) * (1-0.15) = 0.71$ .

### 3.4.3 Duct Insulation

#### DESCRIPTION

This measure describes evaluating the savings associated with performing duct insulation on the distribution system of homes with central cooling and/or a ducted heating system. While insulating ducts in conditioned space can help with control and comfort, energy savings are largely limited to insulating ducts in unconditioned space where the heat loss is to outside the thermal envelope. Therefore, for this measure to be applicable, at least 30% of ducts should be within unconditioned space (e.g., attic with floor insulation, vented crawlspace, unheated garages. Basements should be considered conditioned space).

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The efficient condition is insulated duct work throughout the unconditioned space in the home.

#### DEFINITION OF BASELINE EQUIPMENT

The baseline condition is existing duct work with at least 30% of the ducts within the unconditioned space in the home.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 20 years.<sup>268</sup>

#### DEEMED MEASURE COST

The actual duct insulation measure cost should be used.

#### LOADSHAPE

##### HVAC RES

Heating RES (only use this loadshape for gas savings)

---

### Algorithm

---

#### CALCULATION OF SAVINGS

##### ELECTRIC ENERGY SAVINGS

Electric energy savings is calculated as the sum of energy saved when cooling the home and energy saved when heating the home.

$$\Delta kWh = \Delta kWh_{Cooling} + \Delta kWh_{Heating}$$

If central cooling, the electric energy saved in annual cooling due to the added insulation is

$$\Delta kWh_{Cooling} = \frac{\left( \frac{1}{R_{existing}} - \frac{1}{R_{new}} \right) * Area * EFLH_{cool} * \Delta T_{AVG,cooling}}{(1,000 * SEER)}$$

---

<sup>268</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, June 2007.



Where:

$R_{existing}$  = Duct heat loss coefficient with existing insulation ((hr-<sup>0</sup>F-ft<sup>2</sup>)/Btu)  
 = Actual

$R_{new}$  = Duct heat loss coefficient with new insulation (hr-<sup>0</sup>F-ft<sup>2</sup>)/Btu)  
 = Actual

Area = Area of the duct surface exposed to the unconditioned space that has been insulated (ft<sup>2</sup>)

EFLHcool = Equivalent Full Load Cooling Hours  
 = Dependent on location<sup>269</sup>:

| Climate Region (City based upon) | EFLHcool (Hours) |
|----------------------------------|------------------|
| North East (Fort Madison, IA)    | 642              |
| North West (Lincoln, NE)         | 628              |
| South East (Cape Girardeau, MO)  | 778              |
| South West (Kaiser, MO)          | 719              |
| St Louis, MO                     | 869              |
| Kansas City, MO                  | 738              |
| Average/Unknown (Knob Noster)    | 684              |

$\Delta T_{AVG,cooling}$  = Average temperature difference (<sup>0</sup>F) during cooling season between outdoor air temperature and assumed 60<sup>0</sup>F duct supply air temperature<sup>270</sup>

| Climate Zone (City based upon)  | $OA_{AVG,cooling}$ [ <sup>0</sup> F] <sup>271</sup> | $\Delta T_{AVG,cooling}$ [ <sup>0</sup> F] |
|---------------------------------|---|--|
| North East (Fort Madison, IA)   | 76.2  | 16.2                                       |
| North West (Lincoln, NE)        | 78.8  | 18.8                                       |
| South East (Cape Girardeau, MO) | 79.4  | 19.4                                       |
| South West (Kaiser, MO)         | 81.3  | 21.3                                       |
| St Louis, MO                    | 80.8  | 20.8                                       |
| Kansas City, MO                 | 79.0  | 19.0                                       |
| Average/Unknown (Knob Noster)   | 80.7  | 20.7                                       |

<sup>269</sup> Based on Full Load Hour assumptions (for St Louis and Kansas City) taken from the ENERGY STAR® calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)) and reduced by 28.5% based on the evaluation results in Ameren territory suggesting an appropriate EFLH of 869. The other climate region values are calculated using the relative Climate Normals Cooling Degree Day ratios (at 65F set point).

<sup>270</sup> Leaving coil air temperatures are typically about 55<sup>0</sup>F. 60<sup>0</sup>F is used as an average temperature, recognizing that some heat transfer occurs between the ductwork and the environment it passes through.

<sup>271</sup> National Solar Radiation Data Base -- 1991- 2005 Update: Typical Meteorological Year 3 [http://rredc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/by\\_state\\_and\\_city.html](http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/by_state_and_city.html) . Heating Season defined as September 17<sup>th</sup> through April 13<sup>th</sup>, cooling season defined as May 20 through August 15<sup>th</sup>. For cooling season, temperatures from 8AM to 8PM were used to establish average temperatures as this is when cooling systems are expected to be loaded.

- 1,000 = Converts Btu to kBtu
- SEER = Efficiency in SEER of air conditioning equipment
- = Actual - If not available, use:<sup>272</sup>

| Equipment Type | Age of Equipment | SEER Estimate |
|----------------|------------------|---------------|
| Central AC     | Before 2006      | 10            |
|                | After 2006       | 13            |
| Heat Pump      | Before 2006      | 10            |
|                | 2006-2014        | 13            |
|                | 2015 on          | 14            |

If the home is heated with electric heat (resistance or heat pump), the electric energy saved in annual heating due to the added insulation is:

$$\Delta kWh_{Heating_{Electric}} = \frac{\left(\frac{1}{R_{existing}} - \frac{1}{R_{new}}\right) * Area * EFLH_{heat} * \Delta T_{AVG,heating}}{(3,412 * COP)}$$

Where:

- EFLH<sub>heat</sub> = Equivalent Full Load Heating Hours
- = Dependent on location<sup>273</sup>:

| Climate Region (City based upon) | EFLH <sub>heat</sub> (Hours) |
|----------------------------------|------------------------------|
| North East (Fort Madison, IA)    | 2459                         |
| North West (Lincoln, NE)         | 2695                         |
| South East (Cape Girardeau, MO)  | 1851                         |
| South West (Kaiser, MO)          | 1957                         |
| St Louis, MO                     | 2009                         |
| Kansas City, MO                  | 2149                         |
| Average/Unknown (Knob Noster)    | 2218                         |

- $\Delta T_{AVG,heating}$  = Average temperature difference (°F) during heating season between outdoor air temperature and assumed 115°F duct supply temperature<sup>274</sup>

<sup>272</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

<sup>273</sup> Based on Full Load Hour assumptions (for St Louis and Kansas City) taken from the ENERGY STAR® calculator ([http://www.energystar.gov/ia/business/bulk\\_purchasing/bpsavings\\_calc/Calc\\_CAC.xls](http://www.energystar.gov/ia/business/bulk_purchasing/bpsavings_calc/Calc_CAC.xls)). The other climate region values are calculated using the Climate Normals Heating Degree Day ratios (at 60F set point). NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.

<sup>274</sup> Forced air supply temperatures are typically 130°F. 115°F is used as an average temperature, recognizing that some heat transfer occurs between the ductwork and the environment it passes through.

| Climate Zone<br>(City based upon) | OA <sub>AVG,heating</sub><br>[°F] <sup>275</sup> | ΔT <sub>AVG,heating</sub><br>[°F] |
|-----------------------------------|--|-----------------------------------|
| North East (Fort Madison, IA)     | 42.1   | 72.9                              |
| North West (Lincoln, NE)          | 39.0   | 76.0                              |
| South East (Cape Girardeau, MO)   | 45.7   | 69.3                              |
| South West (Kaiser, MO)           | 45.0   | 70.0                              |
| St Louis, MO                      | 43.2   | 71.8                              |
| Kansas City, MO                   | 40.3   | 74.7                              |
| Average/Unknown (Knob Noster)     | 43.4   | 71.6                              |

- 3,412 = Converts Btu to kWh
- COP = Efficiency in COP of heating equipment
- = Actual - If not available, use:<sup>276</sup>

| System Type | Age of Equipment | HSPF Estimate | COP (Effective COP Estimate)<br>(HSPF/3.412)*0.85 |
|-------------|------------------|---------------|---|
| Heat Pump   | Before 2006      | 6.8           | 1.7   |
|             | 2006 - 2014      | 7.7           | 1.92  |
|             | 2015 on          | 8.2           | 2.04  |
| Resistance  | N/A              | N/A           | 1   |

If the building is heated with a gas furnace, there will be some electric savings in heating the building attributed to extra insulation since the furnace fans will run less.

$$\Delta kWh_{Heating_{Gas}} = (\Delta Therms * Fe * 29.3)$$

Where:

- ΔTherms = Therm savings as calculated in Natural Gas Savings
- Fe = Furnace Fan energy consumption as a percentage of annual fuel consumption  
= 3.14%<sup>277</sup>
- 29.3 = Converts therms to kWh

<sup>275</sup> National Solar Radiation Data Base -- 1991- 2005 Update: Typical Meteorological Year 3 [http://rredc.nrel.gov/solar/old\\_data/nsrdb/1991-2005/tmy3/by\\_state\\_and\\_city.html](http://rredc.nrel.gov/solar/old_data/nsrdb/1991-2005/tmy3/by_state_and_city.html) . Heating Season defined as September 17<sup>th</sup> through April 13<sup>th</sup>, cooling season defined as May 20 through August 15<sup>th</sup>. For cooling season, temperatures from 8AM to 8PM were used to establish average temperatures as this is when cooling systems are expected to be loaded.

<sup>276</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.

<sup>277</sup> Fe is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy (Ef in MMBtu/yr) and Eae (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2% Fe.

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{Cooling} * CF$$

Where:

$\Delta kWh_{Cooling}$  = Electric energy savings for cooling, calculated above

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
= 0.0009474181<sup>278</sup>

**NATURAL GAS SAVINGS**

If home uses a gas heating system, the savings resulting from the insulation is calculated with the following formula.

$$\Delta \text{Therms} = \frac{\left( \frac{1}{R_{existing}} - \frac{1}{R_{new}} \right) * Area * EFLH_{heat} * \Delta T_{AVG,heating}}{(100,000 * \eta_{Heat})}$$

Where:

All factors as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>278</sup> 2016 Ameren Missouri Coincident Peak Demand Factor for Residential Cooling. See reference “Ameren Missouri 2016 Appendix E - End Use Shapes and Coincident Factors.pdf”

### 3.4.4 Floor Insulation

#### DESCRIPTION

Insulation is added to the floor above a vented crawl space that does not contain pipes or HVAC equipment. If there are pipes, HVAC, or a basement, it is desirable to keep them within the conditioned space by insulating the crawl space walls and ground. Insulating the floor separates the conditioned space above from the space below the floor, and is only acceptable when there is nothing underneath that could freeze or would operate less efficiently in an environment resembling the outdoors. Even in the case of an empty, unvented crawl space, it is still considered best practice to seal and insulate the crawl space perimeter rather than the floor. Not only is there generally less area to insulate this way, but there are also moisture control benefits. There is a “Foundation Sidewall Insulation” measure for perimeter sealing and insulation. This measure assumes the insulation is installed above an unvented crawl space and should not be used in other situations.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The requirements for participation in the program will be defined by the utilities.

#### DEFINITION OF BASELINE EQUIPMENT

The existing condition will be evaluated by implementation staff or a participating contractor and is likely to be no insulation on any surface surrounding a crawl space.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 25 years.<sup>279</sup>

#### DEEMED MEASURE COST

The actual installed cost for this measure should be used in screening.

#### LOADSHAPE

Building Shell RES

Heating RES (only use this loadshape for gas savings)

---

---

### Algorithm

---

---

#### CALCULATION OF SAVINGS

##### ELECTRIC ENERGY SAVINGS

Where available savings from shell insulation measures should be determined through a custom analysis. When that is not feasible for the program the following engineering algorithms can be used with the inclusion of an adjustment factor to de-rate the heating savings.

$$\Delta kWh = (\Delta kWh_{cooling} + \Delta kWh_{heating})$$

Where:

$\Delta kWh_{cooling}$  = If central cooling, reduction in annual cooling requirement due to insulation

---

<sup>279</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007

$$= \frac{\left( \frac{1}{R_{Old}} - \frac{1}{(R_{Added} + R_{Old})} \right) * Area * (1 - Framing Factor) * CDD * 24 * DUA}{(1000 * \eta_{Cool})}$$

- R<sub>Old</sub> = R-value value of floor before insulation, assuming 3/4” plywood subfloor and carpet with pad  
= Actual. If unknown assume 3.96<sup>280</sup>
- R<sub>Added</sub> = R-value of additional spray foam, rigid foam, or cavity insulation.
- Area = Total floor area to be insulated
- Framing Factor = Adjustment to account for area of framing  
= 12%<sup>281</sup>
- 24 = Converts hours to days
- CDD = Cooling Degree Days

| Climate Zone<br>(City based upon) | Unconditioned<br>Space |
|-----------------------------------|------------------------|
|                                   | CDD 75 <sup>282</sup>  |
| North East (Fort Madison, IA)     | 96                     |
| North West (Lincoln, NE)          | 585                    |
| South East (Cape Girardeau, MO)   | 593                    |
| South West (Kaiser, MO)           | 563                    |
| St Louis, MO                      | 762                    |
| Kansas City, MO                   | 762                    |
| Average/Unknown (Knob Noster)     | 509                    |

- DUA = Discretionary Use Adjustment (reflects the fact that people do not always operate their AC when conditions may call for it).  
= 0.75<sup>283</sup>
- 1000 = Converts Btu to kBtu
- η<sub>Cool</sub> = Seasonal Energy Efficiency Ratio of cooling system (kBtu/kWh)  
= Actual (where it is possible to measure or reasonably estimate). If unknown

<sup>280</sup> Based on 2005 ASHRAE Handbook – Fundamentals: assuming 2x8 joists, 16” OC, ¾” subfloor, ½” carpet with rubber pad, and accounting for a still air film above and below: 1/ [(0.85 cavity share of area / (0.68 + 0.94 + 1.23 + 0.68)) + (0.15 framing share / (0.68 + 7.5” \* 1.25 R/in + 0.94 + 1.23 + 0.68))] = 3.96

<sup>281</sup> ASHRAE, 2001, “Characterization of Framing Factors for New Low-Rise Residential Building Envelopes (904-RP),” Table 7.1

<sup>282</sup> The base temperature should be the outdoor temperature at which the desired indoor temperature stays constant, in balance with heat loss or gain to the outside and internal gains. Since unconditioned basements are allowed to swing in temperature, are ground coupled, and are usually cool, they have a bigger delta between the two (heating and cooling) base temperatures. 75F for cooling and 50F for heating are used based on professional judgment. Five year average cooling degree days with 75F base temp are provided from DegreeDays.net because the 30 year climate normals from NCDC are not available at base temps above 72F.

<sup>283</sup> Energy Center of Wisconsin, May 2008 metering study; “Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research,” p31.

assume the following:<sup>284</sup>

| Age of Equipment          | ηCool Estimate |
|---------------------------|----------------|
| Before 2006               | 10             |
| 2006 - 2014               | 13             |
| Central AC After 1/1/2015 | 13             |
| Heat Pump After 1/1/2015  | 14             |

ΔkWh\_heating = If electric heat (resistance or heat pump), reduction in annual electric heating due to insulation

$$= \frac{\left( \frac{1}{R_{Old}} - \frac{1}{(R_{Added} + R_{Old})} \right) * Area * (1 - Framing Factor) * HDD * 24 * ADJ_{Floor}}{(\eta_{Heat} * 3412)}$$

HDD = Heating Degree Days:

| Climate Zone<br>(City based upon) | Unconditioned Space   |
|-----------------------------------|-----------------------|
|                                   | HDD 50 <sup>285</sup> |
| North East (Fort Madison, IA)     | 2635                  |
| North West (Lincoln, NE)          | 2973                  |
| South East (Cape Girardeau, MO)   | 1747                  |
| South West (Kaiser, MO)           | 1886                  |
| St Louis, MO                      | 1911                  |
| Kansas City, MO                   | 2008                  |
| Average/Unknown (Knob Noster)     | 2259                  |

ηHeat = Efficiency of heating system

= Actual. If not available refer to default table below:<sup>286</sup>

| System Type | Age of Equipment | HSPF Estimate | ηHeat (Effective COP Estimate)<br>(HSPF/3.412)*0.85 |
|-------------|------------------|---------------|---|
| Heat Pump   | Before 2006      | 6.8           | 1.7   |
|             | 2006 - 2014      | 7.7           | 1.9   |
|             | 2015 and after   | 8.2           | 2.0   |

<sup>284</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

<sup>285</sup> The base temperature should be the outdoor temperature at which the desired indoor temperature stays constant, in balance with heat loss or gain to the outside and internal gains. Since unconditioned basements are allowed to swing in temperature, are ground coupled, and are usually cool, they have a bigger delta between the two (heating and cooling) base temperatures. 75F for cooling and 50F for heating are used based on professional judgment. National Climatic Data Center, calculated from 1981-2010 climate normals.

<sup>286</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.

| System Type | Age of Equipment | HSPF Estimate | $\eta_{Heat}$ (Effective COP Estimate) (HSPF/3.412)*0.85 |
|-------------|------------------|---------------|--|
| Resistance  | N/A              | N/A           | 1.0  |

$ADJ_{Floor}$  = Adjustment for floor insulation to account for prescriptive engineering algorithms overclaiming savings.  
 = 88%<sup>287</sup>

Other factors as defined above

$\Delta kWh_{heating}$  = If gas furnace heat, kWh savings for reduction in fan run time  
 =  $\Delta Therms * F_e * 29.3$

$F_e$  = Furnace Fan energy consumption as a percentage of annual fuel consumption  
 = 3.14%<sup>288</sup>

29.3 = kWh per therm

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{cooling} * CF$$

Where:

$CF$  = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0009474181<sup>289</sup>

**NATURAL GAS SAVINGS**

$$= \frac{\Delta Therms \text{ (if Natural Gas heating)} \left( \frac{1}{R_{Old}} - \frac{1}{(R_{Added} + R_{Old})} \right) * Area * (1 - Framing Factor) * HDD * 24 * ADJ_{Floor}}{(\eta_{Heat} * 100,000)}$$

Where

$\eta_{Heat}$  = Efficiency of heating system  
 = Equipment efficiency \* distribution efficiency

<sup>287</sup> Based upon comparing algorithm derived savings estimate and evaluated bill analysis estimate in the following 2012 Massachusetts report: “Home Energy Services Impact Evaluation”, August 2012. See “Insulation ADJ calculations.xls” for details or calculation. Note that basement wall is used as a proxy for crawlspace ceiling.

<sup>288</sup>  $F_e$  is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy (Ef in MMBtu/yr) and Eae (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2%  $F_e$ . See “Programmable Thermostats Furnace Fan Analysis.xlsx” for reference.

<sup>289</sup> Based on Ameren Missouri 2016 Loadshape for Residential Cooling End-Use.



100,000 = Actual<sup>290</sup> - If not available, use 71%<sup>291</sup>  
= Converts Btu to Therms  
Other factors as defined above.

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>290</sup> Ideally, the System Efficiency should be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

<sup>291</sup> This has been estimated assuming that natural gas central furnace heating is typical for Missouri residences (the predominant heating is gas furnace with 48% of Missouri homes (based on Energy Information Administration, 2009 Residential Energy Consumption Survey). In 2000, 29% of furnaces purchased in Missouri were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment - see Furnace Penetration.xls). Furnaces tend to last up to 20 years and so units purchased 16 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non-condensing furnaces and duct losses, the average heating system efficiency is estimated as follows:  $((0.29*0.92) + (0.71*0.8)) * (1-0.15) = 0.71$ .

### 3.4.5 Foundation Sidewall Insulation

#### DESCRIPTION

Insulation is added to a basement or crawl space. Insulation added above ground in conditioned space is modeled the same as wall insulation. Below ground insulation is adjusted with an approximation of the thermal resistance of the ground. Insulation in unconditioned spaces is modeled by reducing the degree days to reflect the smaller but non-zero contribution to heating and cooling load. Cooling savings only consider above grade insulation, as below grade has little temperature difference during the cooling season.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The requirements for participation in the program will be defined by the utilities.

#### DEFINITION OF BASELINE EQUIPMENT

The existing condition will be evaluated by implementation staff or a participating contractor and is likely to be no basement wall or ceiling insulation.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 25 years.<sup>292</sup>

#### DEEMED MEASURE COST

The actual installed cost for this measure should be used in screening.

#### LOADSHAPE

Building Shell RES

Heating RES (only use this loadshape for gas savings)

---

---

#### Algorithm

---

---

---

<sup>292</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007

**CALCULATION OF SAVINGS**

**ELECTRIC ENERGY SAVINGS**

Where available savings from shell insulation measures should be determined through a custom analysis. When that is not feasible for the program the following engineering algorithms can be used with the inclusion of an adjustment factor to de-rate the heating savings.

$$\Delta kWh = (\Delta kWh_{cooling} + \Delta kWh_{heating})$$

Where:

$\Delta kWh_{cooling}$  = If central cooling, reduction in annual cooling requirement due to Insulation

$$= \frac{\left( \frac{1}{R_{OldAG}} - \frac{1}{(R_{Added} + R_{OldAG})} \right) * L_{BWT} * H_{BWAG} * (1 - FF) * CDD * 24 * DUA}{(1000 * \eta_{Cool})}$$

- $R_{Added}$  = R-value of additional spray foam, rigid foam, or cavity insulation.
- $R_{OldAG}$  = R-value value of foundation wall above grade.  
= Actual, if unknown assume 1.0<sup>293</sup>
- $L_{BWT}$  = Length (Basement Wall Total) of basement wall around the entire insulated perimeter (ft)
- $H_{BWAG}$  = Height (Basement Wall Above Grade) of insulated basement wall above grade (ft)
- $FF$  = Framing Factor, an adjustment to account for area of framing when cavity insulation is used  
= 0% if Spray Foam or External Rigid Foam  
= 25% if studs and cavity insulation<sup>294</sup>
- 24 = Converts hours to days
- $CDD$  = Cooling Degree Days  
= Dependent on location and whether basement is conditioned:

| Climate Zone<br>(City based upon) | Conditioned<br>Space | Unconditioned<br>Space |
|-----------------------------------|----------------------|------------------------|
|-----------------------------------|----------------------|------------------------|

<sup>293</sup> ORNL Builders Foundation Handbook, crawl space data from Table 5-5: Initial Effective R-values for Uninsulated Foundation System and Adjacent Soil, 1991, [http://www.ornl.gov/sci/roofs+walls/foundation/ORNL\\_CON-295.pdf](http://www.ornl.gov/sci/roofs+walls/foundation/ORNL_CON-295.pdf)

<sup>294</sup> ASHRAE, 2001, “Characterization of Framing Factors for New Low-Rise Residential Building Envelopes (904-RP),” Table 7.1

|                                 | CDD 65 <sup>295</sup> | CDD 75 <sup>296</sup> |
|---------------------------------|-----------------------|-----------------------|
| North East (Fort Madison, IA)   | 1200                  | 585                   |
| North West (Lincoln, NE)        | 1174                  | 593                   |
| South East (Cape Girardeau, MO) | 1453                  | 563                   |
| South West (Kaiser, MO)         | 1344                  | 814                   |
| St Louis, MO                    | 1646                  | 762                   |
| Kansas City, MO                 | 1360                  | 509                   |
| Average/Unknown (Knob Noster)   | 1278                  | 585                   |

- DUA = Discretionary Use Adjustment (reflects the fact that people do not always operate their AC when conditions may call for it).  
 = 0.75 <sup>297</sup>
- 1000 = Converts Btu to kBtu
- $\eta_{Cool}$  = Seasonal Energy Efficiency Ratio of cooling system (kBtu/kWh)  
 = Actual (where it is possible to measure or reasonably estimate). If unknown assume the following:<sup>298</sup>

| Age of Equipment          | $\eta_{Cool}$ Estimate |
|---------------------------|------------------------|
| Before 2006               | 10                     |
| 2006 - 2014               | 13                     |
| Central AC After 1/1/2015 | 13                     |
| Heat Pump After 1/1/2015  | 14                     |

<sup>295</sup> National Climatic Data Center, calculated from 1981-2010 climate normals with a base temp of 65°F.

<sup>296</sup> The base temperature should be the outdoor temperature at which the desired indoor temperature stays constant, in balance with heat loss or gain to the outside and internal gains. Since unconditioned basements are allowed to swing in temperature, are ground coupled, and are usually cool, they have a bigger delta between the two (heating and cooling) base temperatures. 75F for cooling and 50F for heating are used based on professional judgment. Five year average cooling degree days with 75F base temp are provided from DegreeDays.net because the 30 year climate normals from NCDC are not available at base temps above 72F.

<sup>297</sup> This factor's source is: Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p31.

<sup>298</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

$\Delta kWh_{\text{heating}}$  = If electric heat (resistance or heat pump), reduction in annual electric heating due to insulation

$$= \frac{\left( \left( \left( \frac{1}{R_{OldAG}} - \frac{1}{(R_{Added} + R_{OldAG})} \right) * L_{BWT} * H_{BWAG} * (1 - FF) \right) + \left( \left( \frac{1}{R_{OldBG}} - \frac{1}{(R_{Added} + R_{OldBG})} \right) * L_{BWT} * (H_{BWT} - H_{BWAG}) * (1 - FF) \right) \right) * HDD * 24 * DUA * ADJ_{Basement}}{(3412 * \eta_{Heat})}$$

Where

$R_{OldBG}$  = R-value value of foundation wall below grade (including thermal resistance of the earth)<sup>299</sup>

= dependent on depth of foundation ( $H_{\text{basement\_wall\_total}} - H_{\text{basement\_wall\_AG}}$ ):

= Actual R-value of wall plus average earth R-value by depth in table below

For example, for an area that extends 5 feet below grade, an R-value of 7.46 would be selected and added to the existing insulation R-value.

| Below Grade R-value                                 |      |      |      |      |       |       |       |       |       |
|---|------|------|------|------|-------|-------|-------|-------|-------|
| Depth below grade (ft)                              | 0    | 1    | 2    | 3    | 4     | 5     | 6     | 7     | 8     |
| Earth R-value (°F-ft <sup>2</sup> -h/Btu)           | 2.44 | 4.50 | 6.30 | 8.40 | 10.44 | 12.66 | 14.49 | 17.00 | 20.00 |
| Average Earth R-value (°F-ft <sup>2</sup> -h/Btu)   | 2.44 | 3.47 | 4.41 | 5.41 | 6.42  | 7.46  | 8.46  | 9.53  | 10.69 |
| Total BG R-value (earth + R-1.0 foundation) default | 3.44 | 4.47 | 5.41 | 6.41 | 7.42  | 8.46  | 9.46  | 10.53 | 11.69 |

<sup>299</sup> Adapted from Table 1, page 24.4, of the 1977 ASHRAE Fundamentals Handbook

$H_{BWT}$  = Total height of basement wall (ft)

HDD = Heating Degree Days

= dependent on location and whether basement is conditioned:

| Climate Zone<br>(City based upon) | Conditioned<br>Space | Unconditioned<br>Space |
|-----------------------------------|----------------------|------------------------|
|                                   | HDD <sup>300</sup>   | HDD 50 <sup>301</sup>  |
| North East (Fort Madison, IA)     | 4475                 | 2,635                  |
| North West (Lincoln, NE)          | 4905                 | 2,973                  |
| South East (Cape Girardeau, MO)   | 3368                 | 1,747                  |
| South West (Kaiser, MO)           | 3561                 | 1,886                  |
| St Louis, MO                      | 4486                 | 1,911                  |
| Kansas City, MO                   | 4059                 | 2,008                  |
| Average/Unknown (Knob Noster)     | 4037                 | 2,259                  |
| Ameren Missouri Natural Gas       | 4918                 |                        |

$\eta_{Heat}$  = Efficiency of heating system

= Actual. If not available refer to default table below:<sup>302</sup>

| System Type | Age of<br>Equipment | HSPF<br>Estimate | $\eta_{Heat}$ (Effective<br>COP Estimate)<br>(HSPF/3.412)*0.85 |
|-------------|---------------------|------------------|--|
| Heat Pump   | Before 2006         | 6.8              | 1.7  |
|             | 2006 - 2014         | 7.7              | 1.9  |
|             | 2015 and after      | 8.2              | 2.0  |
| Resistance  | N/A                 | N/A              | 1.0  |

$ADJ_{Basement}$  = Adjustment for basement wall insulation to account for prescriptive engineering algorithms overclaiming savings.

= 88%<sup>303</sup>

$\Delta kWh_{heating}$  = If gas furnace heat, kWh savings for reduction in fan run time

=  $\Delta Therms * F_e * 29.3$

$F_e$  = Furnace Fan energy consumption as a percentage of annual fuel

<sup>300</sup> St. Louis and Ameren Missouri Natural Gas are based on HDD65. All others are based on HDD60.

<sup>301</sup> The base temperature should be the outdoor temperature at which the desired indoor temperature stays constant, in balance with heat loss or gain to the outside and internal gains. Since unconditioned basements are allowed to swing in temperature, are ground coupled, and are usually cool, they have a bigger delta between the two (heating and cooling) base temperatures. 75F for cooling and 50F for heating are used based on professional judgment. National Climatic Data Center, calculated from 1981-2010 climate normals.

<sup>302</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.

<sup>303</sup> Based upon comparing algorithm derived savings estimate and evaluated bill analysis estimate in the following 2012 Massachusetts report: “Home Energy Services Impact Evaluation”, August 2012. See “Insulation ADJ calculations.xls” for details or calculation.

$$\begin{aligned} & \text{consumption} \\ & = 3.14\%^{304} \\ 29.3 & = \text{kWh per therm} \end{aligned}$$

**SUMMER COINCIDENT PEAK DEMAND**

$$\Delta kW = \Delta kWh_{cooling} * CF$$

Where:

$$\begin{aligned} CF & = \text{Summer peak coincidence demand (kW) to annual energy (kWh) factor} \\ & = 0.0009474181^{305} \end{aligned}$$

---

<sup>304</sup> F<sub>e</sub> is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy (E<sub>f</sub> in MMBtu/yr) and E<sub>ae</sub> (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2% F<sub>e</sub>. See “Programmable Thermostats Furnace Fan Analysis.xlsx” for reference.

<sup>305</sup> Based on Ameren Missouri 2016 Loadshape for Residential Cooling End-Use.

**NATURAL GAS SAVINGS**

If Natural Gas heating:

$\Delta$ Therms =

$$= \frac{\left( \left( \left( \frac{1}{R_{OldAG}} - \frac{1}{(R_{Added} + R_{OldAG})} \right) * L_{BWT} * H_{BWAG} * (1 - FF) \right) + \left( \left( \frac{1}{R_{OldBG}} - \frac{1}{(R_{Added} + R_{OldBG})} \right) * L_{BWT} * (H_{BWT} - H_{BWAG}) * (1 - FF) \right) \right)}{* HDD * 24 * ADJ_{Basement} (100,000 * \eta_{Heat})}$$

Where

- $\eta_{Heat}$  = Efficiency of heating system
- = Equipment efficiency \* distribution efficiency
- = Actual<sup>306</sup> - If not available, use 71%<sup>307</sup>
- 100,000 = Converts Btu to Therms
- Other factors as defined above

---

<sup>306</sup> Ideally, the System Efficiency should be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

<sup>307</sup> This has been estimated assuming that natural gas central furnace heating is typical for Missouri residences (the predominant heating is gas furnace with 48% of Missouri homes (based on Energy Information Administration, 2009 Residential Energy Consumption Survey). In 2000, 29% of furnaces purchased in Missouri were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment - see Furnace Penetration.xls). Furnaces tend to last up to 20 years and so units purchased 16 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non-condensing furnaces and duct losses, the average heating system efficiency is estimated as follows: ((0.29\*0.92) + (0.71\*0.8)) \* (1-0.15) = 0.71.



**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

### 3.4.6 Storm Windows

#### DESCRIPTION

Storm windows installed on either the interior or exterior of existing window assemblies can reduce both heating and cooling loads by reducing infiltration and solar heat gain, and improving insulation properties. Glass options for storm windows can include traditional clear glazing as well as low-emissivity (Low-E) glazing. Low-E glass is formed by adding an ultra-thin layer of metal to clear glass. The metallic-oxide (pyrolytic) coating is applied when the glass is in its molten state, and the coating becomes a permanent and extremely durable part of the glass. This coating is also known as "hard-coat" Low-E. Low-E glass is designed to redirect heat back towards the source, effectively providing higher insulating properties and lower solar heat gain as compared to traditional clear glass. This characterization captures the savings associated with installing storm windows to an existing window assembly (retrofit).

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

An interior or exterior storm window installed according to manufacturer specifications.

#### DEFINITION OF BASELINE EQUIPMENT

The existing window assembly.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

20 years<sup>308</sup>

#### DEEMED MEASURE COST

The actual capital cost for this measure should be used when available and include both material and labor costs. If unavailable, the cost for a low-e storm window can be assumed as \$7.85/ft<sup>2</sup> of window area (material cost) plus \$30 per window for installation expenses<sup>309</sup>. For clear glazing, cost can be assumed as \$6.72/ft<sup>2</sup> of window area (material cost) plus \$30 per window for installation expenses<sup>310</sup>

#### LOADSHAPE

Building Shell RES

Heating RES (only use this loadshape for gas savings)

---

<sup>308</sup> Task ET-WIN-PNNL-FY13-01\_5.3: Database of Low-e Storm Window Energy Performance across U.S. Climate Zones. KA Cort and TD Culp, September 2013. Prepared for the U.S. Department of Energy by Pacific Northwest National Laboratory. PNNL-22864.

<sup>309</sup> Task ET-WIN-PNNL-FY13-01\_5.3: Database of Low-e Storm Window Energy Performance across U.S. Climate Zones. KA Cort and TD Culp, September 2013. Prepared for the U.S. Department of Energy by Pacific Northwest National Laboratory. PNNL-22864.

<sup>310</sup> A comparison of low-e to clear glazed storm windows available at large national retail outlets showed the average incremental cost for low-e glazing to be \$1.13/ft<sup>2</sup>. Installation costs are identical.

**Algorithm**

**CALCULATION OF SAVINGS**

The following reference tables show savings factors (kBtu/ft<sup>2</sup>) for both heating and cooling loads for each of the seven weather zones defined by the TRM<sup>311</sup>. They are used with savings equations listed in the electric energy and gas savings sections to produce savings estimates. If storm windows are left installed year-round, both heating and cooling savings may be claimed. If they are installed seasonally, only heating savings should be claimed. Savings are dependent on location, storm window location (interior or exterior), glazing type (clear or Low-E) and existing window assembly type.

North East (Fort Madison, IA)

Heating:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 50.1                     | 14.5                     | 50.9               | 13.3               |
|                                 | CLEAR INTERIOR | 52.2                     | 19.2                     | 51.4               | 15.1               |
|                                 | LOW-E EXTERIOR | 54.8                     | 15.0                     | 56.6               | 20.7               |
|                                 | LOW-E INTERIOR | 61.1                     | 22.0                     | 59.3               | 19.0               |

Cooling:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 18.0                     | 8.8                      | 17.5               | 8.0                |
|                                 | CLEAR INTERIOR | 18.7                     | 8.7                      | 19.2               | 8.0                |
|                                 | LOW-E EXTERIOR | 23.8                     | 13.3                     | 23.5               | 7.3                |
|                                 | LOW-E INTERIOR | 22.7                     | 11.7                     | 23.1               | 11.2               |

North West (Lincoln, NE)

Heating:

<sup>311</sup> Savings factors are based on simulation results, documented in “Storm Windows Savings.xlsx”

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 59.4                     | 17.8                     | 60.2               | 16.3               |
|                                 | CLEAR INTERIOR | 61.9                     | 23.0                     | 61.1               | 18.4               |
|                                 | LOW-E EXTERIOR | 65.6                     | 19.1                     | 67.6               | 24.4               |
|                                 | LOW-E INTERIOR | 72.4                     | 26.7                     | 70.5               | 23.3               |

Cooling:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 21.9                     | 10.0                     | 21.4               | 9.1                |
|                                 | CLEAR INTERIOR | 22.8                     | 10.1                     | 23.3               | 9.4                |
|                                 | LOW-E EXTERIOR | 28.0                     | 14.6                     | 27.7               | 8.6                |
|                                 | LOW-E INTERIOR | 27.2                     | 13.3                     | 27.5               | 12.7               |

South East (Cape Girardeau, MO)

Heating:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 40.4                     | 10.8                     | 41.2               | 9.9                |
|                                 | CLEAR INTERIOR | 42.1                     | 14.9                     | 41.4               | 11.7               |
|                                 | LOW-E EXTERIOR | 43.0                     | 10.1                     | 44.6               | 16.3               |
|                                 | LOW-E INTERIOR | 48.7                     | 16.6                     | 47.1               | 14.2               |

Cooling:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 18.8                     | 9.1                      | 18.3               | 8.3                |
|                                 | CLEAR INTERIOR | 19.6                     | 9.1                      | 20.1               | 8.3                |
|                                 | LOW-E EXTERIOR | 24.8                     | 13.7                     | 24.5               | 7.7                |
|                                 | LOW-E INTERIOR | 23.8                     | 12.2                     | 24.1               | 11.6               |

South West (Kaiser, MO)

Heating:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 39.2                     | 10.9                     | 40.0               | 9.9                |
|                                 | CLEAR INTERIOR | 40.8                     | 14.9                     | 40.0               | 11.4               |
|                                 | LOW-E EXTERIOR | 42.6                     | 10.6                     | 44.2               | 16.7               |
|                                 | LOW-E INTERIOR | 48.1                     | 17.0                     | 46.4               | 14.3               |

Cooling:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 20.6                     | 9.9                      | 20.1               | 8.9                |
|                                 | CLEAR INTERIOR | 21.4                     | 9.9                      | 21.9               | 9.0                |
|                                 | LOW-E EXTERIOR | 27.1                     | 14.7                     | 26.8               | 8.6                |
|                                 | LOW-E INTERIOR | 26.1                     | 13.3                     | 26.4               | 12.6               |

St Louis, MO

Heating:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 47.7                     | 13.3                     | 48.5               | 12.3               |
|                                 | CLEAR INTERIOR | 49.8                     | 17.9                     | 49.0               | 14.2               |
|                                 | LOW-E EXTERIOR | 51.5                     | 13.3                     | 53.2               | 19.3               |
|                                 | LOW-E INTERIOR | 57.7                     | 20.3                     | 55.9               | 17.5               |

Cooling:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 23.0                     | 10.5                     | 22.5               | 9.6                |
|                                 | CLEAR INTERIOR | 23.9                     | 10.7                     | 24.4               | 9.8                |
|                                 | LOW-E EXTERIOR | 29.5                     | 15.4                     | 29.3               | 9.3                |
|                                 | LOW-E INTERIOR | 28.8                     | 14.2                     | 29.0               | 13.4               |

Kansas City, MO

Heating:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 57.7                     | 16.8                     | 58.5               | 15.5               |
|                                 | CLEAR INTERIOR | 60.3                     | 22.0                     | 59.5               | 17.8               |
|                                 | LOW-E EXTERIOR | 63.0                     | 17.6                     | 64.8               | 23.1               |
|                                 | LOW-E INTERIOR | 69.8                     | 25.1                     | 67.9               | 22.0               |

Cooling:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 25.4                     | 11.0                     | 24.9               | 10.1               |
|                                 | CLEAR INTERIOR | 26.6                     | 11.4                     | 27.1               | 10.6               |
|                                 | LOW-E EXTERIOR | 31.7                     | 15.7                     | 31.4               | 9.6                |
|                                 | LOW-E INTERIOR | 31.1                     | 14.6                     | 31.4               | 14.0               |

Average/Unknown (Knob Noster)

Heating:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 49.2                     | 13.7                     | 50.0               | 12.7               |
|                                 | CLEAR INTERIOR | 51.4                     | 18.4                     | 50.6               | 14.7               |
|                                 | LOW-E EXTERIOR | 53.0                     | 13.7                     | 54.7               | 19.6               |
|                                 | LOW-E INTERIOR | 59.2                     | 20.7                     | 57.5               | 18.0               |

Cooling:

| Savings in kBtu/ft <sup>2</sup> |                | Base Window Assembly     |                          |                    |                    |
|---------------------------------|----------------|--------------------------|--------------------------|--------------------|--------------------|
|                                 |                | SINGLE PANE, DOUBLE HUNG | DOUBLE PANE, DOUBLE HUNG | SINGLE PANE, FIXED | DOUBLE PANE, FIXED |
| Storm Window Type               | CLEAR EXTERIOR | 19.7                     | 9.5                      | 19.2               | 8.6                |
|                                 | CLEAR INTERIOR | 20.5                     | 9.5                      | 20.9               | 8.6                |
|                                 | LOW-E EXTERIOR | 25.9                     | 14.2                     | 25.6               | 8.1                |
|                                 | LOW-E INTERIOR | 24.9                     | 12.7                     | 25.2               | 12.1               |

**ELECTRIC ENERGY SAVINGS**

$$\Delta kWh = \Delta kWh_{cooling} + \Delta kWh_{heating}$$

Where:

$\Delta kWh_{cooling}$  = If storm windows are left installed during the cooling season and the home has central cooling, the reduction in annual cooling requirement due to air sealing

$$= \frac{\Sigma_{cool} * A}{\eta_{Cool}}$$

$\Sigma_{cool}$  = Savings factor for cooling, as tabulated above.

A = Area (square footage) of storm windows installed.

$\eta_{Cool}$  = Efficiency (SEER) of Air Conditioning equipment (kBtu/kWh)

= Actual (where it is possible to measure or reasonably estimate) - If unknown, assume the following<sup>312</sup>:

| Age of Equipment          | SEER Estimate |
|---------------------------|---------------|
| Before 2006               | 10            |
| 2006 - 2014               | 13            |
| Central AC After 1/1/2015 | 13            |
| Heat Pump After 1/1/2015  | 14            |

$\Delta kWh_{heating}$  = If electric heat (resistance or heat pump), reduction in annual electric heating due to air sealing

$$= \frac{\Sigma_{heat} * A}{\eta_{Heat} * 3.412}$$

$\Sigma_{heat}$  = Savings factor for heating, as tabulated above.

$\eta_{Heat}$  = Efficiency of heating system

= Actual - If not available refer to default table below<sup>313</sup>:

| System Type | Age of Equipment | HSPF Estimate | $\eta_{Heat}$ (Effective COP Estimate) (HSPF/3.412)*0.85 |
|-------------|------------------|---------------|--|
| Heat Pump   | Before 2006      | 6.8           | 1.7  |
|             | 2006 - 2014      | 7.7           | 1.92   |
|             | 2015 and after   | 8.2           | 2.04   |
| Resistance  | N/A              | N/A           | 1  |

3.412 = Converts kBtu to kWh

<sup>312</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

<sup>313</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.



**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$$\Delta kW = \Delta kWh_{cooling} * CF$$

Where:

$\Delta kWh_{cooling}$  = As calculated above.

CF = Summer System Peak Coincidence Factor for Cooling  
 = 0.0009474181<sup>314</sup>

**NATURAL GAS SAVINGS**

If Natural Gas heating:

$$\Delta Therms = \frac{\Sigma_{heat} * A}{\eta_{Heat} * 100}$$

Where:

$\eta_{Heat}$  = Efficiency of heating system  
 = Equipment efficiency \* distribution efficiency  
 = Actual<sup>315</sup> - If not available, use 71%<sup>316</sup>

100 = Converts kBtu to Therms

Other factors as defined above

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>314</sup> Based on Ameren Missouri 2016 Loadshape for Residential Cooling End-Use.

<sup>315</sup> Ideally, the System Efficiency should be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

<sup>316</sup> This has been estimated assuming that natural gas central furnace heating is typical for Missouri residences (the predominant heating is gas furnace with 48% of Missouri homes (based on Energy Information Administration, 2009 Residential Energy Consumption Survey). In 2000, 29% of furnaces purchased in Missouri were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment - see Furnace Penetration.xls). Furnaces tend to last up to 20 years and so units purchased 16 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non-condensing furnaces and duct losses, the average heating system efficiency is estimated as follows: ((0.29\*0.92) + (0.71\*0.8)) \* (1-0.15) = 0.71.

### 3.4.7 Kneewall and Sillbox Insulation

#### DESCRIPTION

This measure describes savings from adding insulation (for example, blown cellulose, spray foam) to wall cavities (this includes kneewall and sillbox areas). This measure requires a member of the implementation staff evaluating the pre- and post-project R-values and to measure surface areas. The efficiency of the heating and cooling equipment in the home should also be evaluated if possible.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

The requirements for participation in the program will be defined by the utilities.

#### DEFINITION OF BASELINE EQUIPMENT

The existing condition will be evaluated by implementation staff or a participating contractor and is likely to be empty wall cavities.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 25 years.<sup>317</sup>

#### DEEMED MEASURE COST

The actual installed cost for this measure should be used in screening.

#### LOADSHAPE

Building Shell RES

Heating RES (only use this loadshape for gas savings)

---



---

#### Algorithm

---



---

#### CALCULATION OF SAVINGS

#### ELECTRIC ENERGY SAVINGS

$$\Delta kWh = (\Delta kWh_{cooling} + \Delta kWh_{heating})$$

Where

$\Delta kWh_{cooling}$  = If central cooling, reduction in annual cooling requirement due to insulation

$$= \frac{\left(\frac{1}{R_{Old}} - \frac{1}{R_{Wall}}\right) * A_{Wall} * (1 - FramingFactor_{Wall}) * CDD * 24 * DUA}{(1000 * \eta_{Cool})}$$

$R_{Wall}$  = R-value of new wall assembly including all layers between inside air and outside air (ft<sup>2</sup>.°F.h/Btu)

$R_{Old}$  = R-value value of existing assembly and any existing insulation

---

<sup>317</sup> Measure Life Report, Residential and Commercial/Industrial Lighting and HVAC Measures, GDS Associates, 2007

(ft<sup>2</sup>. °F.h/Btu)

(Minimum of R-5 for uninsulated assemblies<sup>318</sup>)

$A_{wall}$  = Net area of insulated wall (ft<sup>2</sup>)

$FramingFactor_{wall}$  = Adjustment to account for area of framing  
= 25%<sup>319</sup>

CDD = Cooling Degree Days  
= Dependent on location<sup>320</sup>:

| Climate Zone (City based upon)  | CDD 65 |
|---------------------------------|--------|
| North East (Fort Madison, IA)   | 1200   |
| North West (Lincoln, NE)        | 1174   |
| South East (Cape Girardeau, MO) | 1453   |
| South West (Kaiser, MO)         | 1344   |
| St Louis, MO                    | 1646   |
| Kansas City, MO                 | 1360   |
| Average/Unknown (Knob Noster)   | 1278   |

24 = Converts days to hours

DUA = Discretionary Use Adjustment (reflects the fact that people do not always operate their AC when conditions may call for it)  
= 0.75<sup>321</sup>

1000 = Converts Btu to kBtu

$\eta_{Cool}$  = Seasonal Energy Efficiency Ratio of cooling system (kBtu/kWh)  
= Actual (where it is possible to measure or reasonably estimate) - If unknown, assume the following:<sup>322</sup>

| Age of Equipment          | $\eta_{Cool}$ Estimate |
|---------------------------|------------------------|
| Before 2006               | 10                     |
| 2006 - 2014               | 13                     |
| Central AC after 1/1/2015 | 13                     |
| Heat Pump after 1/1/2015  | 14                     |

<sup>318</sup> An estimate based on review of Madison Gas and Electric, Exterior Wall Insulation, R-value for no insulation in walls, and NREL's Building Energy Simulation Test for Existing Homes (BESTEST-EX).

<sup>319</sup> ASHRAE, 2001, "Characterization of Framing Factors for New Low-Rise Residential Building Envelopes (904-RP)," Table 7.1.

<sup>320</sup> National Climatic Data Center, calculated from 1981-2010 climate normals with a base temperature of 65°F.

<sup>321</sup> This factor's source is: Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research", p31.

<sup>322</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

kWh\_heating = If electric heat (resistance or heat pump), reduction in annual electric heating due to insulation

$$= \frac{\left(\frac{1}{R_{Old}} - \frac{1}{R_{Wall}}\right) * A_{wall} * (1 - FramingFactor_{wall}) * HDD * 24 * ADJ_{Wall}}{(\eta_{Heat} * 3412)}$$

HDD = Heating Degree Days  
 = Dependent on location.<sup>323</sup>

| Climate Zone (City based upon)  | HDD <sup>324</sup> |
|---------------------------------|--------------------|
| North East (Fort Madison, IA)   | 4475               |
| North West (Lincoln, NE)        | 4905               |
| South East (Cape Girardeau, MO) | 3368               |
| South West (Kaiser, MO)         | 3561               |
| St Louis, MO                    | 4486               |
| Kansas City, MO                 | 4059               |
| Average/Unknown (Knob Noster)   | 4037               |
| Ameren Missouri Natural Gas     | 4918               |

ηHeat = Efficiency of heating system  
 = Actual - If not available, refer to default table below:<sup>325</sup>

| System Type | Age of Equipment | HSPF Estimate | ηHeat (Effective COP Estimate) (HSPF/3.412)*0.85 |
|-------------|------------------|---------------|--|
| Heat Pump   | Before 2006      | 6.8           | 1.7  |
|             | 2006 - 2014      | 7.7           | 1.9  |
|             | 2015 and after   | 8.2           | 2.0  |
| Resistance  | N/A              | N/A           | 1.0  |

3412 = Converts Btu to kWh

ADJ<sub>wall</sub> = Adjustment for wall insulation to account for prescriptive engineering

<sup>323</sup> National Climatic Data Center, calculated from 1981-2010 climate normals with a base temp of 60°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.

<sup>324</sup> St. Louis and Ameren Missouri Natural Gas are based on HDD65. All others are based on HDD60.

<sup>325</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.

algorithms consistently overclaiming savings  
 = 63%<sup>326</sup>  
 $\Delta kWh_{heating}$  = If gas *furnace* heat, kWh savings for reduction in fan run time  
 =  $\Delta Therms * F_e * 29.3$

Where:

$F_e$  = Furnace Fan energy consumption as a percentage of annual fuel consumption  
 = 3.14%<sup>327</sup>  
 29.3 = kWh per therm

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$\Delta kW = \Delta kWh_{cooling} * CF$

Where:

CF = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
 = 0.0009474181<sup>328</sup>

**NATURAL GAS SAVINGS**

$\Delta Therms$  (if Natural Gas heating)  

$$= \frac{\left(\frac{1}{R_{old}} - \frac{1}{R_{wall}}\right) * A_{wall} * (1 - FramingFactor_{wall}) * HDD * 24 * ADJWall}{(\eta Heat * 100,000)}$$

Where:

HDD = Heating Degree Days  
 = Dependent on location.<sup>329</sup>

| Climate Zone (City based upon) | HDD <sup>330</sup> |
|--------------------------------|--------------------|
| North East (Fort Madison, IA)  | 4475               |
| North West (Lincoln, NE)       | 4905               |

<sup>326</sup> Based upon comparing algorithm derived savings estimate and evaluated bill analysis estimate in the following 2012 Massachusetts report: “Home Energy Services Impact Evaluation”, August 2012. See “Insulation ADJ calculations.xls” for details or calculation.

<sup>327</sup>  $F_e$  is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy ( $E_f$  in MMBtu/yr) and  $E_{ae}$  (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2%  $F_e$ . See “Furnace Fan Analysis.xls” for reference.

<sup>328</sup> Based on Ameren Missouri 2016 Loadshape for Residential Cooling End-Use.

<sup>329</sup> National Climatic Data Center, calculated from 1981-2010 climate normals with a base temp of 65°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. NOTE: The HDD base temperature for residential measures in the MO-TRM v.1.0 is a non-consensus item. Please refer to Appendix A in Vol 1 of the MO-TRM v1.0 for full documentation of this non-consensus issue and stakeholder positions regarding the appropriate use of HDD60 vs. HDD65. As a non-consensus item, this value should be revisited in future TRM versions.

<sup>330</sup> St. Louis and Ameren Missouri Natural Gas based on HDD65. All others based on HDD60.

| Climate Zone (City based upon)  | HDD <sup>330</sup> |
|---------------------------------|--------------------|
| South East (Cape Girardeau, MO) | 3368               |
| South West (Kaiser, MO)         | 3561               |
| St Louis, MO                    | 4486               |
| Kansas City, MO                 | 4059               |
| Average/Unknown (Knob Noster)   | 4037               |
| Ameren Missouri Natural Gas     | 4918               |

$\eta_{Heat}$  = Efficiency of heating system  
 = Equipment efficiency \* distribution efficiency  
 = Actual<sup>331</sup> - If not available, use 71%<sup>332</sup>  
 100,000 = Converts Btu to Therms  
 Other factors as defined above

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

<sup>331</sup> Ideally, the System Efficiency should be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (<http://www.bpi.org/files/pdf/DistributionEfficiencyTable-BlueSheet.pdf>) or by performing duct blaster testing.

<sup>332</sup> This has been estimated assuming that natural gas central furnace heating is typical for Missouri residences (the predominant heating is gas furnace with 48% of Missouri homes (based on Energy Information Administration, 2009 Residential Energy Consumption Survey). In 2000, 29% of furnaces purchased in Missouri were condensing (based on data from GAMA, provided to Department of Energy during the federal standard setting process for residential heating equipment - see Furnace Penetration.xls). Furnaces tend to last up to 20 years and so units purchased 16 years ago provide a reasonable proxy for the current mix of furnaces in the State. Assuming typical efficiencies for condensing and non-condensing furnaces and duct losses, the average heating system efficiency is estimated as follows:  $((0.29*0.92) + (0.71*0.8)) * (1-0.15) = 0.71$ .

### **3.4.8 Door**

*This measure was not characterized for Version 1 of the Natural Gas TRM.*

### 3.4.9 Wall Insulation

#### DESCRIPTION

Insulation is added to wall cavities. This measure requires a member of the implementation staff evaluating the pre and post R-values and measure surface areas. The efficiency of the heating and cooling equipment in the home should also be evaluated if possible.

This measure was developed to be applicable to the following program types: RF.

If applied to other program types, the measure savings should be verified.

#### DEFINITION OF EFFICIENT EQUIPMENT

This measure requires a member of the implementation staff or a participating contractor to evaluate the pre and post R-values and measure surface areas. The requirements for participation in the program will be defined by the utilities.

#### DEFINITION OF BASELINE EQUIPMENT

The existing condition will be evaluated by implementation staff or a participating contractor and is likely to be empty wall cavities.

#### DEEMED LIFETIME OF EFFICIENT EQUIPMENT

The expected measure life is assumed to be 20 years.<sup>333</sup>

#### DEEMED MEASURE COST

The actual installed cost for this measure should be used in screening.

#### LOADSHAPE

Cooling RES

Heating RES (only use this loadshape for gas savings)

---



---

#### Algorithm

---



---

#### CALCULATION OF SAVINGS

##### ELECTRIC ENERGY SAVINGS

Where available savings from shell insulation measures should be determined through a custom analysis. When that is not feasible for the program the following engineering algorithms can be used with the inclusion of an adjustment factor to de-rate the heating savings.

$$\Delta kWh = (\Delta kWh_{cooling} + \Delta kWh_{heating})$$

Where

$$\Delta kWh_{cooling} = \text{If central cooling, reduction in annual cooling requirement due to wall insulation} \\ = (((1/R_{old} - 1/R_{wall}) * A_{wall} * (1 - \text{Framing\_factor\_wall})) * 24 * \text{CDD} * \text{DUA}) / (1000 * \eta_{Cool}) * \text{ADJ}_{WallCool}$$

$$R_{wall} = \text{R-value of new wall assembly (including all layers between inside air and outside air).}$$

---

<sup>333</sup> As recommended in Navigant ‘ComEd Effective Useful Life Research Report’, May 2018.



R<sub>old</sub> = R-value value of existing assembly and any existing insulation.  
 (Minimum of R-5 for uninsulated assemblies<sup>334</sup>)

A<sub>wall</sub> = Net area of insulated wall (ft<sup>2</sup>)

Framing\_factor\_wall = Adjustment to account for area of framing  
 = 25%<sup>335</sup>

24 = Converts hours to days

CDD = Cooling Degree Days  
 = dependent on location:<sup>336</sup>

| Climate Zone<br>(City based upon) | CDD 65 |
|-----------------------------------|--------|
| North East (Fort Madison, IA)     | 1200   |
| North West (Lincoln, NE)          | 1174   |
| South East (Cape Girardeau, MO)   | 1453   |
| South West (Kaiser, MO)           | 1344   |
| St Louis, MO                      | 1646   |
| Kansas City, MO                   | 1360   |
| Average/Unknown (Knob Noster)     | 1278   |

DUA = Discretionary Use Adjustment (reflects the fact that people do not always operate their AC when conditions may call for it).  
 = 0.75<sup>337</sup>

1000 = Converts Btu to kBtu

η<sub>Cool</sub> = Seasonal Energy Efficiency Ratio of cooling system (kBtu/kWh)  
 = Actual (where new or where it is possible to measure or reasonably estimate). If unknown assume the following:<sup>338</sup>

---

<sup>334</sup> An estimate based on review of Madison Gas and Electric, Exterior Wall Insulation, R-value for no insulation in walls, and NREL's Building Energy Simulation Test for Existing Homes (BESTEST-EX).

<sup>335</sup> ASHRAE, 2001, "Characterization of Framing Factors for New Low-Rise Residential Building Envelopes (904-RP)," Table 7.1

<sup>336</sup> National Climatic Data Center, Cooling Degree Days are based on a base temp of 65°F. There is a county mapping table Volume 1, Section 3.7 providing the appropriate city to use for each county of Illinois.

<sup>337</sup> This factor's source is: Energy Center of Wisconsin, May 2008 metering study; "Central Air Conditioning in Wisconsin, A Compilation of Recent Field Research,"p31.

<sup>338</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Central AC was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time mean that using the minimum standard is appropriate.

| Age of Equipment          | $\eta_{Cool}$ Estimate |
|---------------------------|------------------------|
| Before 2006               | 10                     |
| 2006 - 2014               | 13                     |
| Central AC After 1/1/2015 | 13                     |
| Heat Pump After 1/1/2015  | 14                     |

$ADJ_{WallCool}$  = Adjustment for cooling savings from wall insulation to account for inaccuracies in prescriptive engineering algorithms<sup>339</sup>  
 = 80%

$kWh_{heating}$  = If electric heat (resistance or heat pump), reduction in annual electric heating due to wall insulation  
 =  $\frac{(((1/R_{old} - 1/R_{wall}) * A_{wall} * (1-Framing\_factor_{wall})) * 24 * HDD)}{(\eta_{Heat} * 3412)} * ADJ_{WallHeat}$

HDD = Heating Degree Days  
 = Dependent on location:<sup>340</sup>

| Climate Zone                    | HDD <sup>341</sup> |
|---------------------------------|--------------------|
| North East (Fort Madison, IA)   | 4475               |
| North West (Lincoln, NE)        | 4905               |
| South East (Cape Girardeau, MO) | 3368               |
| South West (Kaiser, MO)         | 3561               |
| St Louis, MO                    | 4486               |
| Kansas City, MO                 | 4059               |
| Average/Unknown (Knob Noster)   | 4037               |
| Ameren Missouri Natural Gas     | 4918               |

$\eta_{Heat}$  = Efficiency of heating system  
 = Actual (where new or where it is possible to measure or reasonably estimate). If not available refer to default table below:<sup>342</sup>

<sup>339</sup> As demonstrated in two years of metering evaluation by Opinion Dynamics, see Memo “Results for AIC PY6 HPwES Billing Analysis”, dated February 20, 2015. TAC negotiated adjustment factor is 80%.

<sup>340</sup> National Climatic Data Center, calculated from 1981-2010 climate normals with a base temp of 60°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. There is a county mapping table in Volume 1, Section 3.7 providing the appropriate city to use for each county of Illinois.

<sup>341</sup> St. Louis and Ameren Missouri Natural Gas are based on HDD65. All others are based on HDD60.

<sup>342</sup> These default system efficiencies are based on the applicable minimum Federal Standards. In 2006 the Federal Standard for Heat Pumps was adjusted. While one would expect the average system efficiency to be higher than this minimum, the likely degradation of efficiencies over time means that using the minimum standard is appropriate. An 85% distribution efficiency is then applied to account for duct losses for heat pumps.

| System Type | Age of Equipment | HSPF Estimate | $\eta_{\text{Heat}}$ (Effective COP Estimate)<br>(HSPF/3.413)*0.85 |
|-------------|------------------|---------------|--|
| Heat Pump   | Before 2006      | 6.8           | 1.7  |
|             | 2006 - 2014      | 7.7           | 1.92   |
|             | 2015 on          | 8.2           | 2.04   |
| Resistance  | N/A              | N/A           | 1  |

3412 = Converts Btu to kWh

$ADJ_{\text{WallHeat}}$  = Adjustment for heating savings to account for inaccuracies in prescriptive engineering algorithms.<sup>343</sup>  
= 60%

$\Delta kWh_{\text{heating}}$  = If gas *furnace* heat, kWh savings for reduction in fan run time  
=  $\Delta \text{Therms} * F_e * 29.3$

$F_e$  = Furnace Fan energy consumption as a percentage of annual fuel consumption  
= 3.14%<sup>344</sup>

29.3 = kWh per therm

**SUMMER COINCIDENT PEAK DEMAND SAVINGS**

$\Delta kW$  =  $\Delta kWh_{\text{cooling}} * CF$

Where:

$CF$  = Summer peak coincidence demand (kW) to annual energy (kWh) factor  
= 0.0009474181<sup>345</sup>

**NATURAL GAS SAVINGS**

If Natural Gas heating:

$\Delta \text{Therms}$  =  $\frac{(((1/R_{\text{old}} - 1/R_{\text{wall}}) * A_{\text{wall}} * (1 - \text{Framing\_factor\_wall})) * 24 * \text{HDD})}{(\eta_{\text{Heat}} * 100,000 \text{ Btu/therm}) * ADJ_{\text{WallHeat}}}$

Where:

<sup>343</sup> As demonstrated in two years of metering evaluation by Opinion Dynamics, see Memo “Results for AIC PY6 HPwES Billing Analysis”, dated February 20, 2015. TAC negotiated adjustment factor is 60%.

<sup>344</sup>  $F_e$  is not one of the AHRI certified ratings provided for residential furnaces, but can be reasonably estimated from a calculation based on the certified values for fuel energy ( $E_f$  in MMBtu/yr) and  $E_{ae}$  (kWh/yr). An average of a 300 record sample (non-random) out of 1495 was 3.14%. This is, appropriately, ~50% greater than the ENERGY STAR® version 3 criteria for 2%  $F_e$ . See “Programmable Thermostats Furnace Fan Analysis.xlsx” for reference.

<sup>345</sup> Based on Ameren Missouri 2016 Loadshape for Residential Cooling End-Use.

HDD = Heating Degree Days  
 = Dependent on location:<sup>346</sup>

| Climate Zone                    | HDD <sup>347</sup> |
|---------------------------------|--------------------|
| North East (Fort Madison, IA)   | 4475               |
| North West (Lincoln, NE)        | 4905               |
| South East (Cape Girardeau, MO) | 3368               |
| South West (Kaiser, MO)         | 3561               |
| St Louis, MO                    | 4486               |
| Kansas City, MO                 | 4059               |
| Average/Unknown (Knob Noster)   | 4037               |
| Ameren Missouri Natural Gas     | 4918               |

$\eta_{\text{Heat}}$  = Efficiency of heating system  
 = Equipment efficiency \* distribution efficiency  
 = Actual (where new or where it is possible to measure or reasonably estimate).<sup>348</sup>  
 If unknown assume 72% for existing system efficiency.<sup>349</sup>  
 Other factors as defined above

**WATER IMPACT DESCRIPTIONS AND CALCULATION**

N/A

**DEEMED O&M COST ADJUSTMENT CALCULATION**

N/A

---

<sup>346</sup> National Climatic Data Center, calculated from 1981-2010 climate normals with a base temp of 60°F, consistent with the findings of Belzer and Cort, Pacific Northwest National Laboratory in “Statistical Analysis of Historical State-Level Residential Energy Consumption Trends,” 2004. There is a county mapping table in Volume 1, Section 3.7 providing the appropriate city to use for each county of Illinois.

<sup>347</sup> St. Louis and Ameren Missouri Natural Gas are based on HDD65. All others are based on HDD60.

<sup>348</sup> Ideally, the System Efficiency should be obtained either by recording the AFUE of the unit, or performing a steady state efficiency test. The Distribution Efficiency can be estimated via a visual inspection and by referring to a look up table such as that provided by the Building Performance Institute: (see ‘BPI Distribution Efficiency Table’) or by performing duct blaster testing.

<sup>349</sup> Based on average Nicor PY4 nameplate efficiencies derated by 15% for distribution losses.

# Natural Gas Deemed Savings Table



Residential Natural Gas Measures

Air Sealing

| Measure Reference No. | Program/Channel | Measure  | Therms Annual Savings | End Use     | EUL  | Inc. Cost | Units          |
|-----------------------|-----------------|--|-----------------------|-------------|------|-----------|----------------|
|                       | Natural Gas     | Air Sealing (1.0 - story home) Known Heating Efficiency    | 7.5                   | Heating RES | 15.0 | Actual    | per square ft. |
|                       | Natural Gas     | Air Sealing (1.5 - story home) Known Heating Efficiency    | 8.5                   | Heating RES | 15.0 | Actual    | per square ft. |
|                       | Natural Gas     | Air Sealing (2.0 - story home) Known Heating Efficiency    | 9.3                   | Heating RES | 15.0 | Actual    | per square ft. |
|                       | Natural Gas     | Air Sealing (3.0 - story home) Known Heating Efficiency    | 10.5                  | Heating RES | 15.0 | Actual    | per square ft. |
|                       | Natural Gas     | Air Sealing (Unknown Home type) Unknown Heating Efficiency | 8.8                   | Heating RES | 15.0 | Actual    | per square ft. |

Ceiling Insulation

| Measure Reference No. | Program/Channel | Measure                       | Therms Annual Savings | End Use     | EUL  | Inc. Cost | Units      |
|-----------------------|-----------------|-------------------------------|-----------------------|-------------|------|-----------|------------|
|                       | Natural Gas     | Ceiling Insulation            | 99.7                  | Heating RES | 25.0 | Actual    | per sq. ft |
|                       | Natural Gas     | Ceiling Insulation with Audit | 65.0                  | Heating RES | 25.0 | Actual    | per sq. ft |

Wall Insulation

| Measure Reference No. | Program/Channel | Measure         | Therms Annual Savings | End Use     | EUL  | Inc. Cost | Units      |
|-----------------------|-----------------|-----------------|-----------------------|-------------|------|-----------|------------|
|                       | Natural Gas     | Wall Insulation | 98.7                  | Heating RES | 25.0 | Actual    | per sq. ft |

Water heater

| Measure Reference No. | Program/Channel | Measure   | Therms Annual Savings | End Use               | EUL  | Inc. Cost | Units    |
|-----------------------|-----------------|---|-----------------------|-----------------------|------|-----------|----------|
|                       | Natural Gas SF  | Tank storage Water Heater (20-50 gallon) ER1 Full Cost      | 45.3                  | Water Heating Res     | 4.0  | \$404.75  | per unit |
|                       | Natural Gas SF  | Tank storage Water Heater (20-50 gallon) ER2 Remaining Life | 20.7                  | Water Heating Res ER2 | 9.0  |           |          |
|                       | Natural Gas SF  | Tank storage Water Heater (20-50 gallon) ROF                | 20.7                  | Water Heating Res     | 13.0 | \$256.00  | per unit |
|                       | Natural Gas SF  | Tankless Water Heater ER1 Full Cost                         | 83.0                  | Water Heating Res     | 7.0  | \$607.52  | per unit |
|                       | Natural Gas SF  | Tankless Water Heater ER2 Remaining Life                    | 15.5                  | Water Heating Res ER2 | 13.0 |           |          |
|                       | Natural Gas SF  | Tankless Water Heater ROF                                   | 15.5                  | Water Heating Res     | 20.0 | \$510.00  | per unit |

Learning Thermostat / Advanced Thermostat

| Measure Reference No. | Program/Channel | Measure  | Therms Annual Savings | End Use     | EUL  | Inc. Cost | Units       |
|-----------------------|-----------------|--|-----------------------|-------------|------|-----------|-------------|
|                       | Natural Gas SF  | Learning Thermostat - Gas Heated / central AC **     | 57.6                  | Heating RES | 10.0 | \$175.00  | per measure |
|                       | Natural Gas SF  | Learning Thermostat - Unknown **                     | 37.42                 | Heating RES | 10.0 | \$175.00  | per measure |
|                       | Natural Gas SF  | Programmable Thermostat - Gas Heated / central AC ** | 52.9                  | Heating RES | 0.0  | \$0.00    | per measure |
|                       | Natural Gas SF  | Programmable Thermostat - Unknown **                 | 34.39                 | Heating RES | 0.0  | \$0.00    | per measure |

Kit Faucet Aerators (Kitchen)

| Measure Reference No. | Program/Channel | Measure                      | Therm Annual Savings | End Use           | EUL  | Inc. Cost | Units       | EPG_Gas |
|-----------------------|-----------------|------------------------------|----------------------|-------------------|------|-----------|-------------|---------|
|                       | Natural Gas SF  | Kit Faucet Aerator (Kitchen) | 4.2                  | Water Heating RES | 10.0 | \$11.33   | per measure | 0.003   |
|                       | Natural Gas MF  | Kit Faucet Aerator (Kitchen) | 5.8                  | Water Heating RES | 10.0 | \$11.33   | per measure | 0.004   |

Residential Natural Gas Measures

Kit Faucet Aerators (Bathroom)

| Measure Reference No. | Program/Channel | Measure                      | Therms Annual Savings | End Use           | EUL  | Inc. Cost | Units       | EPG_Gas |
|-----------------------|-----------------|------------------------------|-----------------------|-------------------|------|-----------|-------------|---------|
|                       | Natural Gas SF  | Kit Faucet Aerator (Kitchen) | 0.7                   | Water Heating RES | 10.0 | \$11.33   | per measure | 0.003   |
|                       | Natural Gas MF  | Kit Faucet Aerator (Kitchen) | 1.6                   | Water Heating RES | 10.0 | \$11.33   | per measure | 0.003   |

Low Flow Showerheads

| Measure Reference No. | Program/Channel | Measure              | Therms Annual Savings | End Use           | EUL  | Inc. Cost | Units       | EPG_Gas |
|-----------------------|-----------------|----------------------|-----------------------|-------------------|------|-----------|-------------|---------|
|                       | Natural Gas SF  | Low Flow Showerheads | 5.2                   | Water Heating RES | 10.0 | \$7.00    | per measure | 0.004   |

Pipe Insulation

| Measure Reference No. | Program/Channel | Measure         | Therms Annual Savings | End Use           | EUL  | Inc. Cost | Units    |
|-----------------------|-----------------|-----------------|-----------------------|-------------------|------|-----------|----------|
| 1272                  | Natural Gas SF  | Pipe Insulation | 0.5                   | Water Heating RES | 12.0 | \$7.10    | per foot |
| 868                   | Natural Gas MF  | Pipe Insulation | 0.7                   | Water Heating RES | 12.0 | \$7.10    | per foot |

Duct Repair (Duct Sealing and Repair - Methodology 3)

| Measure Reference No. | Program/Channel  | Measure  | Therms Annual Savings | End Use     | EUL  | Inc. Cost* | Units - DuctLength (ft.) |
|-----------------------|------------------|--|-----------------------|-------------|------|------------|--------------------------|
|                       | Natural Gas SFLI | Duct Repair (Sealing) -Gas Heating                     | 7.8                   | Heating RES | 20.0 | \$299.34   | 37                       |
|                       | Natural Gas SFLI | Duct Repair (Sealing) - Electric Heating - MH Adjusted | 5.7                   | Heating RES | 20.0 | \$299.34   | 37                       |

Boiler

| Measure Reference No. | Program/Channel | Measure                   | Therms Annual Savings | End Use         | EUL  | Inc. Cost | Units    |
|-----------------------|-----------------|---------------------------|-----------------------|-----------------|------|-----------|----------|
|                       | Natural Gas SF  | Boiler ER1 Full Cost      | 1080.6                | Heating RES     | 9.0  | \$53.05   | per unit |
|                       | Natural Gas SF  | Boiler ER2 Remaining Life | 104.1                 | Heating RES ER2 | 18.0 |           |          |
|                       | Natural Gas SF  | Boiler 85 - 89 ROF        | 104.1                 | Heating RES     | 27.0 | \$278.00  | per unit |
|                       | Natural Gas SF  | Boiler 90 and above ROF   | 433.6                 | Heating RES     | 27.0 | \$884.00  | per unit |

Furnace

| Measure Reference No. | Program/Channel | Measure                    | Therms Annual Savings | End Use         | EUL  | Inc. Cost  | Units    |
|-----------------------|-----------------|----------------------------|-----------------------|-----------------|------|------------|----------|
|                       | Natural Gas SF  | Furnace ER1 Full Cost      |                       | Heating RES     | 6.0  | \$1,254.37 | per unit |
|                       | Natural Gas SF  | Furnace ER2 Remaining Life |                       | Heating RES ER2 | 14.0 |            |          |
|                       | Natural Gas SF  | Tier 1 Furnace ROF         | 329.3                 | Heating RES     | 19.0 | \$628.22   | per unit |
|                       | Natural Gas SF  | Tier 2 Furnace ROF         | 369.1                 | Heating RES     | 19.0 | \$820.53   |          |

Residential Natural Gas Measures

Furnace Tune-up

| Measure Reference No. | Program/Channel | Measure         | Therms Annual Savings | End Use     | EUL | Inc. Cost | Units    |
|-----------------------|-----------------|-----------------|-----------------------|-------------|-----|-----------|----------|
|                       | Natural Gas SF  | Furnace Tune-UP | 62.1                  | Heating RES | 2.0 | \$100.00  | per unit |

Programmable Thermostat

| Measure | Program/Channel | Measure                 | Therms Annual Savings | End Use     | EUL  | Inc. Cost | Units    |
|---------|-----------------|-------------------------|-----------------------|-------------|------|-----------|----------|
|         | Natural Gas SF  | Programmable Thermostat | 26.5                  | Heating RES | 10.0 | \$70.00   | per unit |

ECM/ Blower Motor

| Measure Reference No. | Program/Channel | Measure   | Therms Annual Savings | End Use         | EUL  | Inc. Cost | Units       |
|-----------------------|-----------------|---|-----------------------|-----------------|------|-----------|-------------|
|                       | Natural Gas     | ECM Auto Fan EUL Replacement -SF                              | 10.52                 | Heating RES     | 20.0 | \$97.00   | per measure |
|                       | Natural Gas     | ECM Auto Fan EUL Replacement -MF                              | 10.52                 | Heating RES     | 20.0 | \$97.00   | per measure |
|                       | Natural Gas     | ECM Auto Fan Early Replacement ER 1 (Full Cost) - SF          | 10.52                 | Heating RES     | 6.0  | \$475.00  | per measure |
|                       | Natural Gas     | ECM Auto Fan Early Replacement ER2 (Remaining Life) - SF      | 10.52                 | Heating RES ER2 | 12.0 |           | per measure |
|                       | Natural Gas     | ECM Auto Fan Early Replacement ER 1 (Full Cost) - MF          | 10.52                 | Heating RES     | 6.0  | \$475.00  | per measure |
|                       | Natural Gas     | ECM Auto Fan Early Replacement ER2 (Remaining Life) - MF      | 10.52                 | Heating RES ER2 | 12.0 | \$0.00    | per measure |
|                       | Natural Gas     | ECM Continous Fan EUL Replacement - SF                        | 10.52                 | Heating RES     | 20.0 | \$97.00   | per measure |
|                       | Natural Gas     | ECM Continous Fan EUL Replacement - MF                        | 10.52                 | Heating RES     | 20.0 | \$97.00   | per measure |
|                       | Natural Gas     | ECM Continous Fan Early Replacement ER 1 (Full Cost) - SF     | 10.52                 | Heating RES     | 6.0  | \$475.00  | per measure |
|                       | Natural Gas     | ECM Continous Fan Early Replacement ER2 (Remaining Life) - SF | 10.52                 | Heating RES ER2 | 12.0 |           | per measure |
|                       | Natural Gas     | ECM Continous Fan Early Replacement ER 1 (Full Cost) - MF     | 10.52                 | Heating RES     | 6.0  | \$475.00  | per measure |
|                       | Natural Gas     | ECM Continous Fan Early Replacement ER2 (Remaining Life) - MF | 10.52                 | Heating RES ER2 | 12.0 |           | per measure |



Business Natural Gas Measures

Boiler

| Measure Reference No. | Program/Channel | Measure | Therms Annual Savings | End Use     | EUL  | EUL  | Inc. Cost | Units    | Efficiency | Capacity        |
|-----------------------|-----------------|---------|-----------------------|-------------|------|------|-----------|----------|------------|-----------------|
|                       | Natural Gas BUS | Boiler  | 32.3                  | Heating BUS | 27.0 | 27.0 | \$16      | per unit | 83% AFUE   | <300,000 BTU/hr |
|                       | Natural Gas BUS |         | 64.6                  | Heating BUS | 27.0 | 27.0 | \$31      | per unit | 84% AFUE   |                 |
|                       | Natural Gas BUS |         | 97.0                  | Heating BUS | 27.0 | 27.0 | \$187     | per unit | 85% AFUE   |                 |
|                       | Natural Gas BUS |         | 258.5                 | Heating BUS | 27.0 | 27.0 | \$776     | per unit | 90% AFUE   |                 |
|                       | Natural Gas BUS |         | 323.2                 | Heating BUS | 27.0 | 27.0 | \$1,126   | per unit | 92% AFUE   |                 |
|                       | Natural Gas BUS |         | 452.4                 | Heating BUS | 27.0 | 27.0 | \$3,899   | per unit | 96% AFUE   |                 |

Water heater

| Measure Reference No. | Program/Channel | Measure                                  | Therms Annual Savings | End Use           | EUL  | Inc. Cost | Units    |
|-----------------------|-----------------|--|-----------------------|-------------------|------|-----------|----------|
|                       | Natural Gas BUS | Tank storage Water Heater (20-50 gallon) | 27.2                  | Water Heating BUS | 13.0 | \$256.00  | per unit |

Furnace

| Measure Reference No. | Program/Channel | Measure              | Therms Annual Savings | End Use     | EUL  | Inc. Cost | Units    |
|-----------------------|-----------------|----------------------|-----------------------|-------------|------|-----------|----------|
|                       | Natural Gas BUS | Furnace 92 - 95      | 179.7                 | Heating BUS | 19.0 | \$493.96  | per unit |
|                       | Natural Gas BUS | Furnace 95 and above | 187.9                 | Heating BUS | 19.0 | \$628.22  | per unit |

Programmable Thermostat

| Measure Reference No. | Program/Channel | Measure                                  | Therms Annual Savings | End Use     | EUL | Inc. Cost | Units       |
|-----------------------|-----------------|--|-----------------------|-------------|-----|-----------|-------------|
|                       | Natural Gas BUS | Small Commercial Programmable Thermostat | 62.1                  | Heating BUS | 8.0 | \$181.00  | per measure |

Wall Insulation

| Measure Reference No. | Program/Channel | Measure         | Therms Annual Savings | End Use     | EUL  | Inc. Cost  | Units           |
|-----------------------|-----------------|-----------------|-----------------------|-------------|------|------------|-----------------|
|                       | Natural Gas BUS | Wall Insulation | 10.2                  | Heating BUS | 20.0 | \$1,300.00 | per 1000 sq. ft |

Ceiling Insulation

| Measure Reference No. | Program/Channel | Measure            | Therms Annual Savings | End Use     | EUL  | Inc. Cost | Units           |
|-----------------------|-----------------|--------------------|-----------------------|-------------|------|-----------|-----------------|
|                       | Natural Gas BUS | Ceiling Insulation | 5.4                   | Heating BUS | 20.0 | \$600.00  | per 1000 sq. ft |

Tankless Water heater

| Measure Reference No. | Program/Channel | Measure               | Therms Annual Savings | End Use           | EUL  | Inc. Cost | Units    |
|-----------------------|-----------------|-----------------------|-----------------------|-------------------|------|-----------|----------|
|                       | Natural Gas BUS | Tankless water heater | 29.9                  | Water Heating BUS | 20.0 | \$510.00  | per unit |

Steam Trap

| Measure Reference No. | Program/Channel | Measure    | Therms Annual Savings | End Use           | EUL | Inc. Cost | Units    |
|-----------------------|-----------------|------------|-----------------------|-------------------|-----|-----------|----------|
|                       | Natural Gas BUS | Steam trap | 271.3                 | Miscellaneous BUS | 6.0 | \$177.00  | per unit |

**Business Natural Gas Measures**

**Pre-Rinse Spray Valve**

| Measure Reference No. | Program/Channel | Measure            | Therms Annual Savings | End Use           | EUL | Inc. Cost | Units    |
|-----------------------|-----------------|--------------------|-----------------------|-------------------|-----|-----------|----------|
|                       | Natural Gas BUS | Pre-Rinse Sprayers | 41.4                  | Water Heating BUS | 5.0 | \$92.90   | per unit |

**Rack Oven**

| Measure Reference No. | Program/Channel | Measure          | Therms Annual Savings | End Use           | EUL  | Inc. Cost  | Units    | Pre-Heat | Idle    | Cooking |
|-----------------------|-----------------|------------------|-----------------------|-------------------|------|------------|----------|----------|---------|---------|
|                       | Natural Gas BUS | Single Rack Oven | 1,096                 | Miscellaneous BUS | 12.0 | \$4,933.00 | per unit | 6,000    | 124,681 | 169,500 |
|                       | Natural Gas BUS | Double Rack Oven | 2,316                 | Miscellaneous BUS | 12.0 | \$5,187.00 | per unit | 15,000   | 236,571 | 382,462 |

**Fryer**

| Measure Reference No. | Program/Channel | Measure                       | Therms Annual Savings | End Use           | EUL  | Inc. Cost  | Units    | Idle   | Cooking |
|-----------------------|-----------------|-------------------------------|-----------------------|-------------------|------|------------|----------|--------|---------|
|                       | Natural Gas BUS | Standard Open Deep-Fat Fryer  | 508                   | Miscellaneous BUS | 12.0 | \$0.00     | per unit | 65,769 | 73,286  |
|                       | Natural Gas BUS | Large Vat Open Deep-Fat Fryer | 415                   | Miscellaneous BUS | 12.0 | \$1,120.00 | per unit | 40,364 | 73,286  |

**Steam Cooker**

| Measure Reference No. | Program/Channel | Measure | Therms Annual Savings | End Use           | EUL  | Inc. Cost   | Units    | Idle    | Cooking |
|-----------------------|-----------------|---------|-----------------------|-------------------|------|-------------|----------|---------|---------|
|                       | Natural Gas BUS | 3 Pan   | 634                   | Miscellaneous BUS | 12.0 | \$ 4,150.00 | per unit | 137,606 | 36,005  |
|                       | Natural Gas BUS | 4 Pan   | 690                   | Miscellaneous BUS | 12.0 | \$ 4,150.00 | per unit | 152,934 | 36,005  |
|                       | Natural Gas BUS | 5 Pan   | 741                   | Miscellaneous BUS | 12.0 | \$ 4,150.00 | per unit | 166,955 | 36,005  |
|                       | Natural Gas BUS | 6 Pan   | 789                   | Miscellaneous BUS | 12.0 | \$ 4,150.00 | per unit | 180,048 | 36,005  |
|                       | Natural Gas BUS | 10 Pan  | 1,182                 | Miscellaneous BUS | 12.0 | \$ 4,150.00 | per unit | 287,527 | 36,005  |

**Air Sealing**

| Measure Reference No. | Program/Channel | Measure   | Therms Annual Savings | End Use     | EUL  | Inc. Cost | Units          |
|-----------------------|-----------------|---|-----------------------|-------------|------|-----------|----------------|
|                       | Natural Gas BUS | Air Sealing for small - Commercial office space | 55.3                  | Heating BUS | 15.0 | Actual    | per square ft. |

**Learning Thermostat / Advanced Thermostat**

| Measure Reference No. | Program/Channel | Measure  | Therms Annual Savings | End Use     | EUL | Inc. Cost | Units       |
|-----------------------|-----------------|--|-----------------------|-------------|-----|-----------|-------------|
|                       | Natural Gas BUS | Learning Thermostat - Gas Heated / central AC ** | 124.3                 | Heating BUS | 10  | \$224.00  | per measure |

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

## RED TAG REPAIR PROGRAM

### **APPLICATION**

The Red Tag Repair Program is an experimental program for customers receiving service on Company's Residential Service Rate to receive funding towards minor repairs or replacements of their gas appliances and piping in order to obtain or retain gas service. The Program has two components: (i) Heating Only for Lower Income, and (ii) Avoid Red Tags.

### **AVAILABILITY**

1. Heating Only for Lower Income provides payment assistance to eligible residential customers of the Company, with a household income equal to or less than 80% of Area Median Income, who require repairs or replacement of natural-gas appliances and/or piping that have been red-tagged. If the customer is renting the premises, approval of the landlord will be required. Customers receiving natural gas service to operable permanent space heating equipment ("PSHE"), i.e. furnaces and boilers, do not qualify; this program is designed to assist only those lower income customers who would otherwise be eligible to commence or maintain service, but whose facilities are "red-tagged," that is, whose service will be or is disconnected at the meter or to the PSHE, and are without space heating, due to unsafe PSHE, unsafe piping or unsafe non-space heating appliance where there is no shut off valve to the non-space heating appliance.
2. Avoid Red Tags permits Company's field service representatives ("FSR") who are already on-site to spend a nominal amount of time to perform minor repairs of the customer's gas appliances and piping when doing so would result in the customer gaining or keeping use of service rather than having the piping or appliance "red-tagged" as unsafe.

### **MEASURES AND INCENTIVES**

1. Heating Only for Lower Income - The program provides up to \$25,000 annually to credit customers or reimburse qualified social service agencies within its service territory that can provide or arrange to provide and pay for such emergency service work consistent with the terms set forth herein and at an administrative cost not to exceed 10% of the funds provided. No customer shall receive assistance greater than \$1,000.00 under this Program, with no more than \$700 going towards a PSHE and no more than \$450 going toward each other gas appliance or piping. To the extent repairs are not cost effective, such customers should be referred to the Company's low-income energy efficiency program. In the event customer incentives from the Company's low-income energy efficiency program do not cover the full cost of PSHE replacement, eligible funds from this program can be put towards the energy efficient replacement PSHE equipment.

DATE OF ISSUE December 3, 2018                      DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn                      President                      St. Louis, Missouri  
Name of Officer                      Title                      Address

# UNION ELECTRIC COMPANY GAS SERVICE

Applying to MISSOURI SERVICE AREA

## RED TAG REPAIR PROGRAM (cont'd)

### **MEASURES AND INCENTIVES (cont'd)**

2. Avoid Red Tags - If an FSR determines that any gas appliance should be "red-tagged" as unsafe or out of compliance with applicable codes, but the FSR believes that the problem can be repaired in no more than 15 minutes using parts that cost \$20 or less, the FSR may, with the customer's consent, attempt to affect such repairs in conjunction with utility service at no cost to the customer. At any time that the FSR determines that the repair will fall outside of these parameters, the FSR shall cease the repair effort and proceed in accordance with the Company's safety practices and the Utility Promotional Practices.

DATE OF ISSUE December 3, 2018 DATE EFFECTIVE January 2, 2019

ISSUED BY Michael Moehn President St. Louis, Missouri  
Name of Officer Title Address